



- N.F.P.A. Interchangeable.
- Heavy Duty Air Cylinders
- Flush Mount standard.
- 12 Bore sizes From 1.5" through 14"
- Strokes - available to any practical length
- 18 standard Mounting Styles
- Adjustable Air Cushion Standard
- 250 PSI AIR/OIL
- Two Year Warranty
- Economic Design

**STAR3 SERIES**  
[WWW.STARCYL.COM](http://WWW.STARCYL.COM)



### Light But Made For Heavy Duty Air Cylinder !

#### Piston Rod

High Strength steel. STARNITE (R0) (Nitro-carburization) treatment on the rod gives better corrosion-resistant properties (out performs 12-micron, (.0005 in.) chromium electroplating by ratio up to 20:1.). Improved wear resistance, better lubrication retention, dent resistance without induction hardening (60Rc), environmentally friendly, no surface pitting, flaking, or hydrogen embrittlement. The finish created by the process is a lustrous black. (Available in Chromed Steel (R1) and Chromed Stainless Steel (S1))

#### Tie rods


Corrosion resistant STARNITE (Nitro-carburization), stress proof steel maintains uniform compression on tube end seals. (Available in Stainless Steel)

#### Solid Aluminum Head & Cap

Machined from solid aluminum bar stock (6061 T6) and black anodized for corrosion resistance. (Available in Stainless Steel)

#### The New STARNITE Cast Iron

This bushing has been designed for tough application with side load. The STARNITE Technology improves bearing resistance against wear with an hardened Layer on both parts.

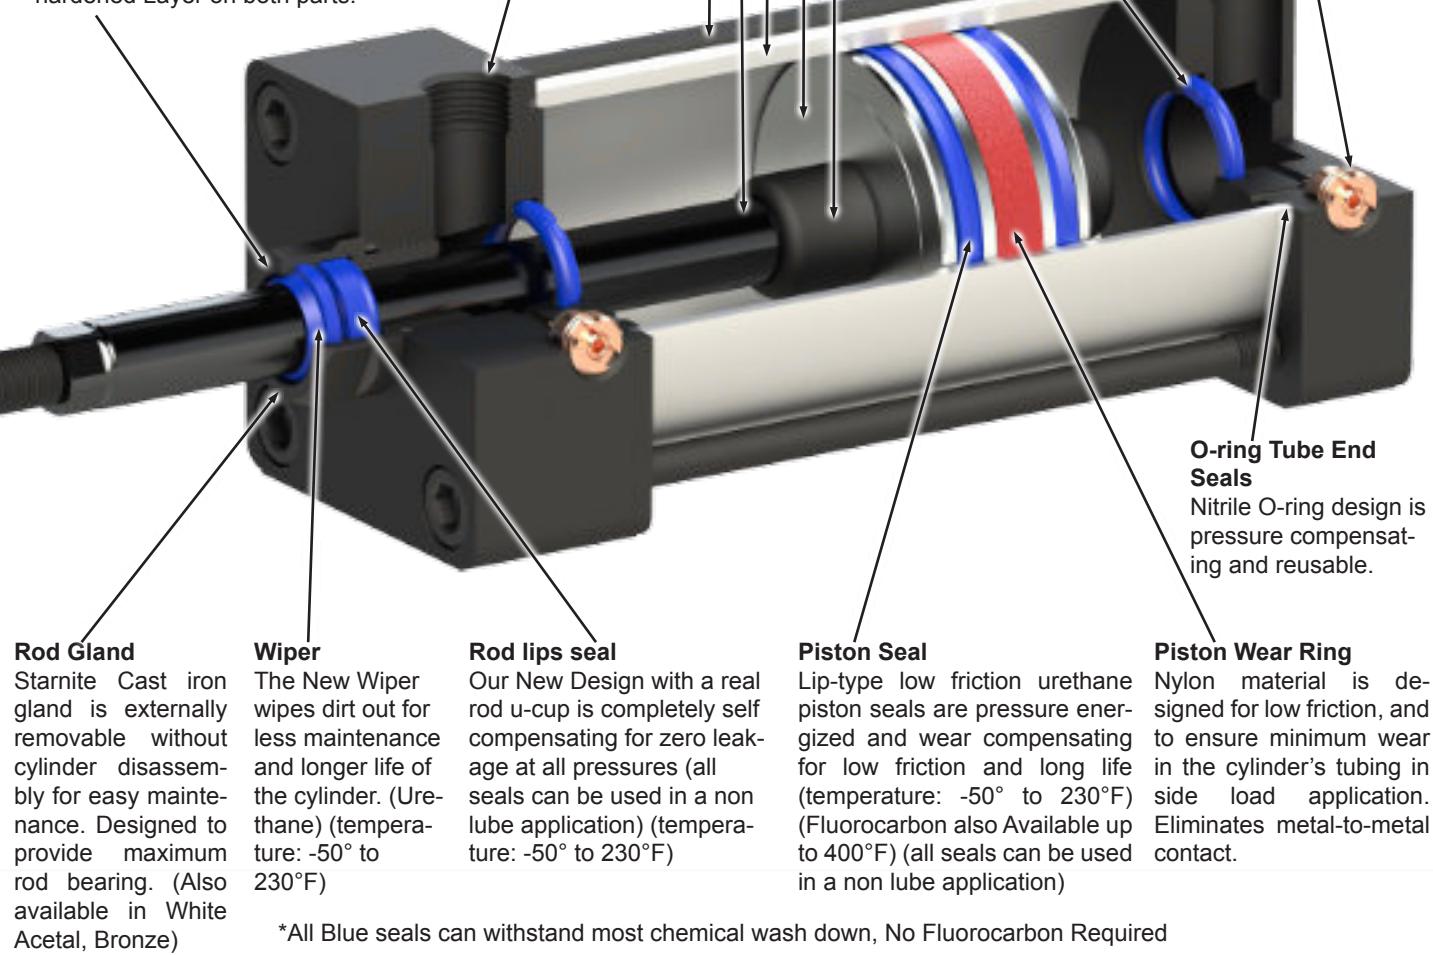

\*All Blue seals can withstand most chemical wash down, No Fluorocarbon Required

### STARNITE

#### The STARNITE process improves component properties


High wear resistance, as well as excellent sliding and running properties, is obtained through STARNITE treatment. The service life of cylinders parts is extended. The finish created by the STARNITE process is a lustrous black.

During the process, which takes place at 1075°F, the metal surface is enriched with nitrogen and carbon. A two part nitrite layer consisting of a mono-phase compound layer and a diffusion layer is formed. Total depth ranges from 0.008-0.040", depending on composition of the base material and treating time. Hardness in the compound layer ranges from approximately HV 700 (60 Rc) to about HV 1600 for high alloyed tools steel. As part of the salt-bath nitriding and QPQP (Quench-Polish & Quench & Polish) sequence, finish-machine parts are polished and chemically processed to produce a highly corrosion-resistant surface with a finish suitable for bearing or seal-type applications.

### ENVIRONMENTALLY & ECONOMICALLY SAFE

#### Corrosion Resistance Evaluation

Test conditions: Spool Shaft, ASTM B-117, (88h) test hours

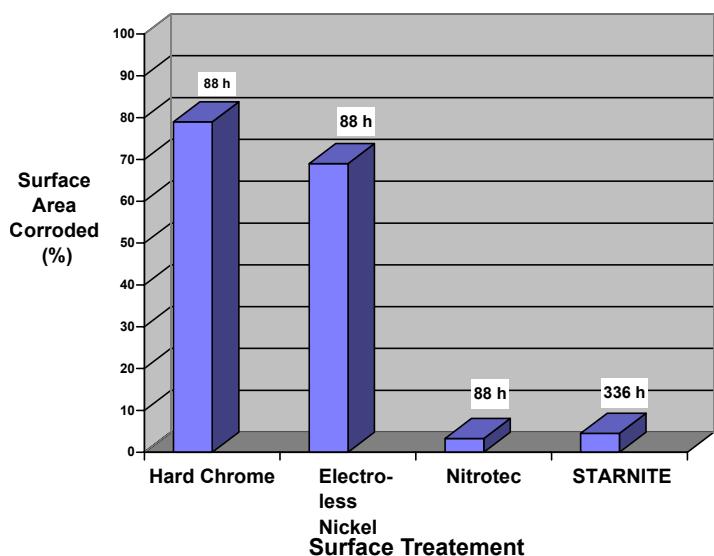


### Chrome plated VS STARNITE

#### Chromed plated cylinders

- Chrome plate can flake and blister.
- Flakes and slivers will destroy seals and glands.
- Loose chrome will cause massive leaking and rapid system failure.
- Chrome lacks dimensional uniformity.

#### STARNITE Process on cylinders

- Superior corrosion resistance.
- Improved wear resistance.
- Better lubrication retention.
- Dent resistance without induction hardening.
- Environmentally Friendly
- No surface pitting, flaking, or hydrogen embrittlement.
- INCREASED SERVICE LIFE.

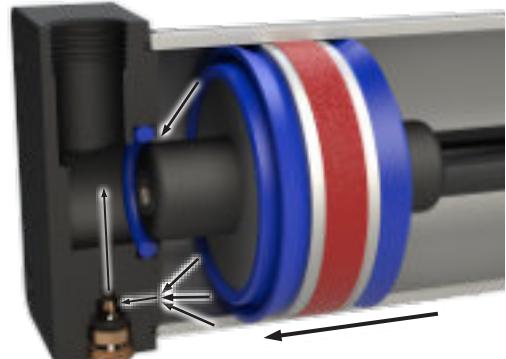

### For End of Stroke Impact Reduction - How it works

Piston Bumper Seals - (Blue Hythane)

Option : -PBS in the Piston Seals selection

The cushioning process begins when the Cushion piston (Spud) enters the dynamic sealing lips (Fig 1.). The seal moves to the back of the groove creating a seal on the inside diameter and on the back of the cushion seal. The exhaust port is closed by the cushion seal. Pressure increases between the piston and the cushion seal due to the movement of the piston toward the end of the cylinder. Cushioning is adjusted by controlling the flow through a throttle port which is regulated by the needle valve.

In addition the Starcyl IMPACT REDUCTION PISTON design includes special lip seals u-cup containing a dampening ring (bumper) which absorbs the remaining kinetic shock vibration and noise created by the impact (Fig. 2) giving a softer and quieter impact. With this design the cycle time can be increased by opening the needle valve of the air cushioning and let the bumpers absorb the rest. The Option NAC "non adjustable cushion" can be also ordered which reduces the restriction of the needle valve.

The return pressure moves the cushion axially (Fig. 3) until the stop cams reach the front of the groove. The pressure is allowed to by-pass the outside diameter of the seal to allow constant acceleration. In the same time, the Bumper seal releases its compression energy to propel the piston away from the end cap, producing an immediate breakaway.

The spud on the other end of the piston enters the cushion seal on the head end and then the process starts over again.

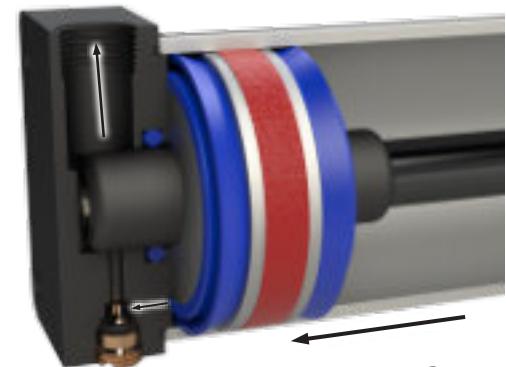


FIG 2

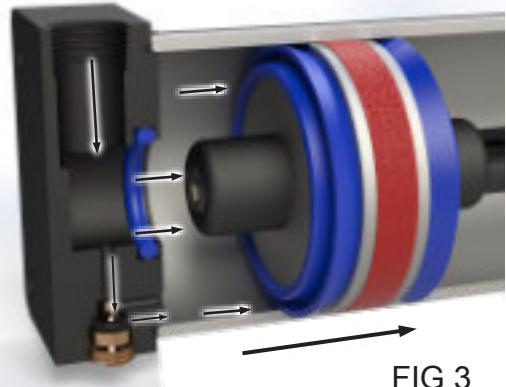


FIG 3

### Effect and Availability of Bumper Seal option

| Effect on Stroke<br>based on Pressure | CYLINDERS BORE |      |      |      |      |      |      |      |
|---------------------------------------|----------------|------|------|------|------|------|------|------|
|                                       | 1.5            | 2.0  | 2.5  | 3.25 | 4.0  | 5.0  | 6.0  | 8.0  |
| 0                                     | 0.14           | 0.15 | 0.17 | 0.19 | 0.22 | 0.25 | 0.25 | 0.25 |
| 20                                    | 0.10           | 0.10 | 0.12 | 0.14 | 0.16 | 0.18 | 0.18 | 0.18 |
| 40                                    | 0.07           | 0.07 | 0.08 | 0.09 | 0.10 | 0.12 | 0.12 | 0.12 |
| 60                                    | 0.04           | 0.04 | 0.05 | 0.05 | 0.06 | 0.07 | 0.07 | 0.07 |
| 80                                    | 0.02           | 0.02 | 0.02 | 0.02 | 0.03 | 0.03 | 0.03 | 0.03 |
| 100                                   | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

## SELECTING BORE SIZE

The following formula may be used in the selection of the proper bore size:

- Extended (push) force in pounds =  
(bore area in sq. in.) x (pressure in psi)

- Retract (pull) force in pounds =  
(bore area in sq. in.) - (Rod area in sq. in.) x (pressure in psi)

Example: 3 1/4 bore, standard rod size 1" & shop air pressure of 90 psi

Push force: 8.296 (sq. in.) x 90 (pound / sq. in.) = 746.64 pounds

Pull force: 8.296 (sq. in.) - 0.785 (sq. in.) x 90 (pound / sq. in.) = 675 pounds


| BORE<br>(IN.) | AREA<br>(SQ. IN.) | ROD SIZE<br>(IN.) | ROD AREA<br>(SQ. IN.) |
|---------------|-------------------|-------------------|-----------------------|
| 1.50          | 1.76              | 5/8               | 0.307                 |
| 2.00          | 3.14              | 5/8               | 0.307                 |
| 2.50          | 4.90              | 5/8               | 0.307                 |
| 3.25          | 8.29              | 1                 | 0.785                 |
| 4.00          | 12.56             | 1                 | 0.785                 |
| 5.00          | 19.64             | 1                 | 0.785                 |
| 6.00          | 28.27             | 1 3/8             | 1.485                 |
| 7.00          | 38.48             | 1 3/8             | 1.485                 |
| 8.00          | 50.26             | 1 3/8             | 1.485                 |
| 10.00         | 78.54             | 1 3/4             | 2.405                 |
| 12.00         | 113.10            | 2                 | 3.14                  |
| 14.00         | 153.90            | 2 1/2             | 4.90                  |

|   |    |
|---|----|
| 1.5 TO 6" BORE - SINGLE ROD MOUNTINGS               | 6  |
| FACE & SIDE MOUNT MX0 - MX5 - MS4.....              | 6  |
| TIE ROD EXTEND MOUNT MX1-MX2-MX3.....               | 8  |
| FLANGE MOUNT MF1 - MF2 .....                        | 10 |
| FIXED PIVOT MOUNT MP1 - MP3.....                    | 12 |
| DETACHABLE PIVOT MOUNT MP1 - MP2- MP4 .....         | 14 |
| TRUNNION MOUNT MT1 - MT2 - MT4 .....                | 16 |
| ST3T4 - Steel Mid Trunnion Mount .....              | 17 |
| FOOT MOUNT MS1 - MS2- MS7 .....                     | 18 |
| END MOUNT ME3 - ME4 - MX5 .....                     | 20 |
| <b>7 TO 14" BORE</b>                                | 20 |
| <b>SINGLE ROD</b>                                   | 20 |
| <b>Specifications</b>                               | 20 |
| CENTER LINE MOUNT MX0 - MX1- MX2 - MX3 .....        | 22 |
| PIVOT MOUNT MP1 - MP2.....                          | 24 |
| TRUNNION MOUNT MT1 - MT2 - MT4 .....                | 26 |
| <b>FOOT MOUNT MS1 - MS2 - MS4</b>                   | 28 |
| FOOT MOUNT MS7 .....                                | 30 |
| <b>7 TO 14" BORE SINGLE ROD</b>                     | 30 |
| <b>OPTIONS - Flow Control</b>                       | 31 |
| SPHERICAL BEARING MSD & MSB MOUNT .....             | 32 |
| ST3SB - 8" to 14" Bore .....                        | 32 |
| <b>1.5 TO 14" BORE SINGLE ROD</b>                   | 32 |
| Cylinder accessories Spherical Bearing .....        | 33 |
| <b>1.5 TO 14" BORE DOUBLE ROD</b>                   | 34 |
| DOUBLE ROD CYLINDER.....                            | 34 |
| BACK TO BACK .....                                  | 36 |
| MULTI-POSITION & TANDEM .....                       | 37 |
| -NRE Non Rotating External Single .....             | 38 |
| -NRED Non Rotating External Double .....            | 38 |
| <b>NON ROTATING EXTERNAL</b>                        | 38 |
| ST3TKS1 Air/Oil Tank Angle Mount.....               | 39 |
| ST3TKS4 Air/Oil Tank Side Taped Mount.....          | 39 |
| ST3TKS4-A Air Tank Side Taped Mount.....            | 39 |
| ST3TKS1-A Air Tank Angle Mount.....                 | 39 |
| <b>AIR/OIL &amp; AIR TANK</b>                       | 39 |
| <b>ALIGNMENT COUPLER</b>                            | 40 |
| AC Alignment coupler - Light Duty .....             | 40 |
| AC Alignment coupler - Heavy Duty .....             | 40 |
| AC Alignment coupler - Medium Duty .....            | 40 |
| <b>ACCESSORIES</b>                                  | 41 |
| STOP TUBE SELECTION .....                           | 42 |
| ROD SIZE SELECTION .....                            | 42 |
| <b>ROD DIA. AND STOP TUBE SELECTION</b>             | 42 |
| Stop Tube Design .....                              | 43 |
| <b>SWITCHES</b>                                     | 46 |
| <b>END OF STROKE SENSOR READY</b>                   | 47 |
| ROD LOCK - LOCKING MECHANISM - MODEL RLA .....      | 48 |
| SAFETY ROD LOCK WITH MANUAL RELEASE MODEL RLS ..... | 50 |
| <b>1.5 TO 8" BORE SAFETY ROD LOCK - RLS</b>         | 51 |
| ROD LOCK DIAGRAM .....                              | 52 |
| <b>7 TO 14" BORE SINGLE ROD</b>                     | 53 |
| <b>STAR3 Mounting Kits</b>                          | 54 |
| <b>STAR3 Manifold</b>                               | 55 |
| <b>STAR3 PARTS &amp; ASSEMBLY</b>                   | 56 |
| <b>STAR3 PARTS &amp; WEIGHT CHART</b>               | 57 |
| <b>HOW TO ORDER</b>                                 | 58 |
| <b>CYLINDERS APPLICATION</b>                        | 44 |
| <b>ROD DIA. AND STOP TUBE SELECTION</b>             | 51 |
| STOP TUBE SELECTION .....                           | 51 |
| <b>OPTIONS 1</b>                                    | 51 |
| <b>OPTIONS 2</b>                                    | 52 |


# STAR3 CYLINDERS

## 1.5 TO 6" BORE - SINGLE ROD MOUNTINGS FACE & SIDE MOUNT MX0 - MX5 - MS4


ST3X5 - Flush Mount - Standard  
NFPA MX5

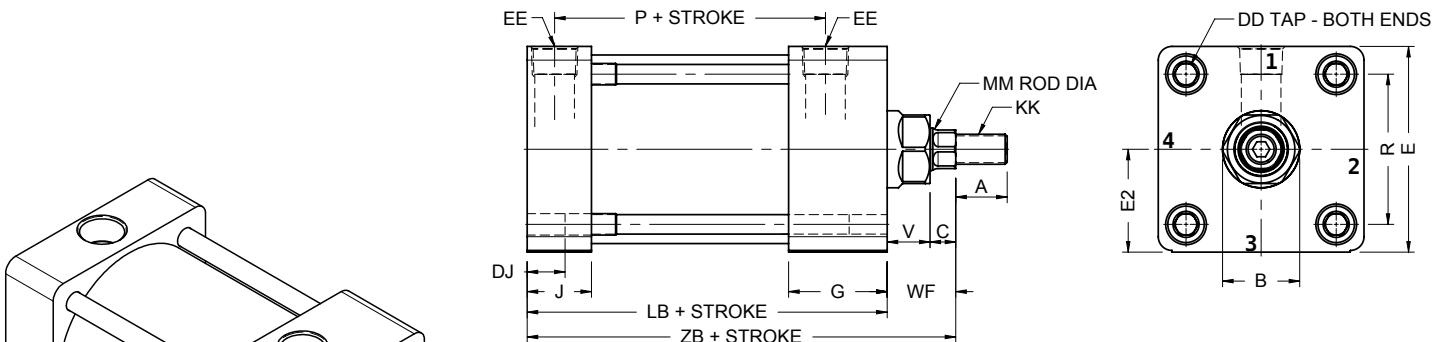

ST3X0 - No Mount  
NFPA MX0

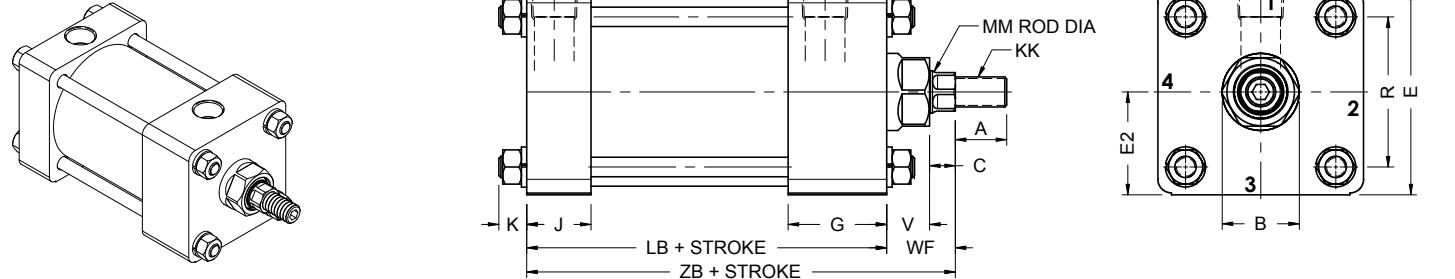


ST3S4 - Bottom Tap Mount  
NFPA MS4

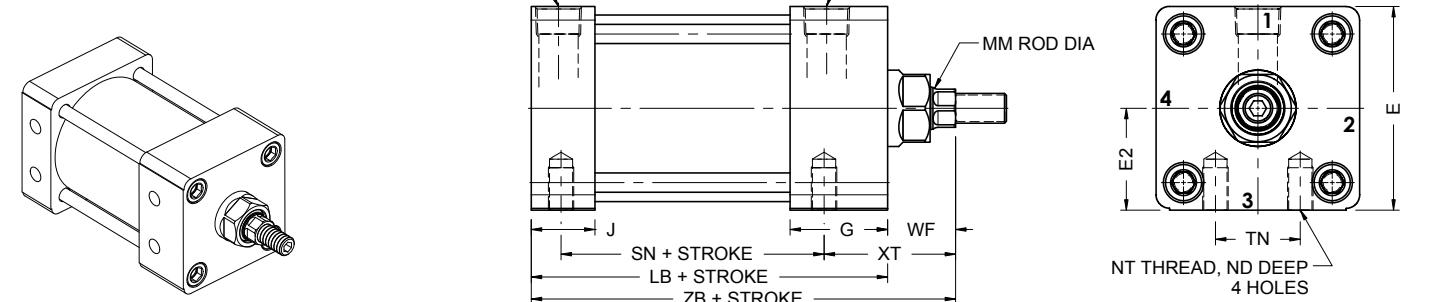

### ROD END STYLE

\* FOR 5/8 & 1" ROD, THE ROD END WILL BE STUDDED #2S STANDARD

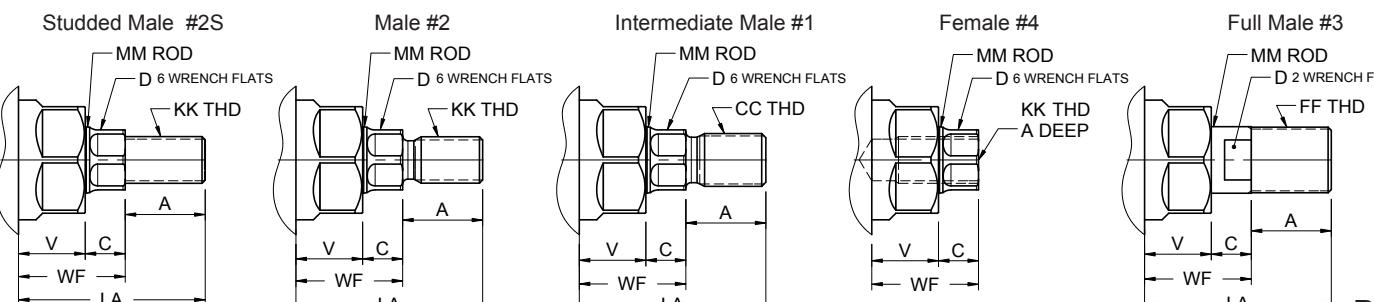

# STAR3 CYLINDERS

## 1.5 TO 6" BORE - SINGLE ROD

Table 1 - Envelope and Mounting Dimensions

| BORE | DD      | DH HEX | DT   | DG    | DJ    | E     | E2<br>+/- .002 | EE<br>NPTF | G       | J      | K    | R    | NT      | TN      | ND    | ADD STROKE |         |       |
|------|---------|--------|------|-------|-------|-------|----------------|------------|---------|--------|------|------|---------|---------|-------|------------|---------|-------|
|      |         |        |      |       |       |       |                |            |         |        |      |      |         |         |       | LB         | P       | SN    |
| 1.5  | 1/4-28  | 1/4    | 0.50 | 13/32 | 7/16  | 2     | 1.000          | 3/8        | 1 7/16  | 15/16  | 1/4  | 1.43 | 1/4-20  | 5/8     | 3/8   | 3 5/8      | 2 21/64 | 2 1/4 |
| 2.0  | 5/16-24 | 5/16   | 0.50 | 7/16  | 7/16  | 2 1/2 | 1.250          | 3/8        | 1 7/16  | 15/16  | 5/16 | 1.84 | 5/16-18 | 7/8     | 1/2   | 3 5/8      | 2 21/64 | 2 1/4 |
| 2.5  | 5/16-24 | 5/16   | 0.50 | 7/16  | 7/16  | 3     | 1.500          | 3/8        | 1 7/16  | 15/16  | 5/16 | 2.19 | 3/8-16  | 1 1/4   | 5/8   | 3 3/4      | 2 29/64 | 2 3/8 |
| 3.25 | 3/8-24  | 3/8    | 0.63 | 9/16  | 9/16  | 3 3/4 | 1.875          | 1/2        | 1 11/16 | 1 3/16 | 3/8  | 2.76 | 1/2-13  | 1 1/2   | 3/4   | 4 1/4      | 2 21/32 | 2 5/8 |
| 4.0  | 3/8-24  | 3/8    | 0.63 | 9/16  | 9/16  | 4 1/2 | 2.250          | 1/2        | 1 11/16 | 1 3/16 | 3/8  | 3.32 | 1/2-13  | 2 1/16  | 3/4   | 4 1/4      | 2 21/32 | 2 5/8 |
| 5.0  | 1/2-20  | 1/2    | 0.75 | 19/32 | 19/32 | 5 1/2 | 2.750          | 1/2        | 1 11/16 | 1 3/16 | 7/16 | 4.10 | 5/8-11  | 2 11/16 | 1     | 4 1/2      | 2 29/32 | 2 7/8 |
| 6.0  | 1/2-20  | 1/2    | 0.75 | 13/32 | 19/32 | 6 1/2 | 3.250          | 3/4        | 1 15/16 | 1 7/16 | 7/16 | 4.88 | 3/4-10  | 3 1/4   | 1 1/8 | 5          | 3 3/32  | 3 1/8 |

Table 2 - Rod Dimensions

| BORE | Rod Size<br>MM | #1<br>CC | #2 & #4<br>KK | #3<br>FF | A     | B<br>+/- .001 | C   | D      | V     | WF    | ADD STROKE |       |  |
|------|----------------|----------|---------------|----------|-------|---------------|-----|--------|-------|-------|------------|-------|--|
|      |                |          |               |          |       |               |     |        |       |       | XT         | ZB    |  |
| 1.5  | 5/8            | 1/2-20   | 7/16-20       | 5/8-18   | 3/4   | 1.123         | 3/8 | 1/2    | 5/8   | 1     | 1 15/16    | 4 5/8 |  |
|      | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 7/8   | 1 3/8 | 2 5/16     | 5     |  |
| 2.0  | 5/8            | 1/2-20   | 7/16-20       | 5/8-18   | 3/4   | 1.123         | 3/8 | 1/2    | 5/8   | 1     | 1 15/16    | 4 5/8 |  |
|      | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 7/8   | 1 3/8 | 2 5/16     | 5     |  |
| 2.5  | 5/8            | 1/2-20   | 7/16-20       | 5/8-18   | 3/4   | 1.123         | 3/8 | 1/2    | 5/8   | 1     | 1 15/16    | 4 3/4 |  |
|      | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 7/8   | 1 3/8 | 2 5/16     | 5 1/8 |  |
| 3.25 | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 7/8   | 1 3/8 | 2 7/16     | 5 5/8 |  |
|      | 1 3/8          | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 5/8 | 1 3/16 | 1     | 1 5/8 | 2 11/16    | 5 7/8 |  |
| 4.0  | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 7/8   | 1 3/8 | 2 7/16     | 5 5/8 |  |
|      | 1 3/8          | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 5/8 | 1 3/16 | 1     | 1 5/8 | 2 11/16    | 5 7/8 |  |
| 5.0  | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 7/8   | 1 3/8 | 2 7/16     | 5 7/8 |  |
|      | 1 3/8          | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 5/8 | 1 3/16 | 1     | 1 5/8 | 2 11/16    | 6 1/8 |  |
| 6.0  | 1 3/8          | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 5/8 | 1 3/16 | 1     | 1 5/8 | 2 13/16    | 6 5/8 |  |
|      | 1 3/4          | 1 1/2-12 | 1 1/4-12      | 1 3/4-12 | 2     | 2.373         | 5/8 | 1 1/2  | 1 1/8 | 1 7/8 | 3 1/16     | 6 7/8 |  |



STARCYL CYLINDER CORP



20 Ron Joye Road, Hemingway  
South Carolina, 29554  
1-877-STARCYL (782-7295)  
www.Starcyl.com

STARCYL CANADA INC

2340 Michelin Street, Laval  
Quebec, Canada, H7L 5C3  
1-877-STARCYL (782-7295)  
www.Starcyl.ca



# STAR3 CYLINDERS

ST3X1 - Tie Rods Extended Both Ends  
NFPA MX1

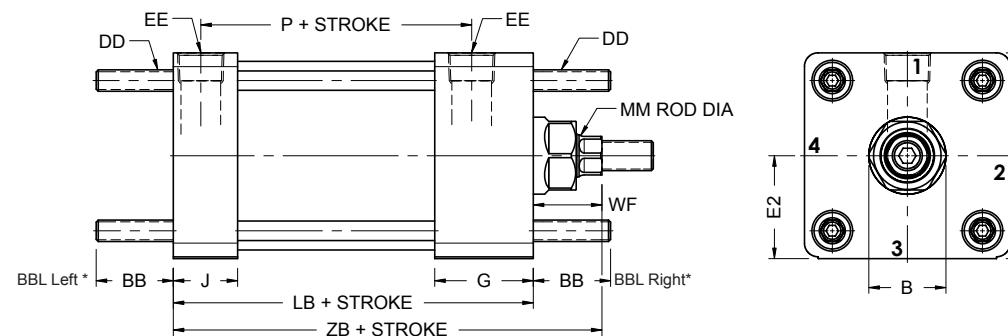
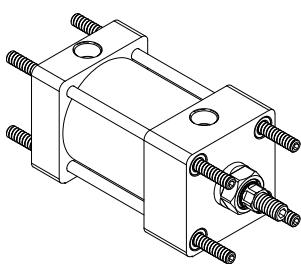


\* If BB dimension need to be Extended - use BBR (Right) or BBL (Left) with the new dimension  
Ex: BBL06.00-BBR04.00 so cap end will be extended to 6" and head end will be extended of 4"

ST3X2 - Tie Rods Extended Cap Mount  
NFPA MX2

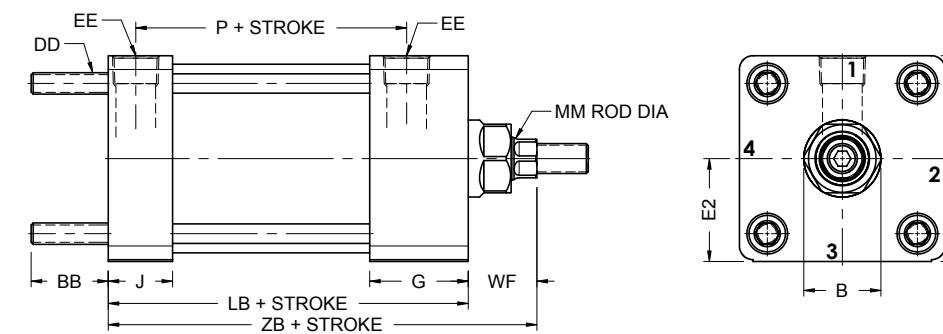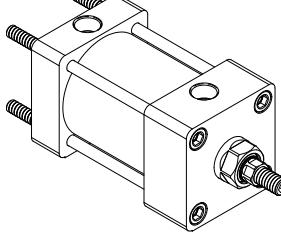


ST3X3 - Tie Rods Extended Head Mount  
NFPA MX3

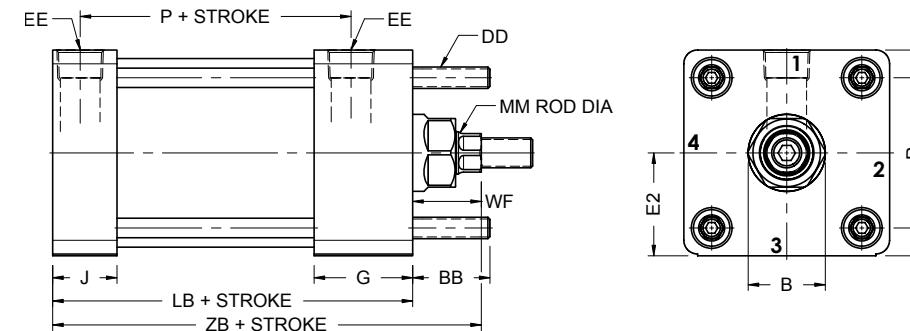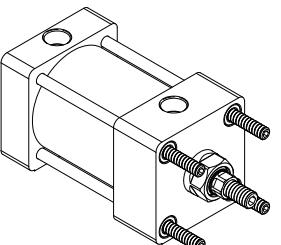

## ROD END STYLE

\* FOR 5/8 & 1" ROD, THE ROD END WILL BE STUDDED #2S STANDARD

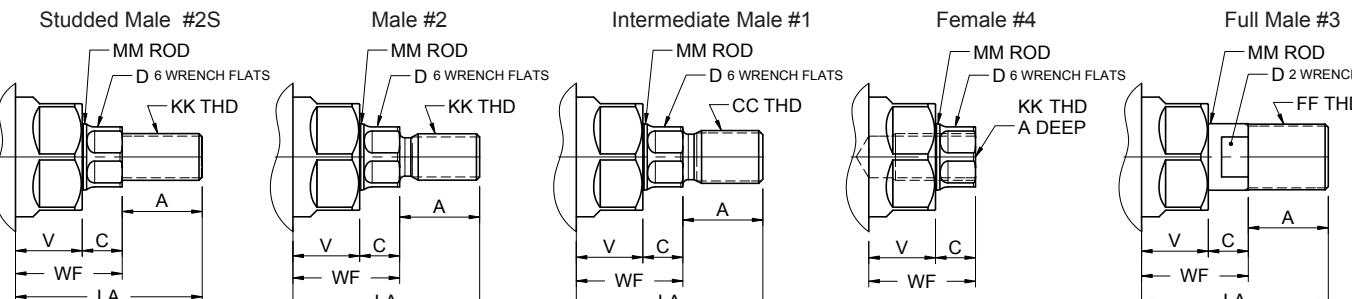

# STAR3 CYLINDERS

1.5 TO 6" BORE  
SINGLE ROD

Table 1 - Envelope and Mounting Dimensions

| BORE | BB      | DD      | E     | E2<br>+/- .002 | EE<br>NPTF | G       | J      | K    | R    | NT      | TN      | TK    | ADD STROKE<br>LB | P       |
|------|---------|---------|-------|----------------|------------|---------|--------|------|------|---------|---------|-------|------------------|---------|
| 1.5  | 1       | 1/4-28  | 2     | 1.000          | 3/8        | 1 7/16  | 15/16  | 1/4  | 1.43 | 1/4-20  | 5/8     | 3/8   | 3 5/8            | 2 21/64 |
| 2.0  | 1 1/8   | 5/16-24 | 2 1/2 | 1.250          | 3/8        | 1 7/16  | 15/16  | 5/16 | 1.84 | 5/16/18 | 7/8     | 1/2   | 3 5/8            | 2 21/64 |
| 2.5  | 1 1/8   | 5/16-24 | 3     | 1.500          | 3/8        | 1 7/16  | 15/16  | 5/16 | 2.19 | 3/8-16  | 1 1/4   | 5/8   | 3 3/4            | 2 29/64 |
| 3.25 | 1 3/8   | 3/8-24  | 3 3/4 | 1.875          | 1/2        | 1 11/16 | 1 3/16 | 3/8  | 2.76 | 1/2-13  | 1 1/2   | 3/4   | 4 1/4            | 2 21/32 |
| 4.0  | 1 3/8   | 3/8-24  | 4 1/2 | 2.250          | 1/2        | 1 11/16 | 1 3/16 | 3/8  | 3.32 | 1/2-13  | 2 1/16  | 3/4   | 4 1/4            | 2 21/32 |
| 5.0  | 1 13/16 | 1/2-20  | 5 1/2 | 2.750          | 1/2        | 1 11/16 | 1 3/16 | 7/16 | 4.10 | 5/8-11  | 2 11/16 | 1     | 4 1/2            | 2 29/32 |
| 6.0  | 1 13/16 | 1/2-20  | 6 1/2 | 3.250          | 3/4        | 1 15/16 | 1 7/16 | 7/16 | 4.88 | 3/4-10  | 3 1/4   | 1 1/8 | 5                | 3 3/32  |

Table 2 - Rod Dimensions

| BORE | Rod Size<br>MM | #1<br>CC | #2 & #4<br>KK | #3<br>FF | A     | B<br>+/- .001 | C   | D      | V     | WF    | Add Stroke<br>ZB |
|------|----------------|----------|---------------|----------|-------|---------------|-----|--------|-------|-------|------------------|
|      |                | 5/8      | 1/2-20        | 7/16-20  |       |               |     |        |       |       |                  |
| 1.5  | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 7/8   | 1 3/8 | 5                |
|      |                |          |               |          |       |               |     |        |       |       |                  |
| 2.0  | 5/8            | 1/2-20   | 7/16-20       | 5/8-18   | 3/4   | 1.123         | 3/8 | 1/2    | 5/8   | 1     | 4 5/8            |
|      | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 7/8   | 1 3/8 | 5                |
| 2.5  | 5/8            | 1/2-20   | 7/16-20       | 5/8-18   | 3/4   | 1.123         | 3/8 | 1/2    | 5/8   | 1     | 4 3/4            |
|      | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 7/8   | 1 3/8 | 5 1/8            |
| 3.25 | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 7/8   | 1 3/8 | 5 5/8            |
|      | 1 3/8          | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 5/8 | 1 3/16 | 1     | 1 5/8 | 5 7/8            |
| 4.0  | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 7/8   | 1 3/8 | 5 5/8            |
|      | 1 3/8          | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 1/2 | 1 3/16 | 1     | 1 5/8 | 5 7/8            |
| 5.0  | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 7/8   | 1 3/8 | 5 7/8            |
|      | 1 3/8          | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 1/2 | 1 3/16 | 1     | 1 5/8 | 6 1/8            |
| 6.0  | 1 3/8          | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 5/8 | 1 3/16 | 1     | 1 5/8 | 6 5/8            |
|      | 1 3/4          | 1 1/2-12 | 1 1/4-12      | 1 3/4-12 | 2     | 2.373         | 5/8 | 1 1/2  | 1 1/8 | 1 7/8 | 6 7/8            |



STARCYL CYLINDER CORP

20 Ron Joye Road, Hemingway  
South Carolina, 29554  
1-877-STARCYL (782-7295)  
www.Starcyl.com



STARCYL CANADA INC

2340 Michelin Street, Laval  
Quebec, Canada, H7L 5C3  
1-877-STARCYL (782-7295)  
www.Starcyl.ca

# STAR3 CYLINDERS



ST3F1 - Detachable Aluminum Head Rectangular Flange

NFPA MF1

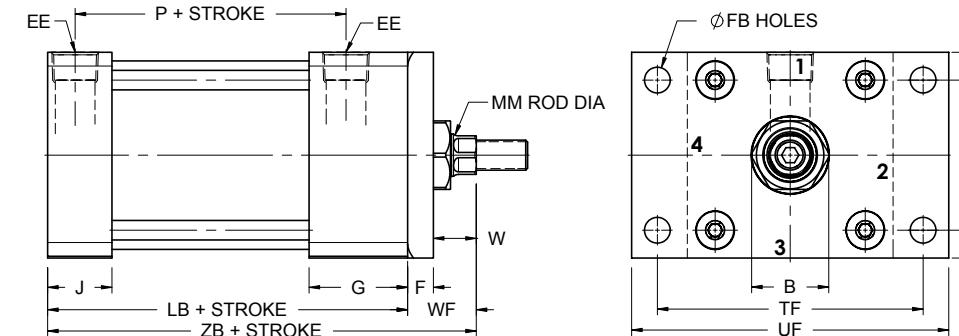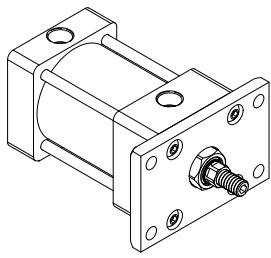



ST3F2 - Detachable Aluminum Cap Rectangular Flange

NFPA MF2

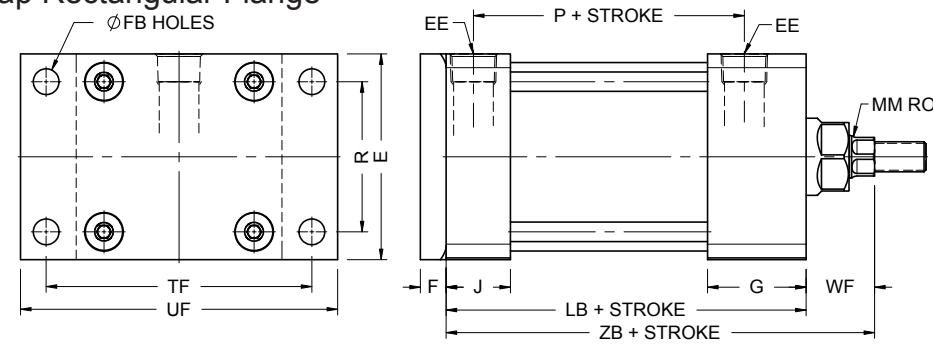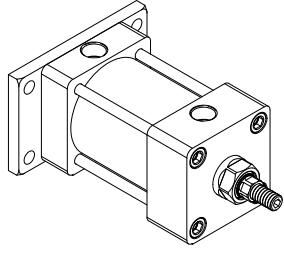



ST3F1X - Steel Head Rectangular Flange

NFPA MF1

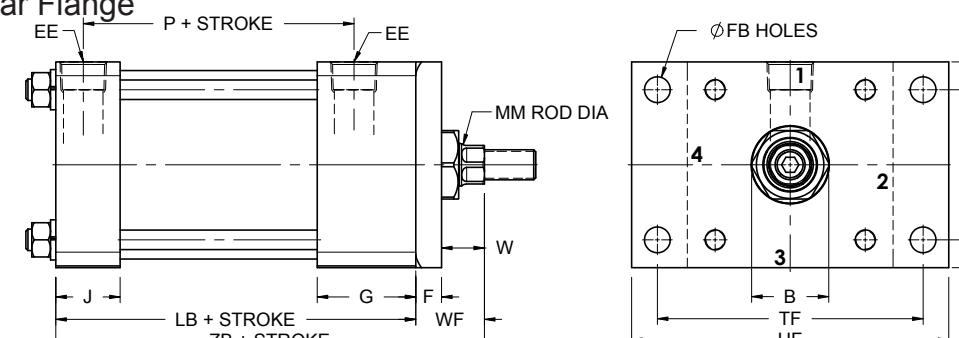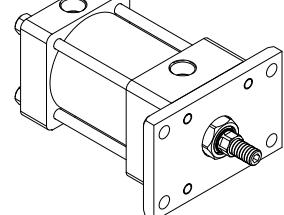


ST3F2X - Steel Cap Rectangular Flange

NFPA MF2

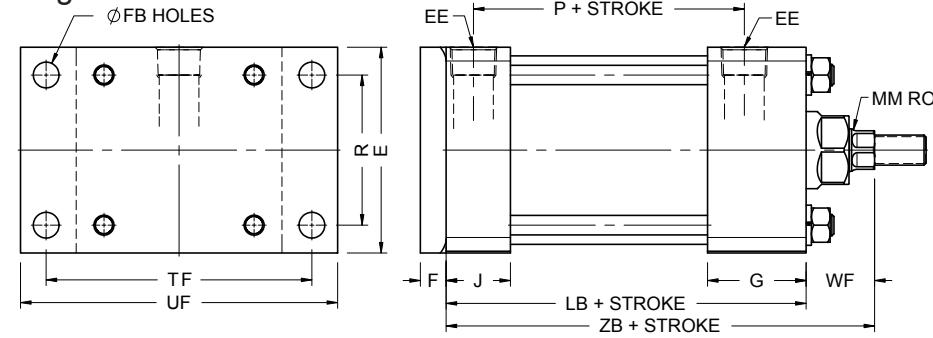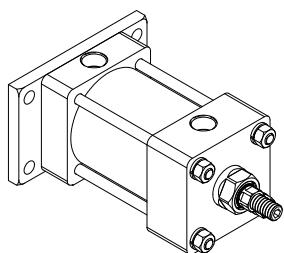

## ROD END STYLE

\* FOR 5/8 & 1" ROD, THE ROD END WILL BE STUDDED #2S STANDARD

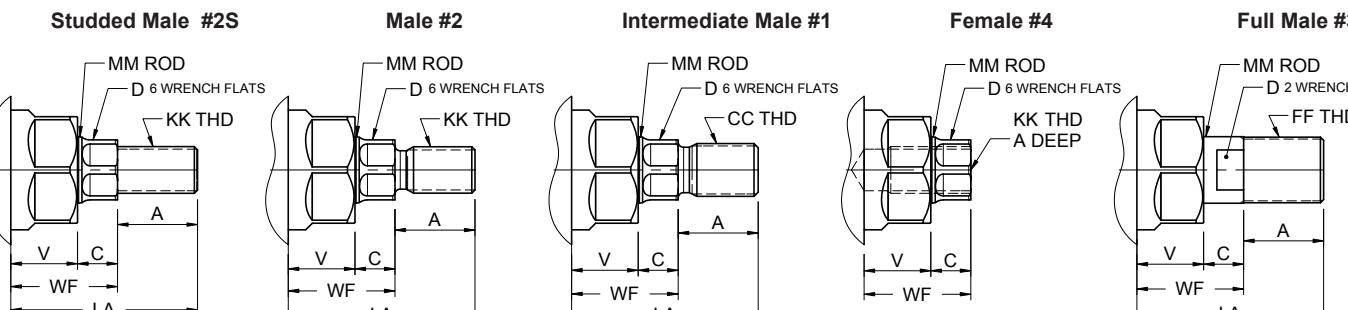

# STAR3 CYLINDERS

Table 1 - Envelope and Mounting Dimensions

| BORE | E     | E2<br>+/- .002 | EE<br>NPTF | F   | FB   | G       | J      | K    | R    | TF      | UF    | ADD STROKE<br>LB | ADD STROKE<br>P |
|------|-------|----------------|------------|-----|------|---------|--------|------|------|---------|-------|------------------|-----------------|
| 1.5  | 2     | 1.000          | 3/8        | 3/8 | 5/16 | 1 7/16  | 15/16  | 1/4  | 1.43 | 2 3/4   | 3 3/8 | 3 5/8            | 2 21/64         |
| 2.0  | 2 1/2 | 1.250          | 3/8        | 3/8 | 3/8  | 1 7/16  | 15/16  | 5/16 | 1.84 | 3 3/8   | 4 1/8 | 3 5/8            | 2 21/64         |
| 2.5  | 3     | 1.500          | 3/8        | 3/8 | 3/8  | 1 7/16  | 15/16  | 5/16 | 2.19 | 3 7/8   | 4 5/8 | 3 3/4            | 2 29/64         |
| 3.25 | 3 3/4 | 1.875          | 1/2        | 5/8 | 7/16 | 1 11/16 | 1 3/16 | 3/8  | 2.76 | 4 11/16 | 5 1/2 | 4 1/4            | 2 21/32         |
| 4.0  | 4 1/2 | 2.250          | 1/2        | 5/8 | 7/16 | 1 11/16 | 1 3/16 | 3/8  | 3.32 | 5 7/16  | 6 1/4 | 4 1/4            | 2 21/32         |
| 5.0  | 5 1/2 | 2.750          | 1/2        | 5/8 | 9/16 | 1 11/16 | 1 3/16 | 7/16 | 4.10 | 6 5/8   | 7 5/8 | 4 1/2            | 2 29/32         |
| 6.0  | 6 1/2 | 3.250          | 3/4        | 3/4 | 9/16 | 1 15/16 | 1 7/16 | 7/16 | 4.88 | 7 5/8   | 8 5/8 | 5                | 3 3/32          |

Table 2 - Rod Dimensions

| BORE | Rod Size<br>MM | #1<br>CC | #2 & #4<br>KK | #3<br>FF | A     | B<br>+/- .001 | C   | D      | V-F | V     | W     | WF    | ADD STROKE<br>ZF | ADD STROKE<br>ZB |       |
|------|----------------|----------|---------------|----------|-------|---------------|-----|--------|-----|-------|-------|-------|------------------|------------------|-------|
|      |                | 5/8      | 1/2-20        | 7/16-20  |       |               |     |        |     |       |       |       | 1                | 5                | 4 5/8 |
| 1.5  | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 1/2 | 7/8   | 1     | 1 3/8 | 5 3/8            | 5                |       |
|      |                |          |               |          |       |               |     |        |     |       |       |       |                  |                  |       |
| 2.0  | 5/8            | 1/2-20   | 7/16-20       | 5/8-18   | 3/4   | 1.123         | 3/8 | 1/2    | 1/4 | 5/8   | 5/8   | 1     | 5                | 4 5/8            |       |
|      | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 1/2 | 7/8   | 1     | 1 3/8 | 5 3/8            | 5                |       |
| 2.5  | 5/8            | 1/2-20   | 7/16-20       | 5/8-18   | 3/4   | 1.123         | 3/8 | 1/2    | 1/4 | 5/8   | 5/8   | 1     | 5 1/8            | 4 3/4            |       |
|      | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 1/2 | 7/8   | 1     | 1 3/8 | 5 1/2            | 5 1/8            |       |
| 3.25 | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 1/4 | 7/8   | 5/8   | 1 3/8 | 6 1/4            | 5 5/8            |       |
|      | 1 3/8          | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 5/8 | 1 3/16 | 3/8 | 1     | 1     | 1 5/8 | 6 1/2            | 5 7/8            |       |
| 4.0  | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 1/4 | 7/8   | 5/8   | 1 3/8 | 6 1/4            | 5 5/8            |       |
|      | 1 3/8          | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 1/2 | 1 3/16 | 3/8 | 1     | 1     | 1 5/8 | 6 1/2            | 5 7/8            |       |
| 5.0  | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 1/4 | 7/8   | 3/4   | 1 3/8 | 6 1/2            | 5 7/8            |       |
|      | 1 3/8          | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 1/2 | 1 3/16 | 3/8 | 1     | 1     | 1 5/8 | 7                | 6 1/8            |       |
| 6.0  | 1 3/8          | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 5/8 | 1 3/16 | 1/4 | 1     | 7/8   | 1 5/8 | 7 3/8            | 6 5/8            |       |
|      | 1 3/4          | 1 1/2-12 | 1 1/4-12      | 1 3/4-12 | 2     | 2.373         | 5/8 | 1 1/2  | 3/8 | 1 1/8 | 1 1/8 | 1 7/8 | 7 5/8            | 6 7/8            |       |



STARCYL CYLINDER CORP

20 Ron Joye Road, Hemingway  
South Carolina, 29554  
1-877-STARCYL (782-7295)  
www.Starcyl.com

STARCYL CANADA INC

2340 Michelin Street, Laval  
Quebec, Canada, H7L 5C3  
1-877-STARCYL (782-7295)  
www.Starcyl.ca



1.5 TO 6" BORE  
SINGLE ROD

# STAR3 CYLINDERS

ST3P1 - Aluminum Fixed Clevis



NFPA MP1

Design for 1.5" & 2" bore (Machined from 1 bloc)

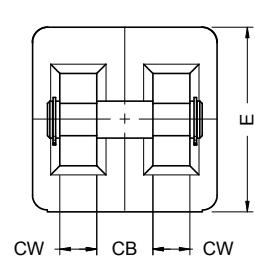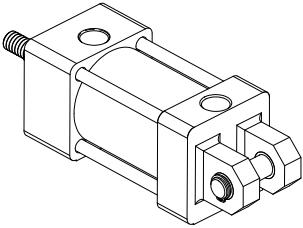

Pin and Snap ring Included

Design for 2 1/2" to 6" bore & 8" bore ( Machined from Extrusion)

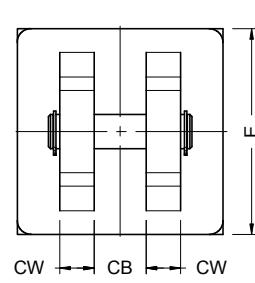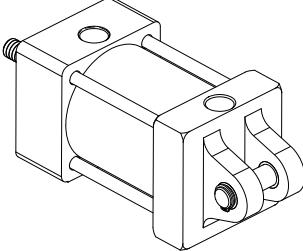



Pin and Snap ring Included

## ST3P3 - Aluminum Extrusion Fixed Eye Mount

NFPA MP3

Available for 1.5" to 6" and 8" Bore

Pin and Snap ring NOT Included

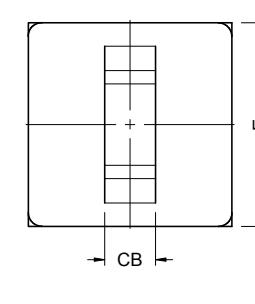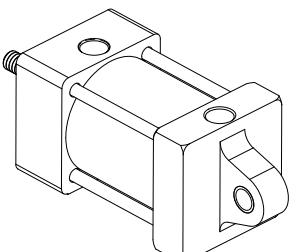


Design for 2 1/2" to 6" bore & 8" bore - Show Above ( Machined from Extrusion)

Design for 1.5" & 2" bore (Machined from 1 bloc) (see MP1 1.5" & 2" for representation )


## ROD END STYLE

\* FOR 5/8 & 1" ROD, THE ROD END WILL BE STUDDED #2S STANDARD


Studded Male #2S

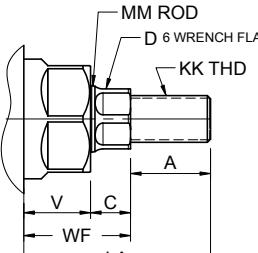


Male #2

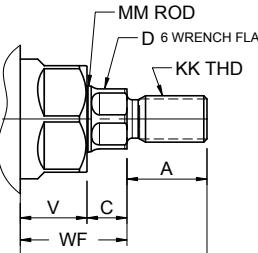


Intermediate Male #1

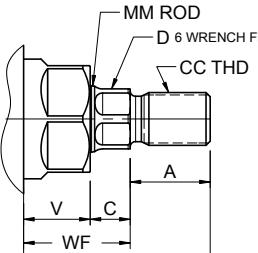

Female #4

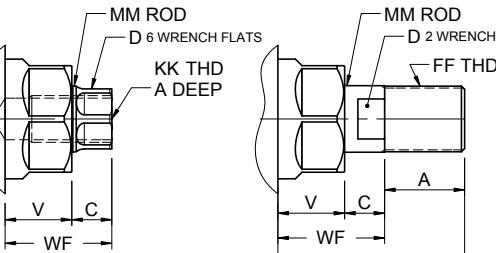

Full Male #3

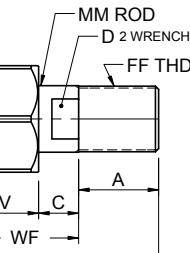

# STAR3 CYLINDERS

## Table 1 - Envelope and Mounting Dimensions


| BORE | E     | E2<br>+/- .002 | EE<br>NPTF | G       | J      | K    | R    | CB    | CD<br>+.000<br>-.002 | CW  | L     | LR    | M     | MR    | ADD STROKE |         |
|------|-------|----------------|------------|---------|--------|------|------|-------|----------------------|-----|-------|-------|-------|-------|------------|---------|
|      |       |                |            |         |        |      |      |       |                      |     |       |       |       |       | LB         | P       |
| 1.5  | 2     | 1.000          | 3/8        | 1 7/16  | 15/16  | 1/4  | 1.43 | 3/4   | .501                 | 1/2 | 3/4   | 5/8   | 1/2   | 5/8   | 3 5/8      | 2 21/64 |
| 2.0  | 2 1/2 | 1.250          | 3/8        | 1 7/16  | 15/16  | 5/16 | 1.84 | 3/4   | .501                 | 1/2 | 3/4   | 5/8   | 1/2   | 5/8   | 3 5/8      | 2 21/64 |
| 2.5  | 3     | 1.500          | 3/8        | 1 7/16  | 15/16  | 5/16 | 2.19 | 3/4   | .501                 | 1/2 | 3/4   | 5/8   | 5/8   | 5/8   | 3 3/4      | 2 29/64 |
| 3.25 | 3 3/4 | 1.875          | 1/2        | 1 11/16 | 1 3/16 | 3/8  | 2.76 | 1 1/4 | .751                 | 5/8 | 1 1/4 | 1 1/8 | 7/8   | 4 1/4 | 2 21/32    |         |
| 4.0  | 4 1/2 | 2.250          | 1/2        | 1 11/16 | 1 3/16 | 3/8  | 3.32 | 1 1/4 | .751                 | 5/8 | 1 1/4 | 1 1/8 | 7/8   | 4 1/4 | 2 21/32    |         |
| 5.0  | 5 1/2 | 2.750          | 1/2        | 1 11/16 | 1 3/16 | 7/16 | 4.10 | 1 1/4 | .751                 | 5/8 | 1 1/4 | 1 1/8 | 7/8   | 4 1/2 | 2 29/32    |         |
| 6.0  | 6 1/2 | 3.250          | 3/4        | 1 15/16 | 1 7/16 | 7/16 | 4.88 | 1 1/2 | 1.001                | 3/4 | 1 1/2 | 1 3/8 | 1 1/4 | 1 1/4 | 5          | 3 3/32  |

## Table 2 - Rod Dimensions

| BORE | Rod<br>Size<br>MM | #1<br>CC | #2 & #4<br>KK | #3<br>FF | A     | B<br>+/- .001 | C   | D      | V     | WF    | ADD STROKE |       |       |        |
|------|-------------------|----------|---------------|----------|-------|---------------|-----|--------|-------|-------|------------|-------|-------|--------|
|      |                   | Xc       | Xd            | Zc       |       |               |     |        |       |       | XC         | XD    | ZC    | ZD     |
| 1.5  | 5/8               | 1/2-20   | 7/16-20       | 5/8-18   | 3/4   | 1.123         | 3/8 | 1/2    | 5/8   | 1     | 5 3/8      | 5 3/4 | 5 7/8 | 6 1/4  |
|      | 1                 | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 7/8   | 1 3/8 | 5 3/4      | 6 1/8 | 6 1/4 | 6 5/8  |
|      |                   |          |               |          |       |               |     |        |       |       |            |       |       |        |
| 2.0  | 5/8               | 1/2-20   | 7/16-20       | 5/8-18   | 3/4   | 1.123         | 3/8 | 1/2    | 5/8   | 1     | 5 3/8      | 5 3/4 | 5 7/8 | 6 1/4  |
|      | 1                 | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 7/8   | 1 3/8 | 5 3/4      | 6 1/8 | 6 1/4 | 6 5/8  |
|      |                   |          |               |          |       |               |     |        |       |       |            |       |       |        |
| 2.5  | 5/8               | 1/2-20   | 7/16-20       | 5/8-18   | 3/4   | 1.123         | 3/8 | 1/2    | 5/8   | 1     | 5 1/2      | 5 7/8 | 6     | 6 3/8  |
|      | 1                 | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 7/8   | 1 3/8 | 5 7/8      | 6 1/4 | 6 3/8 | 6 3/4  |
|      |                   |          |               |          |       |               |     |        |       |       |            |       |       |        |
| 3.25 | 1                 | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 7/8   | 1 3/8 | 6 7/8      | 7 1/2 | 7 5/8 | 8 1/4  |
|      | 1 3/8             | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 5/8 | 1 3/16 | 1     | 1 5/8 | 7 1/8      | 7 3/4 | 7 7/8 | 8 1/2  |
|      |                   |          |               |          |       |               |     |        |       |       |            |       |       |        |
| 4.0  | 1                 | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 7/8   | 1 3/8 | 6 7/8      | 7 1/2 | 7 5/8 | 8 1/4  |
|      | 1 3/8             | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 1/2 | 1 3/16 | 1     | 1 5/8 | 7 1/8      | 7 3/4 | 7 7/8 | 8 1/2  |
|      |                   |          |               |          |       |               |     |        |       |       |            |       |       |        |
| 5.0  | 1                 | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2 | 7/8    | 7/8   | 1 3/8 | 7 1/8      | 7 3/4 | 7 7/8 | 8 1/2  |
|      | 1 3/8             | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 1/2 | 1 3/16 | 1     | 1 5/8 | 7 3/8      | 8     | 8 1/8 | 8 3/4  |
|      |                   |          |               |          |       |               |     |        |       |       |            |       |       |        |
| 6.0  | 1 3/8             | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 5/8 | 1 3/16 | 1     | 1 5/8 | 8 1/8      | 8 7/8 | 9 1/8 | 9 7/8  |
|      | 1 3/4             | 1 1/2-12 | 1 1/4-12      | 1 3/4-12 | 2     | 2.373         | 5/8 | 1 1/2  | 1 1/8 | 1 7/8 | 8 3/8      | 9 1/8 | 9 3/8 | 10 1/8 |
|      |                   |          |               |          |       |               |     |        |       |       |            |       |       |        |




# STAR3 CYLINDERS

## DETACHABLE PIVOT MOUNT MP1 - MP2- MP4

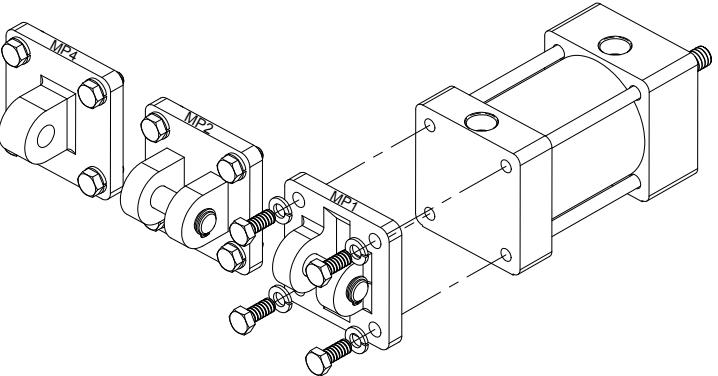




ST3...FA-MP1 Detachable Short Clevis (\*\*sold as Mounting Kit see page XX \*\*)

NFPA MP1

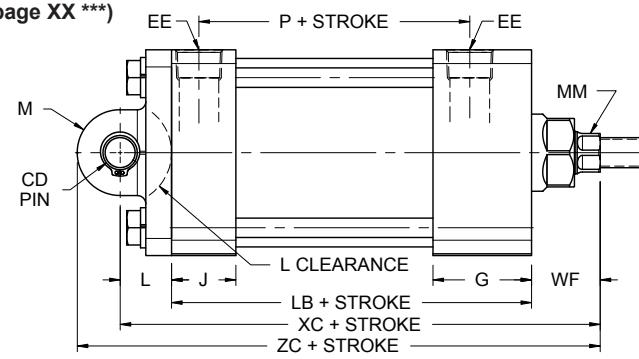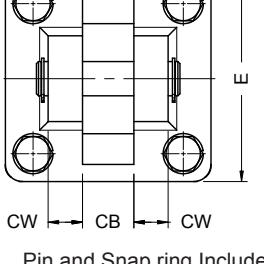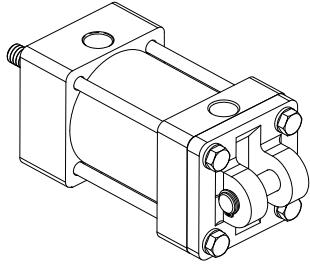




ST3P2 - Detachable Clevis (\*\*Also sold as Mounting Kit see page XX \*\*)

NFPA MP2

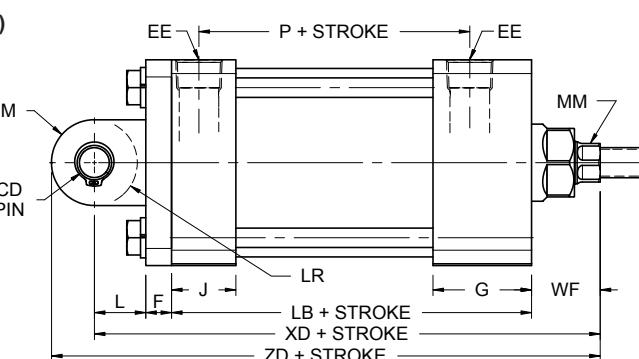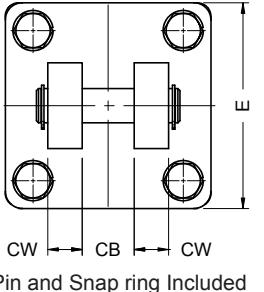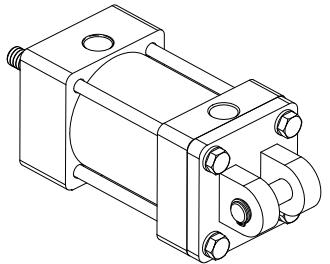


ST3P4 - Detachable Eye Mount (\*\*Also sold as Mounting Kit see page XX \*\*)

NFPA MP4 Available for 1.5" to 6"

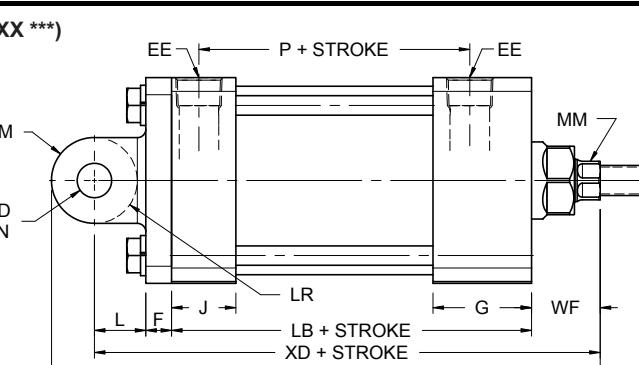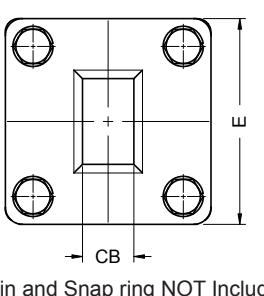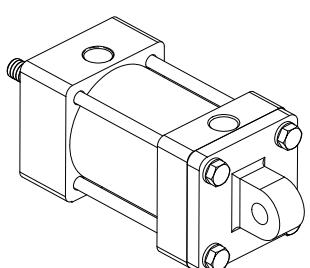


## ROD END STYLE


Studded Male #2S

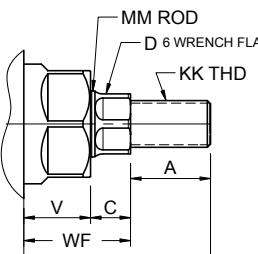


Male #2

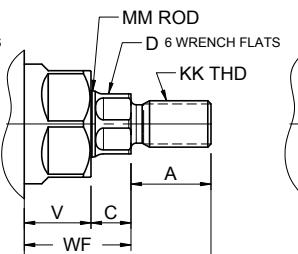


Intermediate Male #1

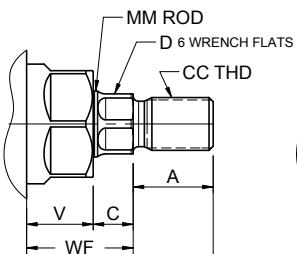

Female #4

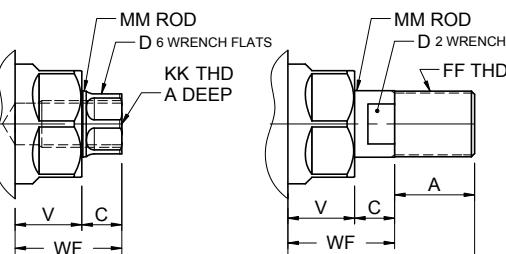

Full Male #3

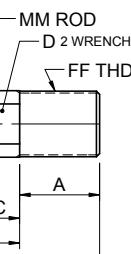

\* FOR 5/8 & 1" ROD, THE ROD END WILL BE STUDDED #2S STANDARD

# STAR3 CYLINDERS

1.5 TO 6" BORE  
SINGLE ROD

Table 1 - Envelope and Mounting Dimensions

| BORE | E     | E2<br>+.002 | EE<br>NPTF | F   | G       | J      | K    | R    | CB    | CD<br>+.000<br>-.002 | CW  | L     | LR    | M     | ADD STROKE |         |
|------|-------|-------------|------------|-----|---------|--------|------|------|-------|----------------------|-----|-------|-------|-------|------------|---------|
|      |       |             |            |     |         |        |      |      |       |                      |     |       |       |       | LB         | P       |
| 1.5  | 2     | 1.000       | 3/8        | 3/8 | 1 7/16  | 15/16  | 1/4  | 1.43 | 3/4   | .501                 | 1/2 | 3/4   | 3/4   | 5/8   | 3 5/8      | 2 21/64 |
| 2.0  | 2 1/2 | 1.250       | 3/8        | 3/8 | 1 7/16  | 15/16  | 5/16 | 1.84 | 3/4   | .501                 | 1/2 | 3/4   | 3/4   | 5/8   | 3 5/8      | 2 21/64 |
| 2.5  | 3     | 1.500       | 3/8        | 3/8 | 1 7/16  | 15/16  | 5/16 | 2.19 | 3/4   | .501                 | 1/2 | 3/4   | 3/4   | 5/8   | 3 3/4      | 2 29/64 |
| 3.25 | 3 3/4 | 1.875       | 1/2        | 5/8 | 1 11/16 | 1 3/16 | 3/8  | 2.76 | 1 1/4 | .751                 | 5/8 | 1 1/4 | 1     | 7/8   | 4 1/4      | 2 21/32 |
| 4.0  | 4 1/2 | 2.250       | 1/2        | 5/8 | 1 11/16 | 1 3/16 | 3/8  | 3.32 | 1 1/4 | .751                 | 5/8 | 1 1/4 | 1     | 5/8   | 4 1/4      | 2 21/32 |
| 5.0  | 5 1/2 | 2.750       | 1/2        | 5/8 | 1 11/16 | 1 3/16 | 7/16 | 4.10 | 1 1/4 | .751                 | 5/8 | 1 1/4 | 1     | 5/8   | 4 1/2      | 2 29/32 |
| 6.0  | 6 1/2 | 3.250       | 3/4        | 3/4 | 1 15/16 | 1 7/16 | 7/16 | 4.88 | 1 1/2 | 1.001                | 3/4 | 1 1/2 | 1 1/4 | 1 1/4 | 5          | 3 3/32  |

Table 2 - Rod Dimensions

| BORE | Rod Size MM | #1 CC    | #2 & #4 KK | #3 FF    | A     | B<br>+.001 | C   | D      | V     | WF    | ADD STROKE |       |       |        |
|------|-------------|----------|------------|----------|-------|------------|-----|--------|-------|-------|------------|-------|-------|--------|
|      |             |          |            |          |       |            |     |        |       |       | XC         | XD    | ZC    | ZD     |
| 1.5  | 5/8         | 1/2-20   | 7/16-20    | 5/8-18   | 3/4   | 1.123      | 3/8 | 1/2    | 5/8   | 1     | 5 3/8      | 5 3/4 | 5 7/8 | 6 1/4  |
|      | 1           | 7/8-14   | 3/4-16     | 1-14     | 1 1/8 | 1.498      | 1/2 | 7/8    | 7/8   | 1 3/8 | 5 3/4      | 6 1/8 | 6 1/4 | 6 5/8  |
|      |             |          |            |          |       |            |     |        |       |       |            |       |       |        |
| 2.0  | 5/8         | 1/2-20   | 7/16-20    | 5/8-18   | 3/4   | 1.123      | 3/8 | 1/2    | 5/8   | 1     | 5 3/8      | 5 3/4 | 5 7/8 | 6 1/4  |
|      | 1           | 7/8-14   | 3/4-16     | 1-14     | 1 1/8 | 1.498      | 1/2 | 7/8    | 7/8   | 1 3/8 | 5 3/4      | 6 1/8 | 6 1/4 | 6 5/8  |
|      |             |          |            |          |       |            |     |        |       |       |            |       |       |        |
| 2.5  | 5/8         | 1/2-20   | 7/16-20    | 5/8-18   | 3/4   | 1.123      | 3/8 | 1/2    | 5/8   | 1     | 5 1/2      | 5 7/8 | 6     | 6 3/8  |
|      | 1           | 7/8-14   | 3/4-16     | 1-14     | 1 1/8 | 1.498      | 1/2 | 7/8    | 7/8   | 1 3/8 | 5 7/8      | 6 1/4 | 6 3/8 | 6 3/4  |
|      |             |          |            |          |       |            |     |        |       |       |            |       |       |        |
| 3.25 | 1           | 7/8-14   | 3/4-16     | 1-14     | 1 1/8 | 1.498      | 1/2 | 7/8    | 7/8   | 1 3/8 | 6 7/8      | 7 1/2 | 7 5/8 | 8 1/4  |
|      | 1 3/8       | 1 1/4-12 | 1-14       | 1 3/8-12 | 1 5/8 | 1.998      | 5/8 | 1 3/16 | 1     | 1 5/8 | 7 1/8      | 7 3/4 | 7 7/8 | 8 1/2  |
|      |             |          |            |          |       |            |     |        |       |       |            |       |       |        |
| 4.0  | 1           | 7/8-14   | 3/4-16     | 1-14     | 1 1/8 | 1.498      | 1/2 | 7/8    | 7/8   | 1 3/8 | 6 7/8      | 7 1/2 | 7 5/8 | 8 1/4  |
|      | 1 3/8       | 1 1/4-12 | 1-14       | 1 3/8-12 | 1 5/8 | 1.998      | 1/2 | 1 3/16 | 1     | 1 5/8 | 7 1/8      | 7 3/4 | 7 7/8 | 8 1/2  |
|      |             |          |            |          |       |            |     |        |       |       |            |       |       |        |
| 5.0  | 1           | 7/8-14   | 3/4-16     | 1-14     | 1 1/8 | 1.498      | 1/2 | 7/8    | 7/8   | 1 3/8 | 7 1/8      | 7 3/4 | 7 7/8 | 8 1/2  |
|      | 1 3/8       | 1 1/4-12 | 1-14       | 1 3/8-12 | 1 5/8 | 1.998      | 1/2 | 1 3/16 | 1     | 1 5/8 | 7 3/8      | 8     | 8 1/8 | 8 3/4  |
|      |             |          |            |          |       |            |     |        |       |       |            |       |       |        |
| 6.0  | 1 3/8       | 1 1/4-12 | 1-14       | 1 3/8-12 | 1 5/8 | 1.998      | 5/8 | 1 3/16 | 1     | 1 5/8 | 8 1/8      | 8 7/8 | 9 1/8 | 9 7/8  |
|      | 1 3/4       | 1 1/2-12 | 1 1/4-12   | 1 3/4-12 | 2     | 2.373      | 5/8 | 1 1/2  | 1 1/8 | 1 7/8 | 8 3/8      | 9 1/8 | 9 3/8 | 10 1/8 |
|      |             |          |            |          |       |            |     |        |       |       |            |       |       |        |

Table 3 - Bolts and Torque

| BORE | Type     | Size    | Torque     |
|------|----------|---------|------------|
| 1.5  | SHCS     | 1/4-28  | 140 in-lbs |
| 2.0  | SHCS     | 5/16-24 | 280 in-lbs |
| 2.5  | SHCS     | 5/16-24 | 280 in-lbs |
| 3.25 | Hex bolt | 3/8-24  | 30 ft-lbs  |
| 4.0  | Hex bolt | 3/8-24  | 30 ft-lbs  |
| 5.0  | Hex bolt | 1/2-20  | 75 ft-lbs  |
| 6.0  | Hex bolt | 1/2-20  | 75 ft-lbs  |





STARCYL CYLINDER CORP

20 Ron Joye Road, Hemingway  
South Carolina, 29554  
1-877-STARCYL (

# STAR3 CYLINDERS



ST3T1 - Detachable Head Trunnion Mount

NFPA MT1

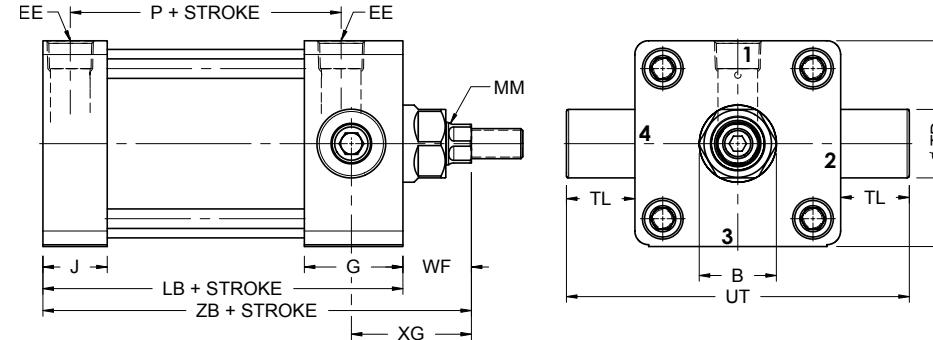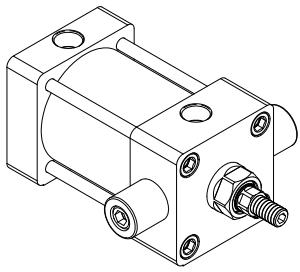



ST3T2 - Detachable Cap Trunnion Mount

NFPA MT2

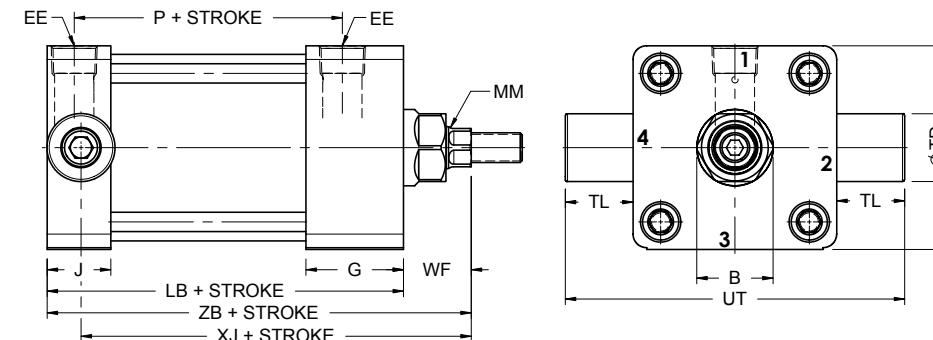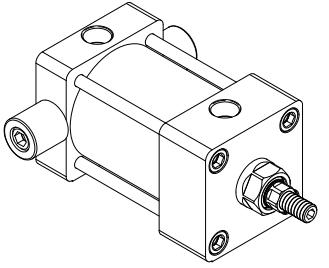



ST3T1X - Steel Fixed Head Trunnion Mount

NFPA MT1

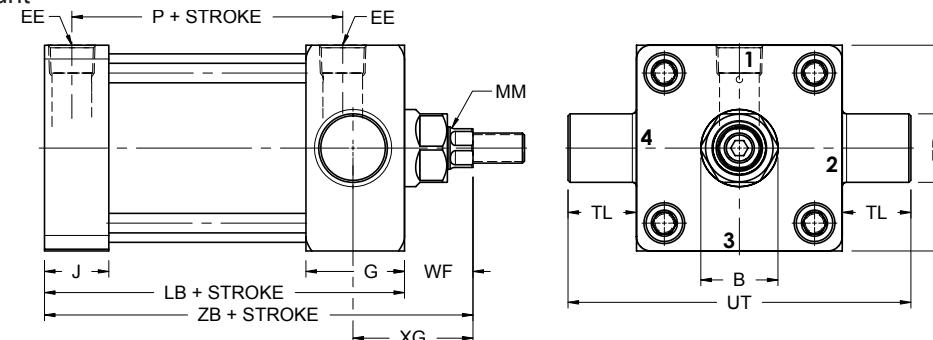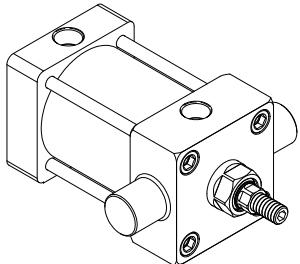


ST3T2X - Steel Fixed Cap Trunnion Mount

NFPA MT2

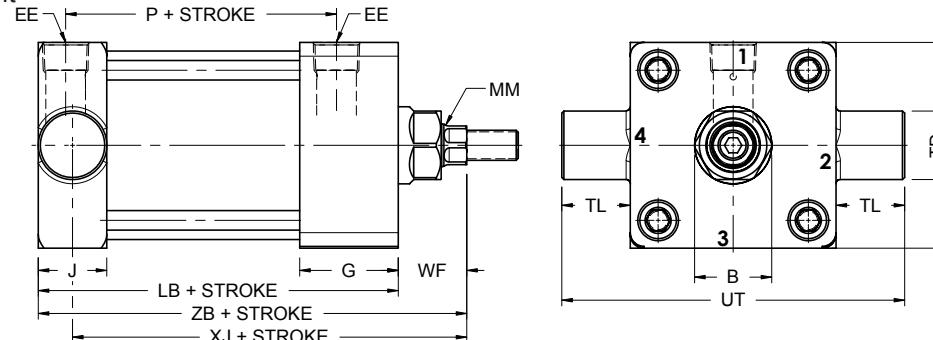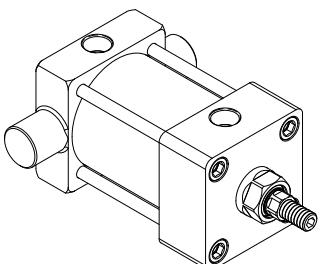


## ROD END STYLE


Studded Male #2S

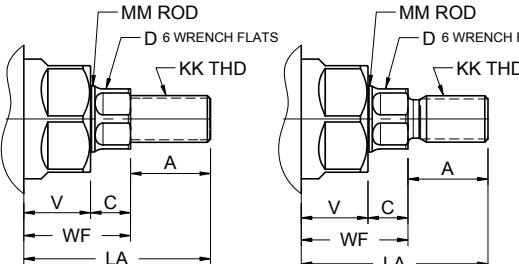


Male #2

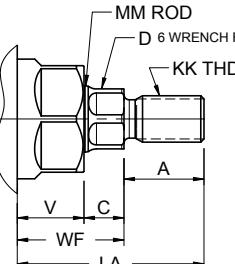


Intermediate Male #1

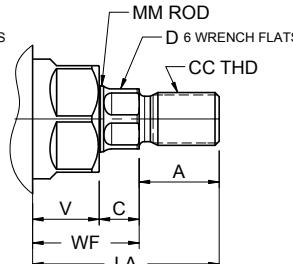

Female #4

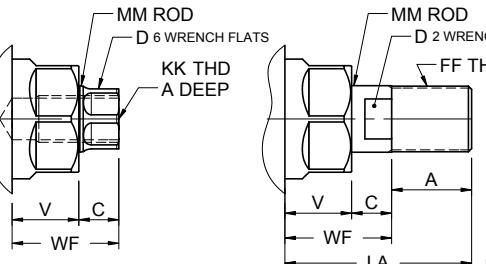

Full Male #3

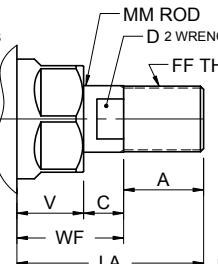

\* FOR 5/8 & 1" ROD, THE ROD END WILL BE STUDDED #2S STANDARD

# STAR3 CYLINDERS

1.5 TO 6" BORE  
SINGLE ROD

Table 1 - Envelope and Mounting Dimensions


| BORE | E     | E2<br><i>+/- .002</i> | EE<br>NPTF | G       | J      | K    | R    | TD<br><i>+.00<br/>-.001</i> | TL    | TM    | UM     | UT    | UV    | ADD STROKE |         |
|------|-------|-----------------------|------------|---------|--------|------|------|-----------------------------|-------|-------|--------|-------|-------|------------|---------|
|      |       |                       |            |         |        |      |      |                             |       |       |        |       |       | LB         | P       |
| 1.5  | 2     | 1.000                 | 3/8        | 1 7/16  | 15/16  | 1/4  | 1.43 | 1                           | 1     | 2 1/2 | 4 1/2  | 4     | 2 1/2 | 3 5/8      | 2 21/64 |
| 2.0  | 2 1/2 | 1.250                 | 3/8        | 1 7/16  | 15/16  | 5/16 | 1.84 | 1                           | 1     | 3     | 5      | 4 1/2 | 3     | 3 5/8      | 2 21/64 |
| 2.5  | 3     | 1.500                 | 3/8        | 1 7/16  | 15/16  | 5/16 | 2.19 | 1                           | 1     | 3 1/2 | 5 1/2  | 5     | 3 1/2 | 3 3/4      | 2 29/64 |
| 3.25 | 3 3/4 | 1.875                 | 1/2        | 1 11/16 | 1 3/16 | 3/8  | 2.76 | 1                           | 1     | 4 1/2 | 6 1/2  | 5 3/4 | 4 1/4 | 2 21/32    |         |
| 4.0  | 4 1/2 | 2.250                 | 1/2        | 1 11/16 | 1 3/16 | 3/8  | 3.32 | 1                           | 1     | 5 1/4 | 7 1/4  | 6 1/2 | 5     | 4 1/4      | 2 21/32 |
| 5.0  | 5 1/2 | 2.750                 | 1/2        | 1 11/16 | 1 3/16 | 7/16 | 4.10 | 1                           | 1     | 6 1/4 | 8 1/4  | 7 1/2 | 6     | 4 1/2      | 2 29/32 |
| 6.0  | 6 1/2 | 3.250                 | 3/4        | 1 15/16 | 1 7/16 | 7/16 | 4.88 | 1 3/8                       | 1 3/8 | 7 5/8 | 10 3/8 | 9 1/4 | 7     | 5          | 3 3/32  |

Table 2 - Rod Dimensions

| BORE | Rod Size<br>MM | #1<br>CC | #2 & #4<br>KK | #3<br>FF | A     | B<br><i>+/- .001</i> | C   | D      | V     | WF    | ADD STROKE |       |         |       |
|------|----------------|----------|---------------|----------|-------|----------------------|-----|--------|-------|-------|------------|-------|---------|-------|
|      |                |          |               |          |       |                      |     |        |       |       | XG         | XJ    | Min Xi  | ZB    |
| 1.5  | 5/8            | 1/2-20   | 7/16-20       | 5/8-18   | 3/4   | 1.123                | 3/8 | 1/2    | 5/8   | 1     | 1 3/4      | 4 1/8 | 3 3/16  | 4 5/8 |
|      | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498                | 1/2 | 7/8    | 7/8   | 1 3/8 | 2 1/8      | 4 1/2 | 3 9/16  | 5     |
|      | 5/8            | 1/2-20   | 7/16-20       | 5/8-18   | 3/4   | 1.123                | 3/8 | 1/2    | 5/8   | 1     | 1 3/4      | 4 1/8 | 3 5/16  | 4 5/8 |
| 2.0  | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498                | 1/2 | 7/8    | 7/8   | 1 3/8 | 2 1/8      | 4 1/2 | 3 11/16 | 5     |
|      | 5/8            | 1/2-20   | 7/16-20       | 5/8-18   | 3/4   | 1.123                | 3/8 | 1/2    | 5/8   | 1     | 1 3/4      | 4 1/4 | 3 5/16  | 4 3/4 |
|      | 1 3/8          |          |               |          |       |                      |     |        |       |       |            |       |         | 5 1/4 |
| 2.5  | 5/8            | 1/2-20   | 7/16-20       | 5/8-18   | 3/4   | 1.123                | 3/8 | 1/2    | 5/8   | 1     | 1 3/4      | 4 1/4 | 3 5/16  | 4 3/4 |
|      | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498                | 1/2 | 7/8    | 7/8   | 1 3/8 | 2 1/8      | 4 5/8 | 3 11/16 | 5 1/8 |
|      | 1 3/8          |          |               |          |       |                      |     |        |       |       |            |       |         | 5 3/8 |
| 3.25 | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498                | 1/2 | 7/8    | 7/8   | 1 3/8 | 2 1/4      | 5     | 4 3/16  | 5 5/8 |
|      | 1 3/8          | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998                | 5/8 | 1 3/16 | 1     | 1 5/8 | 2 1/2      | 5 1/4 | 4 7/16  | 5 7/8 |
|      | 1 3/4          |          |               |          |       |                      |     |        |       |       |            |       |         | 6 1/8 |
| 4.0  | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498                | 1/2 | 7/8    | 7/8   | 1 3/8 | 2 1/4      | 5     | 4 3/16  | 5 5/8 |
|      | 1 3/8          | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998                | 1/2 | 1 3/16 | 1     | 1 5/8 | 2 1/2      | 5 1/4 | 4 7/16  | 5 7/8 |
|      | 1 3/4          |          |               |          |       |                      |     |        |       |       |            |       |         | 6 1/8 |
| 5.0  | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498                | 1/2 | 7/8    | 7/8   | 1 3/8 | 2 1/4      | 5 1/4 | 4 3/16  | 5 7/8 |
|      | 1 3/8          | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998                | 1/2 | 1 3/16 | 1     | 1 5/8 | 2 1/2      | 5 1/2 | 4 7/16  | 6 1/8 |
|      | 1 3/4          |          |               |          |       |                      |     |        |       |       |            |       |         | 6 3/8 |
| 6.0  | 1 3/8          | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998                | 5/8 | 1 3/16 | 1     | 1 5/8 | 2 5/8      | 5 7/8 | 4 15/16 | 6 5/8 |
|      | 1 3/4          | 1 1/2-12 | 1 1/4-12      | 1 3/4-12 | 2     | 2.373                | 5/8 | 1 1/2  | 1 1/8 | 1 7/8 | 2 7/8      | 6 1/8 | 5 3/16  | 6 7/8 |
|      | 2              |          |               |          |       |                      |     |        |       |       |            |       |         | 7     |

ST3T4 - Steel Mid Trunnion Mount

NFPA MT4

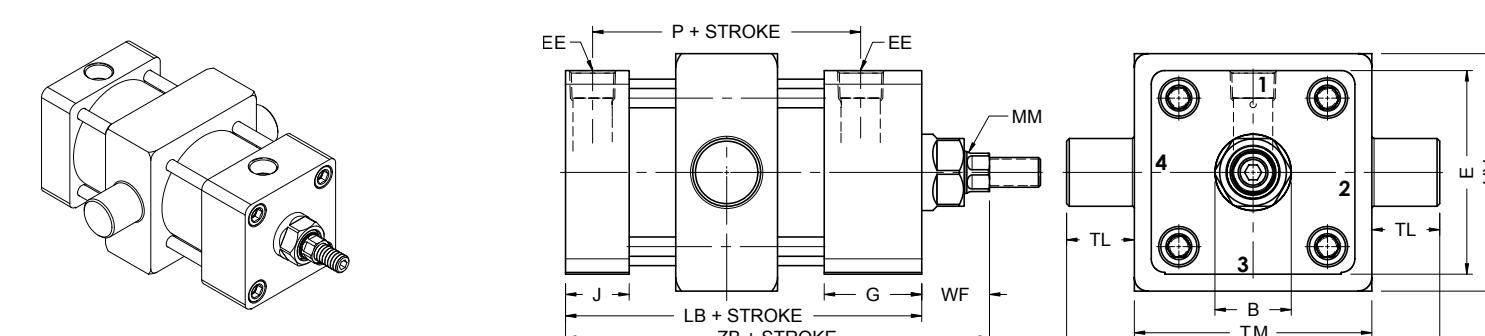

STARCYL CYLINDER CORP



20 Ron Joye Road, Hemingway  
South Carolina, 29554  
1-877-STARCYL (782-7295)  
www.Starcyl.com

STARCYL CANADA INC


2340 Michelin Street, Laval  
Quebec, Canada, H7L 5C3  
1-877-STARCYL (782-7295)  
www.Starcyl.ca

# STAR3 CYLINDERS


ST3S1 - Angle Mount  
NFPA MS1

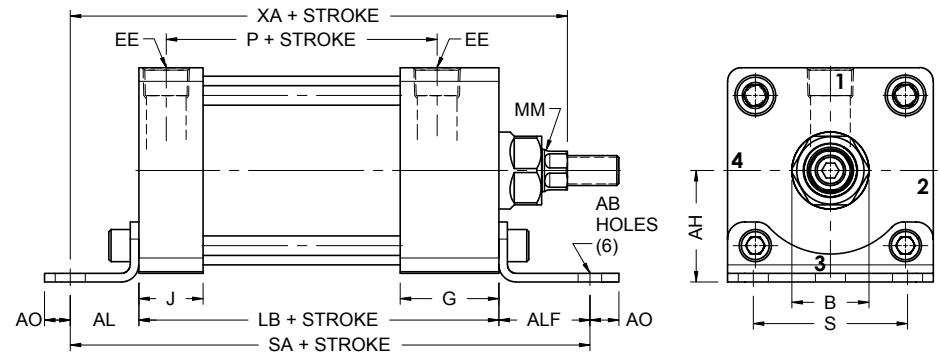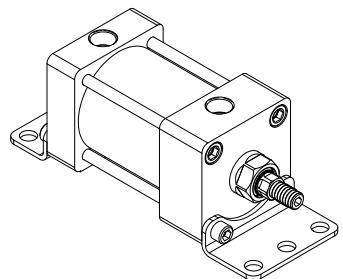



ST3S2 - Fixed Side Lug Mount  
NFPA MS2

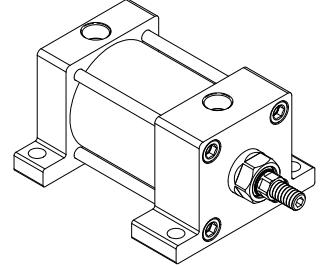



\*\*\* AVAILABLE FROM 1.5" TO 4" BORE ONLY  
SPECIAL MID SIDE LUG MOUNT(ASK FACTORY)

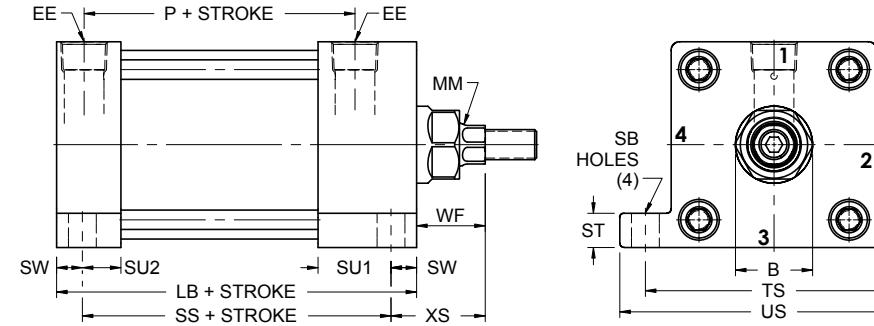

ST3....-FA-MS2 - Detachable Side Lug Mount  
NFPA MS2 (\*\*sold as mounting kit)




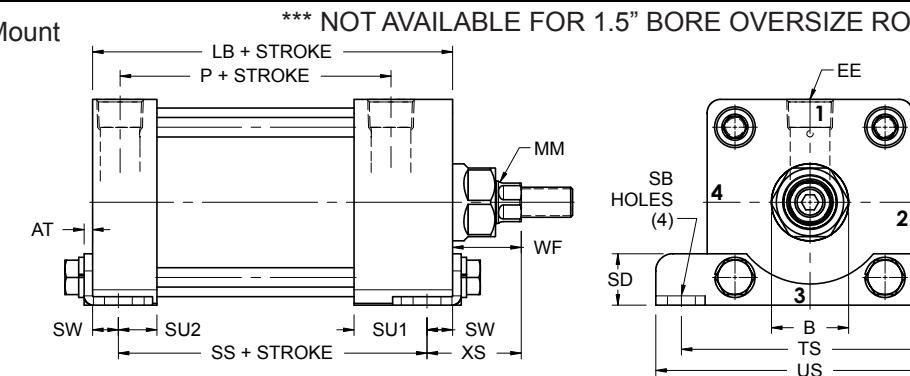
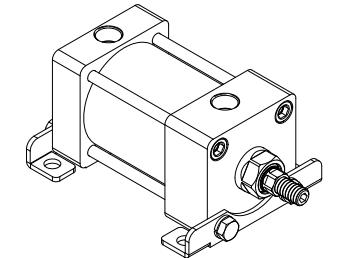


ST3S7 - End Lug Mount  
NFPA MS7

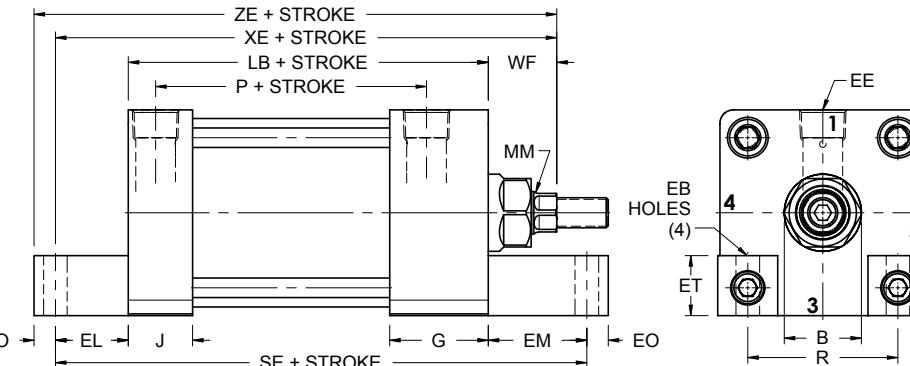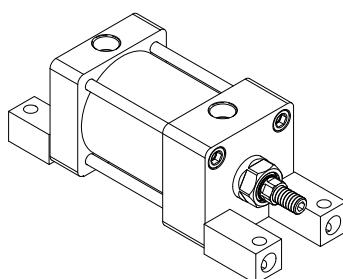

## ROD END STYLE

\* FOR 5/8 & 1" ROD, THE ROD END WILL BE STUDDED #2S STANDARD

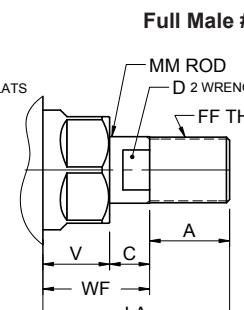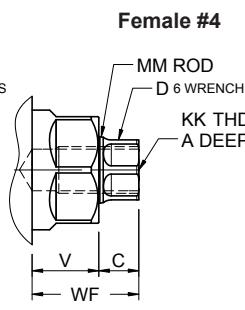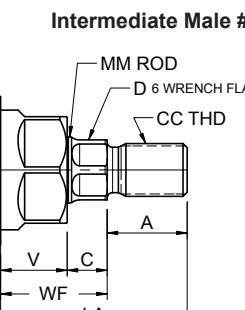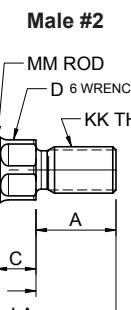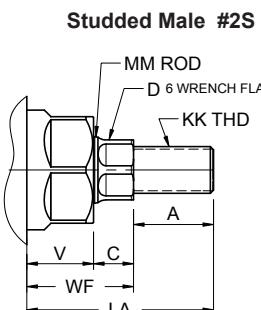

# STAR3 CYLINDERS

Table 1 - Envelope and Mounting Dimensions

| BORE | E     | E2<br>+/- .002 | EE<br>NPTF | G       | J      | K    | R    | SB    | ST   | SU   | SW    | TS    | US    | XV    | ADD STROKE |         |       |
|------|-------|----------------|------------|---------|--------|------|------|-------|------|------|-------|-------|-------|-------|------------|---------|-------|
|      |       |                |            |         |        |      |      |       |      |      |       |       |       |       | LB         | P       | SS    |
| 1.5  | 2     | 1.000          | 3/8        | 1 7/16  | 15/16  | 1/4  | 1.43 | 13/32 | 9/16 | 5/8  | 3/8   | 2 3/4 | 3 1/2 | 1/2   | 3 5/8      | 2 21/64 | 2 7/8 |
| 2.0  | 2 1/2 | 1.250          | 3/8        | 1 7/16  | 15/16  | 5/16 | 1.84 | 13/32 | 5/8  | 5/8  | 3/8   | 3 1/4 | 4     | 5/8   | 3 5/8      | 2 21/64 | 2 7/8 |
| 2.5  | 3     | 1.500          | 3/8        | 1 7/16  | 15/16  | 5/16 | 2.19 | 13/32 | 3/4  | 5/8  | 3/8   | 3 3/4 | 4 1/2 | 5/8   | 3 3/4      | 2 29/64 | 3     |
| 3.25 | 3 3/4 | 1.875          | 1/2        | 1 11/16 | 1 3/16 | 3/8  | 2.76 | 17/32 | 1    | 3/4  | 1/2   | 4 3/4 | 5 3/4 | 3/4   | 4 1/4      | 2 21/32 | 3 1/4 |
| 4.0  | 4 1/2 | 2.250          | 1/2        | 1 11/16 | 1 3/16 | 3/8  | 3.32 | 17/32 | 1    | 3/4  | 1/2   | 5 1/2 | 6 1/2 | 3/4   | 4 1/4      | 2 21/32 | 3 1/4 |
| 5.0  | 5 1/2 | 2.750          | 1/2        | 1 11/16 | 1 3/16 | 7/16 | 4.10 | 13/16 | 1    | 9/16 | 11/16 | 6 7/8 | 8 1/4 | 15/16 | 4 1/2      | 2 29/32 | 3 1/8 |
| 6.0  | 6 1/2 | 3.250          | 3/4        | 1 15/16 | 1 7/16 | 7/16 | 4.88 | 13/16 | 1    | 7/8  | 11/16 | 7 7/8 | 9 1/4 | 15/16 | 5          | 3 3/32  | 3 5/8 |

| BORE | EB    | EL     | EM      | EQ   | ET      | AB     | AH      | AL    | ALF   | AO  | AT    | S     | ADD STROKE |       |  |
|------|-------|--------|---------|------|---------|--------|---------|-------|-------|-----|-------|-------|------------|-------|--|
|      |       |        |         |      |         |        |         |       |       |     |       |       | SA         | SE    |  |
| 1.5  | 9/32  | 3/4    | 1 1/8   | 1/4  | 9/16    | 7/16   | 1 3/16  | 1     | 1 3/8 | 3/8 | 1/8   | 1 1/4 | 6          | 5 1/2 |  |
| 2.0  | 11/32 | 15/16  | 1 5/16  | 5/16 | 7/16    | 1 7/16 | 1       | 1 3/8 | 3/8   | 1/8 | 1 3/4 | 6     | 5 7/8      |       |  |
| 2.5  | 11/32 | 1 1/16 | 1 7/16  | 5/16 | 7/16    | 1 5/8  | 1       | 1 3/8 | 3/8   | 1/8 | 2 1/4 | 6 1/8 | 6 1/4      |       |  |
| 3.25 | 13/32 | 7/8    | 1 1/2   | 3/8  | 1       | 9/16   | 1 15/16 | 1 1/4 | 1 7/8 | 1/2 | 3/16  | 2 3/4 | 7 3/8      | 6 5/8 |  |
| 4.0  | 13/32 | 1      | 1 5/8   | 3/8  | 1 13/16 | 9/16   | 2 1/4   | 1 1/4 | 1 7/8 | 1/2 | 3/16  | 3 1/2 | 7 3/8      | 6 7/8 |  |
| 5.0  | 17/32 | 1 1/16 | 1 11/16 | 9/16 | 1 3/8   | 11/16  | 2 3/4   | 1 3/8 | 2     | 1/2 | 3/16  | 4 1/4 | 7 7/8      | 7 1/4 |  |
| 6.0  | 17/32 | 1      | 1 3/4   | 5/8  | 1 5/8   | 11/16  | 3 1/4   | 1 3/8 | 2 1/8 | 5/8 | 3/16  | 5 1/4 | 8 1/2      | 7 3/4 |  |

Table 2 - Rod Dimensions

| BORE | Rod Size<br>MM | #1<br>CC | #2 & #4<br>KK | #3<br>FF | A     | B<br>+/- .001 | C      | D     | V     | WF    | ADD STROKE |        |         |         |
|------|----------------|----------|---------------|----------|-------|---------------|--------|-------|-------|-------|------------|--------|---------|---------|
|      |                |          |               |          |       |               |        |       |       |       | XA         | XS     | XE      | ZE      |
| 1.5  | 5/8            | 1/2-20   | 7/16-20       | 5/8-18   | 3/4   | 1.123         | 3/8    | 1/2   | 5/8   | 1     | 5 5/8      | 1 3/8  | 5 3/8   | 5 5/8   |
|      | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2    | 7/8   | 7/8   | 1 3/8 | 6          | 1 3/4  | 5 3/4   | 6       |
| 2.0  | 5/8            | 1/2-20   | 7/16-20       | 5/8-18   | 3/4   | 1.123         | 3/8    | 1/2   | 5/8   | 1     | 5 5/8      | 1 3/8  | 5 9/16  | 5 7/8   |
|      | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2    | 7/8   | 7/8   | 1 3/8 | 6          | 1 3/4  | 5 15/16 | 6 1/4   |
| 2.5  | 5/8            | 1/2-20   | 7/16-20       | 5/8-18   | 3/4   | 1.123         | 3/8    | 1/2   | 5/8   | 1     | 5 5/8      | 1 3/8  | 5 13/16 | 6 1/8   |
|      | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2    | 7/8   | 7/8   | 1 3/8 | 6 1/8      | 1 3/4  | 6 3/16  | 6 1/2   |
| 3.25 | 1 1/4-12       | 1-14     | 1 3/8-12      | 1 5/8    | 1.998 | 5/8           | 1 3/16 | 1     | 1 5/8 | 6 1/4 | 2          | 6 3/16 | 6 1/2   | 6 1/2   |
|      | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2    | 7/8   | 7/8   | 1 3/8 | 6 7/8      | 1 7/8  | 6 1/2   | 6 7/8   |
| 4.0  | 1 1/4-12       | 1-14     | 1 3/8-12      | 1 5/8    | 1.998 | 5/8           | 1 3/16 | 1     | 1 5/8 | 7 1/8 | 2 1/8      | 6 7/8  | 7 1/4   | 7 1/4   |
|      | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2    | 7/8   | 7/8   | 1 3/8 | 7 1/4      | 2 1/16 | 6 15/16 | 7 7/16  |
| 5.0  | 1 1/4-12       | 1-14     | 1 3/8-12      | 1 5/8    | 1.998 | 1/2           | 1 3/16 | 1     | 1 5/8 | 7 1/2 | 2 5/16     | 7 3/16 | 7 11/16 | 7 11/16 |
|      | 1 1/2-12       | 1 1/4-12 | 1 3/4-12      | 2        | 2.373 | 5/8           | 1 1/2  | 1 1/8 | 1 7/8 | 7 3/8 | 2 3/8      | 7 1/8  | 7 15/16 | 7 1     |

# STAR3 CYLINDERS

## 7 TO 14" BORE SINGLE ROD Specifications

### Standard Specifications




#### NFPA interchangeable

Bore Size: 7", 8", 10", 12" & 14"  
 Stroke: Any Practical Stroke  
 Rod Material: 050 75KSI min Hard Chromed  
 Cushion: optional adjustable cushion at both ends  
 \*\* Not Applicable with Hydraulic Option \*\*  
 Operating Pressure: Air: 250 PSI - Oil: 400 PSI  
 Standard Temperature Range: From -40°F to +230°F  
 Tubing Material: Aluminum For 7" to 10"  
 Composite for 7" to 14" bore  
 Steel for 7" to 14" bore  
 Mounting Style: Optional Flush Mount available.  
 Single or Double rod end.







END MOUNT ME3 - ME4 - MX5

### ST3X5 Flush Cap Mount NFPA MX5

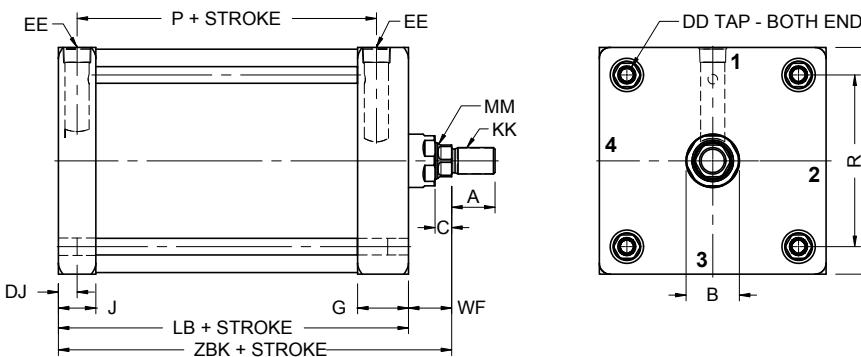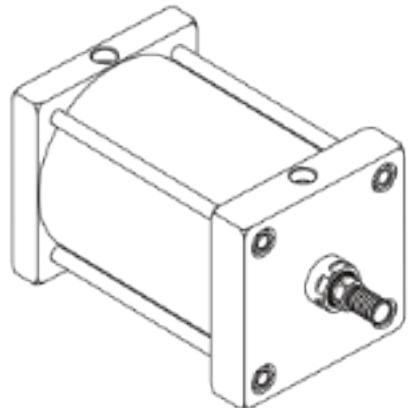

Front Sleeve Nut design and Dimensions

### ROD END STYLE

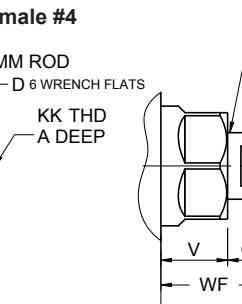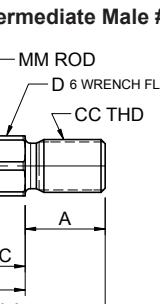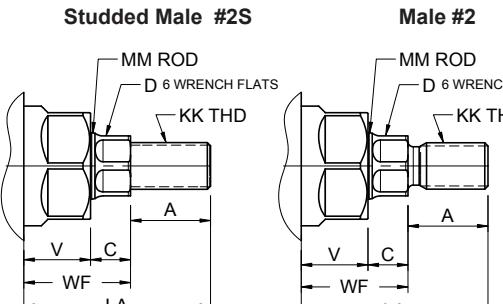




\* FOR 5/8 & 1" ROD, THE ROD END WILL BE STUDDED #2S STANDARD

### FEMALE #4

### Full Male #3

# STAR3 CYLINDERS

ST3E3 Square Head Mount  
NFPA ME3

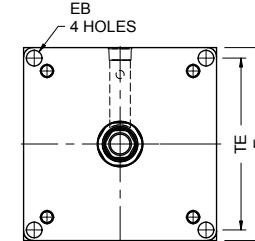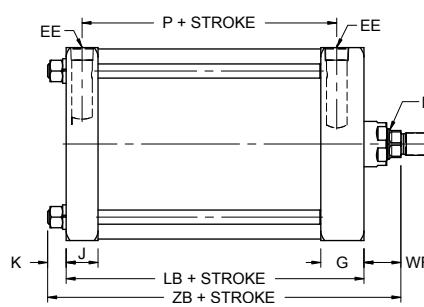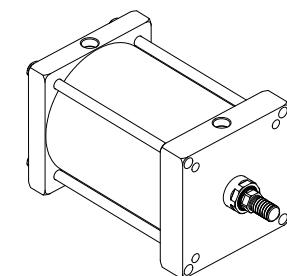

### ST3E4 Square Cap Mount NFPA ME4



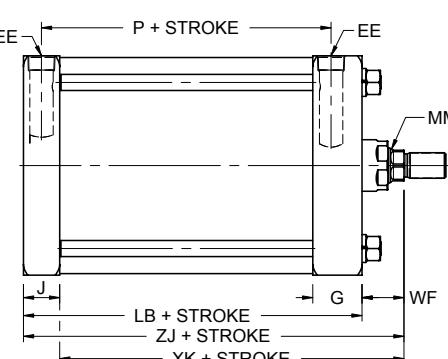


Table 1 - Envelope and Mounting Dimensions

| BORE | E     | EE<br>NPTF | G       | J       | K     | R     | EB    | DD     | DH<br>HEX | DT     | DJ     | TE    | ADD STROKE |        |
|------|-------|------------|---------|---------|-------|-------|-------|--------|-----------|--------|--------|-------|------------|--------|
|      |       |            |         |         |       |       |       |        |           |        |        |       | LB         | P      |
| 7.0  | 7.5   | 3/4        | 1 29/32 | 1 13/32 | 9/16  | 5.73  | 11/16 | 5/8-18 | 7/8       | 45/64  | 45/64  | 6.75  | 5 1/8      | 3 7/32 |
| 8.0  | 8.5   | 3/4        | 1 29/32 | 1 13/32 | 9/16  | 6.44  | 11/16 | 5/8-18 | 7/8       | 45/64  | 45/64  | 7.57  | 5 1/8      | 3 7/32 |
| 10   | 10.63 | 1          | 2 1/8   | 1 7/8   | 11/16 | 7.97  | 13/16 | 3/4-16 | 1 1/4     | 15/16  | 15/16  | 9.41  | 6 3/8      | 4 1/8  |
| 12   | 12.63 | 1 1/4      | 2 1/8   | 1 7/8   | 11/16 | 9.41  | 13/16 | 3/4-16 | 1 1/4     | 15/16  | 15/16  | 11.11 | 6 7/8      | 4 5/8  |
| 14   | 14.63 | 1 1/4      | 2 5/8   | 2 1/8   | 3/4   | 10.90 | 15/16 | 7/8-14 | 1 1/2     | 1 1/16 | 1 1/16 | 12.87 | 8 1/8      | 5 1/2  |

Table 2 - Rod Dimensions

| BORE  | Rod Size<br>MM | #1<br>CC | #2 & #4<br>KK | #3<br>FF | A     | B<br>+.001 | C   | D      | V     | WF    | ADD STROKE |         |        |        |
|-------|----------------|----------|---------------|----------|-------|------------|-----|--------|-------|-------|------------|---------|--------|--------|
|       |                |          |               |          |       |            |     |        |       |       | XK         | ZB      | ZBK    | ZJ     |
| 7.0   | 1 3/8          | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998      | 5/8 | 1 3/16 | 1     | 1 5/8 | 5 1/4      | 7 7/16  | 6 3/4  | 6 3/4  |
|       | 1 3/4          | 1 1/2-12 | 1 1/4-12      | 1 3/4-12 | 2     | 2.373      | 5/8 | 1 1/2  | 1 1/8 | 1 7/8 | 5 1/2      | 7 9/16  | 7      | 7      |
|       | 2              | 1 3/4-12 | 1 1/2-12      | 2-12     | 2 1/4 | 2.623      | 3/4 | 1 3/4  | 1 1/4 | 2     | 5 5/8      | 7 11/16 | 7 1/8  | 7 1/8  |
| 8.0   | 1 3/8          | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998      | 5/8 | 1 3/16 | 1     | 1 5/8 | 5 1/4      | 7 7/16  | 6 3/4  | 6 3/4  |
|       | 1 3/4          | 1 1/2-12 | 1 1/4-12      | 1 3/4-12 | 2     | 2.373      | 5/8 | 1 1/2  | 1 1/8 | 1 7/8 | 5 1/2      | 7 9/16  | 7      | 7      |
|       | 2              | 1 3/4-12 | 1 1/2-12      | 2-12     | 2 1/4 | 2.623      | 3/4 | 1 3/4  | 1 1/4 | 2     | 5 5/8      | 7 11/16 | 7 1/8  | 7 1/8  |
| 10.00 | 1 3/4          | 1 1/2-12 | 1 1/4-12      | 1 3/4-12 | 2     | 2.373      | 3/4 | 1 1/2  | 1 1/8 | 1 7/8 | 6 1/4      | 8 15/16 | 8 1/4  | 8 1/4  |
|       | 2              | 1 3/4-12 | 1 1/2-12      | 2-12     | 2 1/4 | 2.623      | 7/8 | 1 3/4  | 1 1/8 | 2     | 6 3/8      | 9 1/16  | 8 3/8  | 8 3/8  |
|       | 2              | 1 3/4-12 | 1 1/2-12      | 2-12     | 2 1/4 | 2.623      | 7/8 | 1 3/4  | 1 1/8 | 2     | 6 5/8      | 9 5/16  | 8 5/8  | 8 5/8  |
| 12.00 | 2              | 1 3/4-12 | 1 1/2-12      | 2-12     | 2 1/4 | 2.623      | 7/8 | 1 3/4  | 1 1/8 | 2     | 6 7/8      | 9 1/8   | 8 7/8  | 8 7/8  |
|       | 2 1/2          | 2 1/4-12 | 1 7/8-12      | 2 1/2-12 | 3     | 3.123      | 7/8 | 2 1/16 | 1 1/8 | 2 1/4 | 7 1/8      | 9 9/16  | 9 1/8  | 9 1/8  |
|       | 3              | 2 3/4-12 | 2 1/4-12      | 3-12     | 3 1/2 | 3.748      | 1   | 5 5/8  | 1 1/4 | 2 1/4 | 7 1/8      | 9 13/16 | 9 1/8  | 9 1/8  |
| 14.00 | 2 1/2          | 2 1/4-12 | 1 7/8-12      | 2 1/2-12 | 3     | 3.123      | 7/8 | 2 1/16 | 1 1/4 | 2 1/4 | 8 1/8      | 11 1/8  | 10 3/8 | 10 3/8 |
|       | 3              | 2 3/4-12 | 2 1/4-12      | 3-12     | 3 1/2 | 3.748      | 1   | 2 5/8  | 1 1/4 | 2 1/4 | 8 1/8      | 11 1/8  | 10 3/8 | 10 3/8 |
|       | 3 1/2          | 3 1/4-12 | 2 1/2-12      | 3 1/2-12 | 3 1/2 | 4.248      | 1   | 3      | 1 1/4 | 2 1/4 | 8 1/8      | 11 1/8  | 10 3/8 | 10 3/8 |

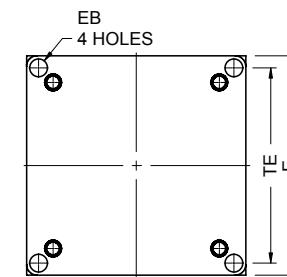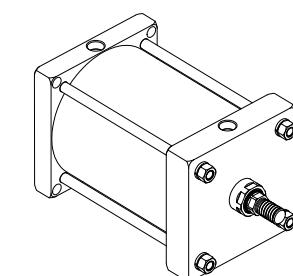

STARCYL CYLINDER CORP

20 Ron Joye Road, Hemingway  
 South Carolina, 29554  
 1-877-STARCYL (782-7295)  
[www.Starcyl.com](http://www.Starcyl.com)

STARCYL CANADA INC



2340 Michelin Street, Laval  
 Quebec, Canada, H7L 5C3  
 1-877-STARCYL (782-7295)  
[www.Starcyl.ca](http://www.Starcyl.ca)

# STAR3 CYLINDERS

## CENTER LINE MOUNT MX0 - MX1- MX2 - MX3



ST3X0 - No Mount

NFPA MX0

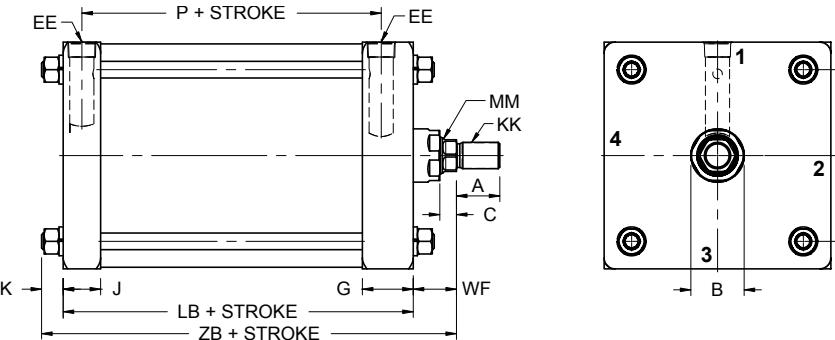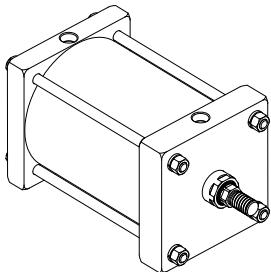



ST3X1 - Tie Rods Extended Both Ends

NFPA MX1

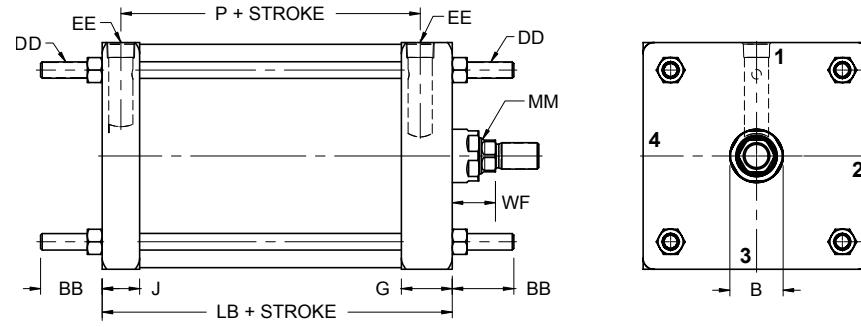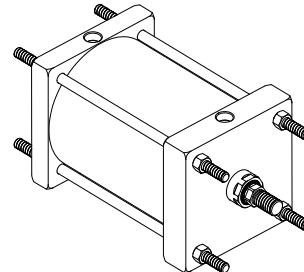



ST3X2 - Tie Rods Extended Cap Mount

NFPA MX2

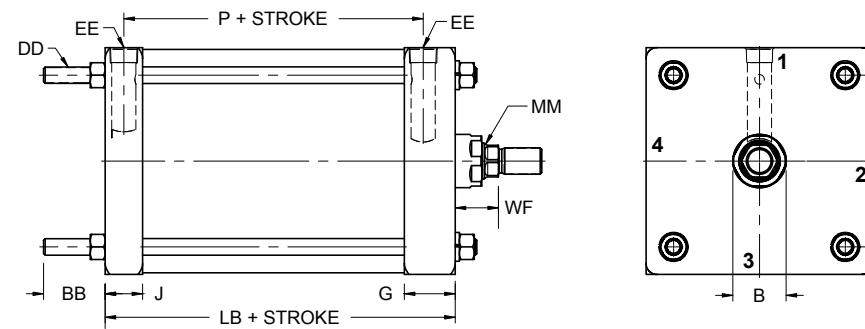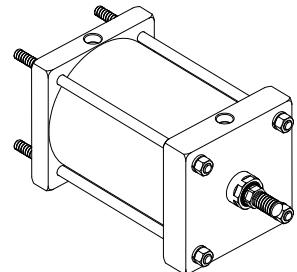

ST3X3 - Tie Rods Extended Head Mount


NFPA MX3

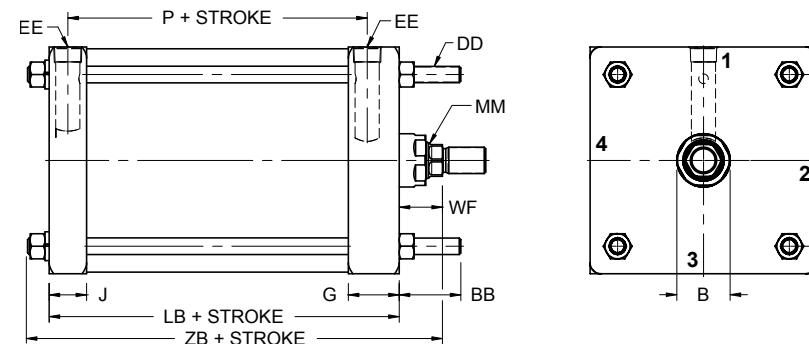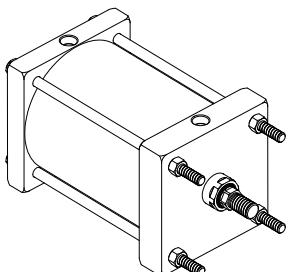


## ROD END STYLE

\* FOR 5/8 & 1" ROD, THE ROD END WILL BE STUDDED #2S STANDARD


Studded Male #2S

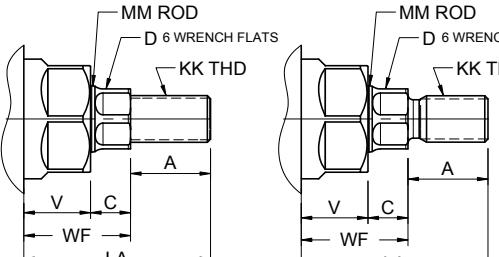


Male #2

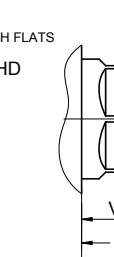


Intermediate Male #1

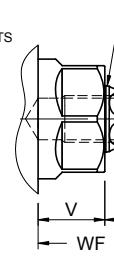

Female #4

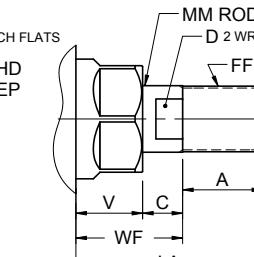

Full Male #3

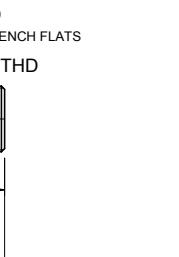

# STAR3 CYLINDERS

## Table 1 - Envelope and Mounting Dimensions

| BORE | BB     | DD     | E     | EE<br>NPTF | G       | J       | K     | R     | LB    | P      |
|------|--------|--------|-------|------------|---------|---------|-------|-------|-------|--------|
| 7    | 2 5/16 | 5/8-18 | 7.5   | 3/4        | 1 29/32 | 1 13/32 | 9/16  | 5.73  | 5 1/8 | 3 7/32 |
| 8    | 2 5/16 | 5/8-18 | 8.5   | 3/4        | 1 29/32 | 1 13/32 | 9/16  | 6.44  | 5 1/8 | 3 7/32 |
| 10   | 2 9/16 | 3/4-16 | 10.63 | 1          | 2 1/8   | 1 7/8   | 11/16 | 7.97  | 6 3/8 | 4 1/8  |
| 12   | 2 9/16 | 3/4-16 | 12.63 | 1 1/4      | 2 1/8   | 1 7/8   | 11/16 | 9.41  | 6 7/8 | 4 5/8  |
| 14   | 3 3/16 | 7/8-14 | 14.63 | 1 1/4      | 2 5/8   | 2 1/8   | 3/4   | 10.90 | 8 1/8 | 5 1/2  |

## Table 2 - Rod Dimensions

| BORE  | Rod Size MM | #1 CC    | #2 & #4 KK | #3 FF    | A     | B +/- .001 | C     | D      | V     | WF    | Add Stroke ZB |
|-------|-------------|----------|------------|----------|-------|------------|-------|--------|-------|-------|---------------|
| 7.0   | 1 3/8       | 1 1/4-12 | 1-14       | 1 3/8-12 | 1 5/8 | 1.998      | 5/8   | 1 3/16 | 1     | 1 5/8 | 7 7/16        |
|       | 1 3/4       | 1 1/2-12 | 1 1/4-12   | 1 3/4-12 | 2     | 2.373      | 5/8   | 1 1/2  | 1 1/8 | 1 7/8 | 7 9/16        |
|       | 2           | 2        | 1 3/4-12   | 1 1/2-12 | 2-12  | 2 1/4      | 2.623 | 3/4    | 1 3/4 | 1 1/4 | 7 11/16       |
| 8.0   | 1 3/8       | 1 1/4-12 | 1-14       | 1 3/8-12 | 1 5/8 | 1.998      | 5/8   | 1 3/16 | 1     | 1 5/8 | 7 7/16        |
|       | 1 3/4       | 1 1/2-12 | 1 1/4-12   | 1 3/4-12 | 2     | 2.373      | 5/8   | 1 1/2  | 1 1/8 | 1 7/8 | 7 9/16        |
|       | 2           | 2        | 1 3/4-12   | 1 1/2-12 | 2-12  | 2 1/4      | 2.623 | 3/4    | 1 3/4 | 1 1/4 | 7 11/16       |
| 10.00 | 1 3/4       | 1 1/2-12 | 1 1/4-12   | 1 3/4-12 | 2     | 2.373      | 3/4   | 1 1/2  | 1 1/8 | 1 7/8 | 8 15/16       |
|       | 2           | 1 3/4-12 | 1 1/2-12   | 2-12     | 2 1/4 | 2.623      | 3/4   | 1 3/4  | 1 1/4 | 2     | 9 5/16        |
|       | 2           | 1 3/4-12 | 1 1/2-12   | 2-12     | 2 1/4 | 2.623      | 7/8   | 1 3/4  | 1 1/8 | 2     | 9 1/8         |
| 12.00 | 2 1/2       | 2 1/4-12 | 1 7/8-12   | 2 1/2-12 | 3     | 3.123      | 7/8   | 2 1/16 | 1 1/8 | 2 1/4 | 9 9/16        |
|       | 3           | 2 3/4-12 | 2 1/4-12   | 3-12     | 3 1/2 | 3.748      | 1     | 5 5/8  | 1 1/4 | 2 1/4 | 9 13/16       |
|       | 3 1/2       | 3 1/4-12 | 2 1/2-12   | 3 1/2-12 | 3 1/2 | 4.248      | 1     | 2 5/8  | 1 1/4 | 2 1/4 | 11 1/8        |
| 14.00 | 2 1/2       | 2 1/4-12 | 1 7/8-12   | 2 1/2-12 | 3     | 3.123      | 7/8   | 2 1/16 | 1 1/4 | 2 1/4 | 11 1/8        |
|       | 3           | 2 3/4-12 | 2 1/4-12   | 3-12     | 3 1/2 | 3.748      | 1     | 2 5/8  | 1 1/4 | 2 1/4 | 11 1/8        |
|       | 3 1/2       | 3 1/4-12 | 2 1/2-12   | 3 1/2-12 | 3 1/2 | 4.248      | 1     | 3      | 1 1/4 | 2 1/4 | 11 1/8        |



STARCYL CYLINDER CORP

20 Ron Joye Road, Hemingway  
South Carolina, 29554  
1-877-STARCYL (782-7295)  
[www.Starcyl.com](http://www.Starcyl.com)

STARCYL CANADA INC

2340 Michelin Street, Laval  
Quebec, Canada, H7L 5C3  
1-877-STARCYL (782-7295)  
[www.Starcyl.ca](http://www.Starcyl.ca)



# STAR3 CYLINDERS

7 TO 14" BORE


ST3P1 - Aluminum Extrusion Fixed Clevis

NFPA MP1



8" bore Style

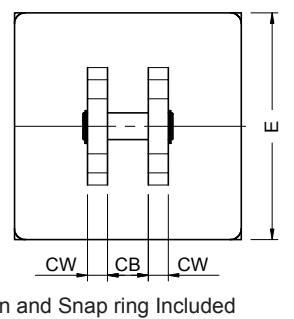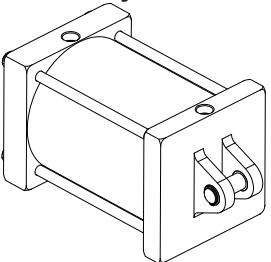


Pin and Snap ring Included

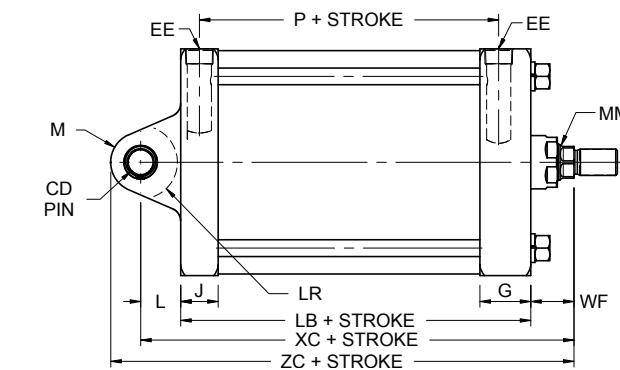



7" bore Style

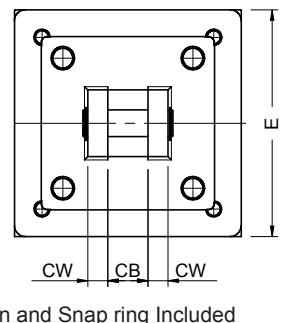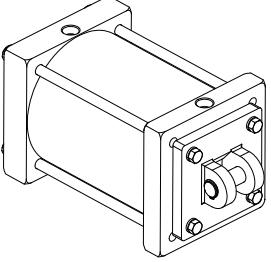


Pin and Snap ring Included

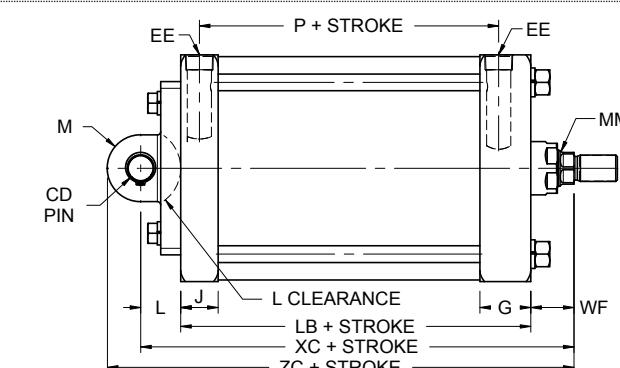

10" to 14"bore Style

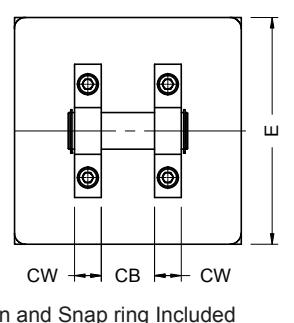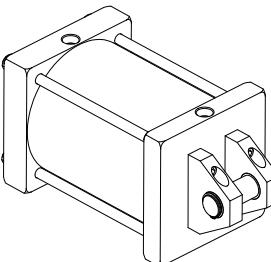



Pin and Snap ring Included

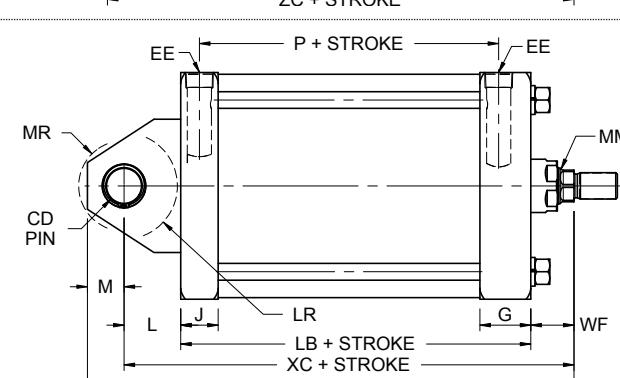


ST3P2 - Steel Detachable Clevis

NFPA MP2

7 & 8" bore Style

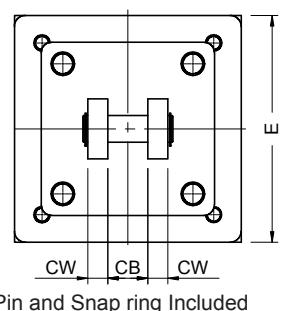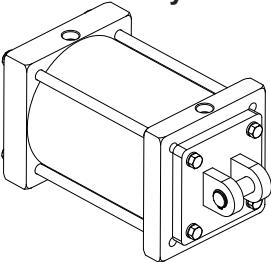


Pin and Snap ring Included

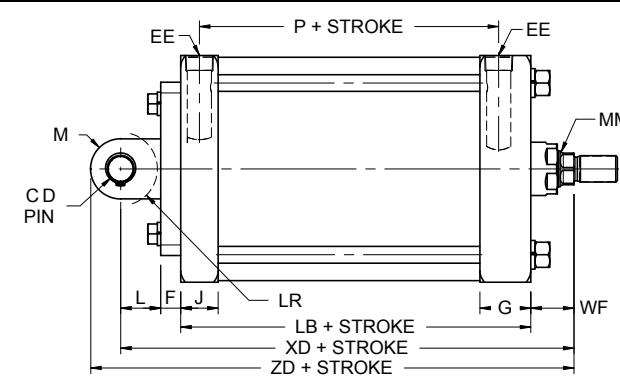


## ROD END STYLE


Studded Male #2S

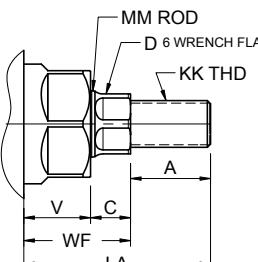


Male #2

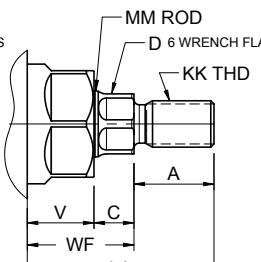


Intermediate Male #1

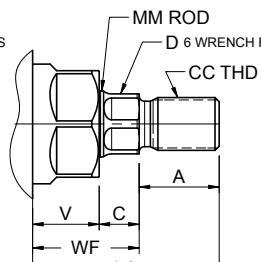

Female #4

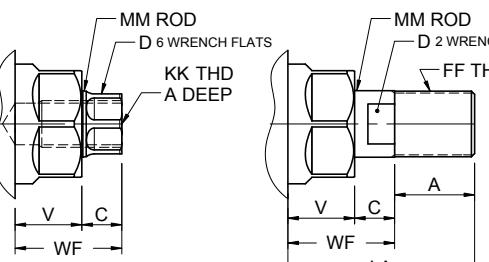

Full Male #3

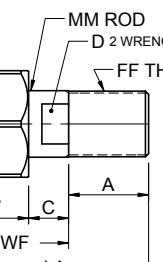

\* FOR 5/8 & 1" ROD, THE ROD END WILL BE STUDDED #2S STANDARD

# STAR3 CYLINDERS

Table 1 - Envelope and Mounting Dimensions

| BORE | E     | EE<br>NPTF | F   | FT  | G       | J       | K     | R    | CB    | CD<br>+.000<br>-.002 | CW    | FL    | L     | LR    | M     | MR     | Add Stroke<br>LB P |
|------|-------|------------|-----|-----|---------|---------|-------|------|-------|----------------------|-------|-------|-------|-------|-------|--------|--------------------|
| 7.0  | 7.5   | 3/4        | 3/4 | 3/4 | 1 29/32 | 1 13/32 | 9/16  | 5.73 | 1 1/2 | 1                    | 3/4   | 2 1/4 | 1 1/2 | 1 1/4 | 1     | 1 3/16 | 5 1/8 3 7/32       |
| 8.0  | 8.5   | 3/4        | 3/4 | 3/4 | 1 29/32 | 1 13/32 | 9/16  | 6.44 | 1 1/2 | 1                    | 3/4   | 2 1/4 | 1 1/2 | 1 1/4 | 1     | 1 3/16 | 5 1/8 3 7/32       |
| 10   | 10.63 | 1          | 3/4 | 1   | 2 1/8   | 1 7/8   | 11/16 | 7.97 | 2     | 1 3/8                | 1     | 3 1/8 | 2 1/8 | 1 7/8 | 1 3/8 | 1 5/8  | 6 3/8 4 1/8        |
| 12   | 12.75 | 1-1/4      | 3/4 | 1   | 2 1/8   | 1 7/8   | 11/16 | 9.41 | 2 1/2 | 1 3/4                | 1 1/4 | 3 1/4 | 2 1/4 | 2 1/8 | 1 3/4 | 2 1/8  | 7 7/8 4 5/8        |
| 14   | 14.75 | 1-1/4      | 3/4 | 1   | 2 5/8   | 2 1/8   | 3/4   | 10.9 | 2 1/2 | 2                    | 1 1/4 | 3 1/2 | 2 1/2 | 2 3/8 | 2     | 2 3/8  | 8 1/8 5 1/2        |



Table 2 - Rod Dimensions

| BORE  | Rod<br>Size<br>MM | #1<br>CC | #2 & #4<br>KK | #3<br>FF | A     | B<br>+.001 | C   | D       | V     | ADD STROKE |        |        |        |        |
|-------|-------------------|----------|---------------|----------|-------|------------|-----|---------|-------|------------|--------|--------|--------|--------|
|       |                   |          |               |          |       |            |     |         |       | XC         | XD     | ZC     | ZD     |        |
| 7.0   | 1 3/8             | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998      | 5/8 | 1 3/16  | 1     | 1 5/8      | 8 1/4  | 9      | 9 1/4  | 10 1/4 |
|       | 1 3/4             | 1 1/2-12 | 1 1/4-12      | 1 3/4-12 | 2     | 2.373      | 5/8 | 1 1/2   | 1 1/8 | 1 7/8      | 8 1/2  | 9 1/4  | 9 1/2  | 10 1/2 |
|       | 2                 | 1 3/4-12 | 1 1/4-12      | 2-12     | 2 1/4 | 2.623      | 7/8 | 1 11/16 | 1 1/8 | 2          | 8 5/8  | 9 3/8  | 9 5/8  | 10 5/8 |
| 8.0   | 1 3/8             | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998      | 5/8 | 1 3/16  | 1     | 1 5/8      | 8 1/4  | 9      | 9 1/4  | 10 1/4 |
|       | 1 3/4             | 1 1/2-12 | 1 1/4-12      | 1 3/4-12 | 2     | 2.373      | 5/8 | 1 1/2   | 1 1/8 | 1 7/8      | 8 1/2  | 9 1/4  | 9 1/2  | 10 1/2 |
|       | 2                 | 1 3/4-12 | 1 1/4-12      | 2-12     | 2 1/4 | 2.623      | 7/8 | 1 11/16 | 1 1/8 | 2          | 8 5/8  | 9 3/8  | 9 5/8  | 10 5/8 |
| 10.00 | 1 3/4             | 1 1/2-12 | 1 1/4-12      | 1 3/4-12 | 2     | 2.373      | 3/4 | 1 1/2   | 1 1/8 | 1 7/8      | 10 3/8 | 11 3/8 | 11 3/8 | 11 3/8 |
|       | 2                 | 1 3/4-12 | 1 1/2-12      | 2-12     | 2 1/4 | 2.623      | 3/4 | 1 3/4   | 1 1/8 | 1 7/8      | 10 1/2 | 11 1/2 | 11 7/8 | 11 1/2 |
|       | 2 1/2             | 2 1/4-12 | 1 7/8-12      | 2 1/2-12 | 3     | 3.123      | 1   | 2 1/16  | 1 1/4 | 2 1/4      | 10 3/4 | 11 3/4 | 12 1/8 | 11 3/4 |
| 12.00 | 2                 | 1 3/4-12 | 1 1/2-12      | 2-12     | 2 1/4 | 2.623      | 7/8 | 2 1/16  | 1 1/8 | 2          | 11 1/8 | 12 1/8 | 12 7/8 | 12 1/8 |
|       | 2 1/2             | 2 1/4-12 | 1 7/8-12      | 2 1/2-12 | 3     | 3.123      | 7/8 | 2 1/16  | 1 1/8 | 2          | 11 3/8 | 12 1/8 | 13 1/8 | 12 3/8 |
|       | 3                 | 2 3/4-12 | 2 1/4-12      | 3-12     | 3 1/2 | 3.748      | 1   | 2 5/8   | 1 1/4 | 2 1/4      | 11 3/8 | 12 1/8 | 13 1/8 | 12 3/8 |
| 14.00 | 2 1/2             | 2 1/4-12 | 1 7/8-12      | 2 1/2-12 | 3     | 3.123      | 1   | 2 1/16  | 1 1/4 | 2 1/4      | 12 7/8 | 13 7/8 | 14 7/8 | 13 7/8 |
|       | 3                 | 2 3/4-12 | 2 1/4-12      | 3-12     | 3 1/2 | 3.748      | 1   | 2 5/8   | 1 1/4 | 2 1/4      | 12 7/8 | 13 7/8 | 14 7/8 | 13 7/8 |
|       | 3 1/2             | 3 1/4-12 | 2 1/2-12      | 3 1/2-12 | 3 1/2 | 4.248      | 1   | 3       | 1 1/4 | 2 1/4      | 12 7/8 | 13 7/8 | 14 7/8 | 13 7/8 |


ST3P2 - Steel Detachable Clevis

NFPA MP2

10" to 14"bore Style

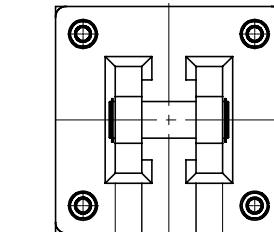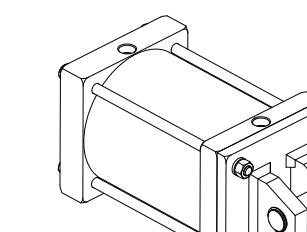


Detachable Clevis in Welded Steel

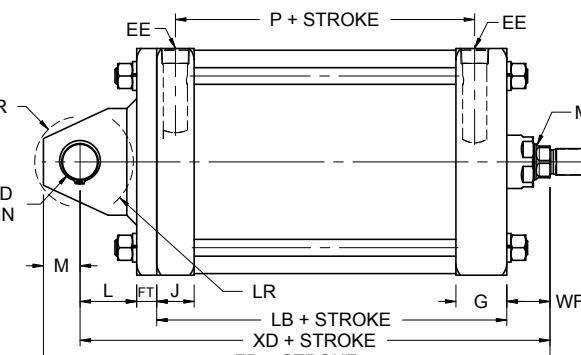


## ROD END STYLE


Studded Male #2S

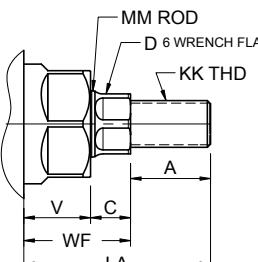


Male #2

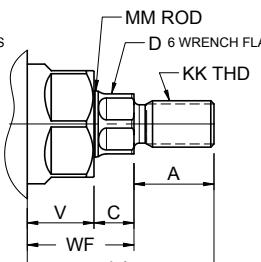


Intermediate Male #1

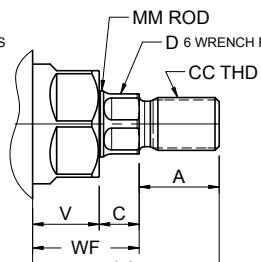

Female #4

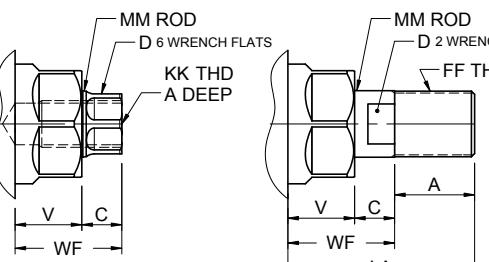

Full Male #3

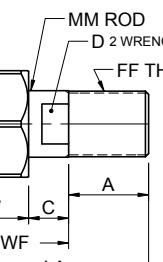

\* FOR 5/8 & 1" ROD, THE ROD END WILL BE STUDDED #2S STANDARD



STARCYL CYLINDER CORP

20 Ron Joye Road, Hemingway  
South Carolina, 29554  
1-877-STARCYL (782-7295)  
www.Starcyl.com

STARCYL CANADA INC



2340 Michelin Street, Laval  
Quebec, Canada, H7L 5C3  
1-877-STARCYL (782-7295)  
www.Starcyl.ca

# STAR3 CYLINDERS

7 TO 14" BORE



ST3T1 - Detachable Head Trunnion Mount

NFPA MT1

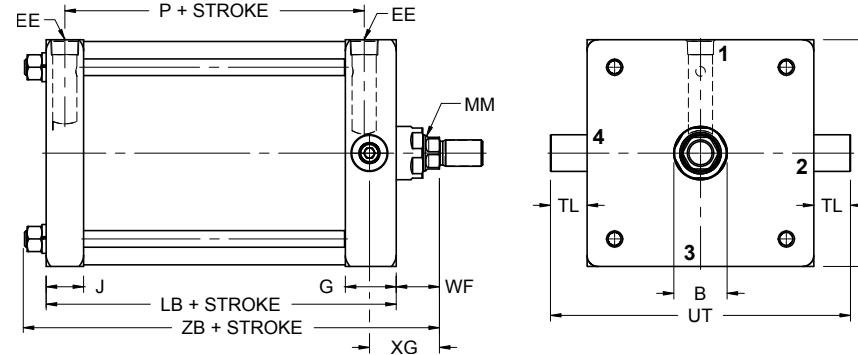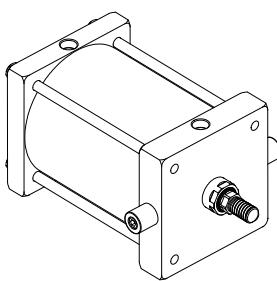


ST3T2 - Detachable Cap Trunnion Mount

NFPA MT2

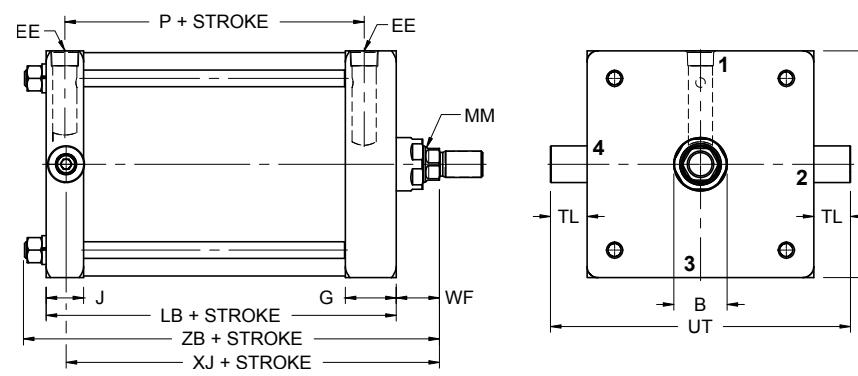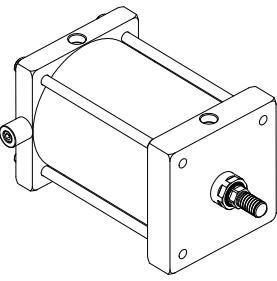

ST3T4 - Intermediate Mid Trunnion Mount






NFPA MT4

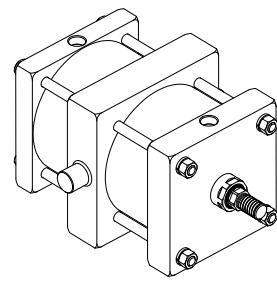

CUSTOMER MUST SPECIFY XI - SEE TABLE 3 FOR MIN XI DIMENSION

## ROD END STYLE

\* FOR 5/8 & 1" ROD, THE ROD END WILL BE STUDDED #2S STANDARD

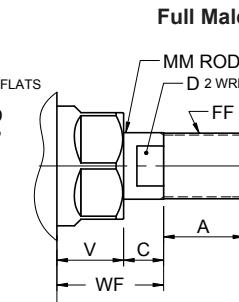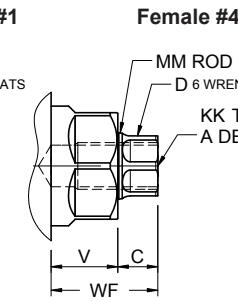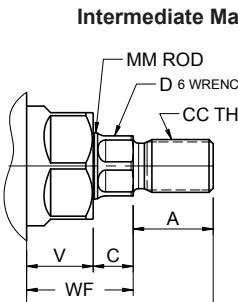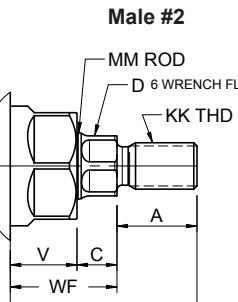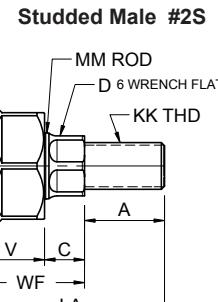

# STAR3 CYLINDERS

Table 1 - Envelope and Mounting Dimensions

| BORE | E     | EE<br>NPTF | G       | J       | K     | R    | TD<br>+.000<br>-.001 | TL    | TM    | UM     | UT     | UV     | Add Stroke |        |                     |   |
|------|-------|------------|---------|---------|-------|------|----------------------|-------|-------|--------|--------|--------|------------|--------|---------------------|---|
|      |       |            |         |         |       |      |                      |       |       |        |        |        | LB         | P      | MT4<br>(min stroke) |   |
| 7.0  | 7.5   | 3/4        | 1 29/32 | 1 13/32 | 9/16  | 5.73 | 1.375                | 1 3/8 | 8 3/4 | 11 1/2 | 10 1/4 | 8 1/2  | 5 1/8      | 3 7/32 | 1                   |   |
| 8.0  | 8.5   | 3/4        | 1 29/32 | 1 13/32 | 9/16  | 6.44 | 1.375                | 1 3/8 | 9 3/4 | 12 1/8 | 11 1/4 | 9 1/2  | 5 1/8      | 3 7/32 | 1                   |   |
| 10   | 10.63 | 1          | 2 1/8   | 1 7/8   | 11/16 | 7.97 | 1.750                | 1 3/4 |       | 12     | 15 1/2 | 14 1/8 | 11 3/4     | 6 3/8  | 4 1/8               | 1 |
| 12   | 12.75 | 1-1/4      | 2 1/8   | 1 7/8   | 11/16 | 9.41 | 1.750                | 1 3/4 |       | 14     | 1 1/2  | 16 1/4 | 13 3/4     | 7 7/8  | 4 5/8               | 1 |
| 14   | 14.75 | 1-1/4      | 2 3/8   | 2 1/8   | 3/4   | 10.9 | 2.000                |       | 2     | 16 1/4 | 20 1/4 | 18 3/4 | 16         | 8 1/8  | 5 1/2               | 1 |

Table 2 - Rod Dimensions

| BORE  | Rod<br>Size<br>MM | #1<br>CC   | #2 & #4<br>KK | #3<br>FF | A     | B<br>+/- .001 | C   | D       | V     | WF    | Add Stroke |       |         |
|-------|-------------------|------------|---------------|----------|-------|---------------|-----|---------|-------|-------|------------|-------|---------|
|       |                   |            |               |          |       |               |     |         |       |       | XJ         | XG    | ZB      |
| 7.0   | 1 3/8             | 1 1/4-12   | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 5/8 | 1 3/16  | 1     | 1 5/8 | 8 1/4      | 2 5/8 | 7 7/16  |
|       | 1 3/4             | 1 1/2-12   | 1 1/4-12      | 1 3/4-12 | 2     | 2.373         | 5/8 | 1 1/2   | 1 1/8 | 1 7/8 | 8 1/2      | 2 7/8 | 7 9/16  |
|       | 2                 | 1 3/4-12   | 1 1/4-12      | 2-12     | 2 1/4 | 2.623         | 7/8 | 1 11/16 | 1 1/8 | 2     | 8 5/8      | 3     | 7 11/16 |
| 8.0   | 1 3/8             | 1 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 5/8 | 1 3/16  | 1     | 1 5/8 | 8 1/4      | 2 5/8 | 7 7/16  |
|       | 1 3/4             | 1 1 1/2-12 | 1 1/4-12      | 1 3/4-12 | 2     | 2.373         | 5/8 | 1 1/2   | 1 1/8 | 1 7/8 | 8 1/2      | 2 7/8 | 7 9/16  |
|       | 2                 | 1 3/4-12   | 1 1/4-12      | 2-12     | 2 1/4 | 2.623         | 7/8 | 1 11/16 | 1 1/8 | 2     | 8 5/8      | 3     | 7 11/16 |
| 10.00 | 1 3/4             | 1 1 1/2-12 | 1 1/4-12      | 1 3/4-12 | 2     | 2.373         | 3/4 | 1 1/2   | 1 1/8 | 1 7/8 | 10 3/8     | 3     | 8 15/16 |
|       | 2                 | 1 3/4-12   | 1 1 1/2-12    | 2-12     | 2 1/4 | 2.623         | 3/4 | 1 3/4   | 1 1/8 | 1 7/8 | 10 1/2     | 3 1/8 | 9 1/16  |
|       | 2 1/2             | 2 1 1/4-12 | 1 7/8-12      | 2 1/2-12 | 3     | 3.123         | 1   | 2 1/16  | 1 1/4 | 2 1/4 | 10 3/4     | 3 3/8 | 9 5/16  |
| 12.00 | 2                 | 1 3/4-12   | 1 1/2-12      | 2-12     | 2 1/4 | 2.623         | 7/8 | 1 3/4   | 1 1/8 | 2     | 11 1/8     | 3 1/8 | 9 1/8   |
|       | 2 1/2             | 2 1 1/4-12 | 1 7/8-12      | 2 1/2-12 | 3     | 3.123         | 7/8 | 2 1/16  | 1 1/8 | 2     | 11 3/8     | 3 3/8 | 9 9/16  |
|       | 3                 | 2 3/4-12   | 2 1/4-12      | 3-12     | 3 1/2 | 3.748         | 1   | 2 5/8   | 1 1/4 | 2 1/4 | 11 3/8     | 3 3/8 | 9 13/16 |
| 14.00 | 2 1/2             | 2 1 1/4-12 | 1 7/8-12      | 2 1/2-12 | 3     | 3.123         | 1   | 2 1/16  | 1 1/4 | 2 1/4 | 12 7/8     | 3 5/8 | 11 1/8  |
|       | 3                 | 2 3/4-12   | 2 1/4-12      | 3-12     | 3 1/2 | 3.748         | 1   | 2 5/8   | 1 1/4 | 2 1/4 | 12 7/8     | 3 5/8 | 11 1/8  |
|       | 3 1/2             | 3 1 1/4-12 | 2 1/2-12      | 3 1/2-12 | 3 1/2 | 4.248         | 1   | 3       | 1 1/4 | 2 1/4 | 12 7/8     | 3 5/8 | 11 1/8  |

Table 3 - MT4 Mid Trunnion Limitations

| BORE  | Rod Size<br>MM | Min<br>Xi | Minimum<br>Stroke |
|-------|----------------|-----------|-------------------|
| 7.0   | 1 3/8          | 4 15/16   | 1 1/4             |
|       | 1 3/4          | 5 3/16    | 1 1/4             |
|       | 2              | 5 7/16    | 1 1/4             |
| 8.0   | 1 3/8          | 4 15/16   | 1 1/4             |
|       | 1 3/4          | 5 3/16    | 1 1/4             |
|       | 2              | 5 7/16    | 1 1/4             |
| 10.00 | 1 3/4          | 5 13/16   | 3/8               |
|       | 2              | 5 15/16   | 3/8               |
|       | 2 1/2          | 6 3/16    | 3/8               |
| 12.00 | 2              | 6 7/16    | 3/4               |
|       | 2 1/2          | 6 11/16   | 3/4               |
|       | 3              | 6 11/16   | 3/4               |
| 14.00 | 2 1/2          | 7 7/16    | 3/4               |
|       | 3              | 7 7/16    | 3/4               |
|       | 3 1/2          | 7 7/16    | 3/4               |



STARCYL CYLINDER CORP

20 Ron Joye Road, Hemingway  
South Carolina, 29554  
1-877-STARCYL (782-7295)  
www.Starcyl.com



STARCYL CANADA INC

2340 Michelin Street, Laval  
Quebec, Canada, H7L 5C3  
1-877-STARCYL (782-7295)  
www.Starcyl.ca

# STAR3 CYLINDERS



ST3S1 - Detachable Angle Mount

NFPA MS1

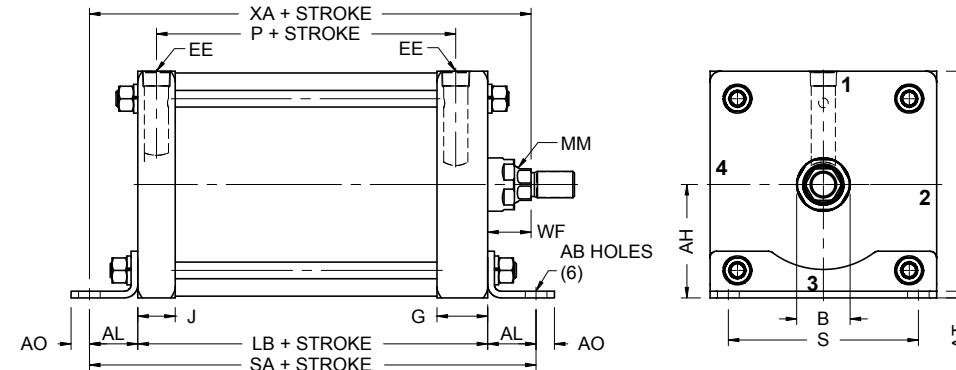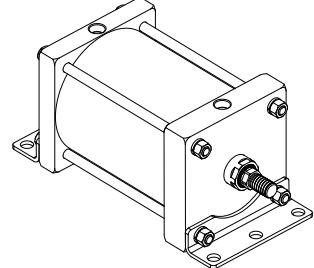

ST3S4 Side Tapped Mount



NFPA MS4

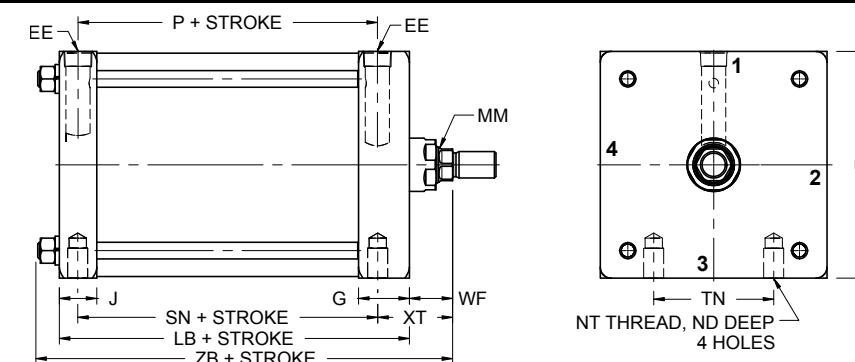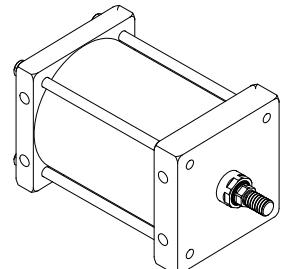

ST3X0....FA-MS2 - Detachable Side Lug Mount

NFPA MS2 compatible



10" to 14" bore

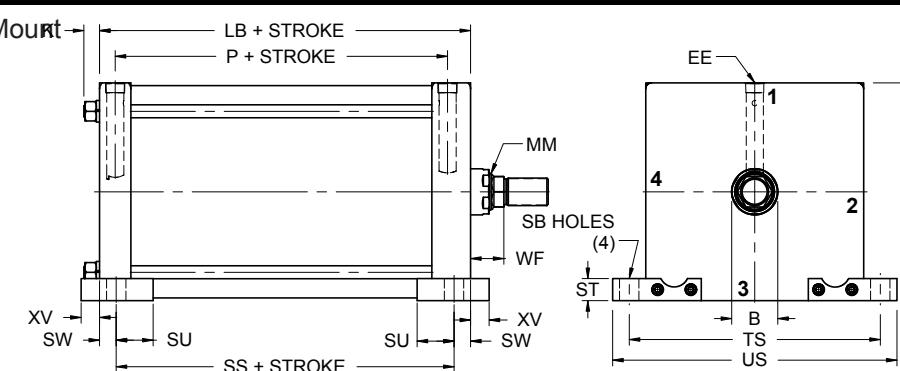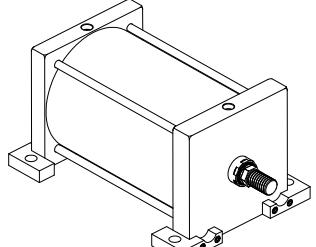

ST3X0....FA-MS2 - Detachable Side Lug Mount

NFPA MS2 compatible


8" bore Only

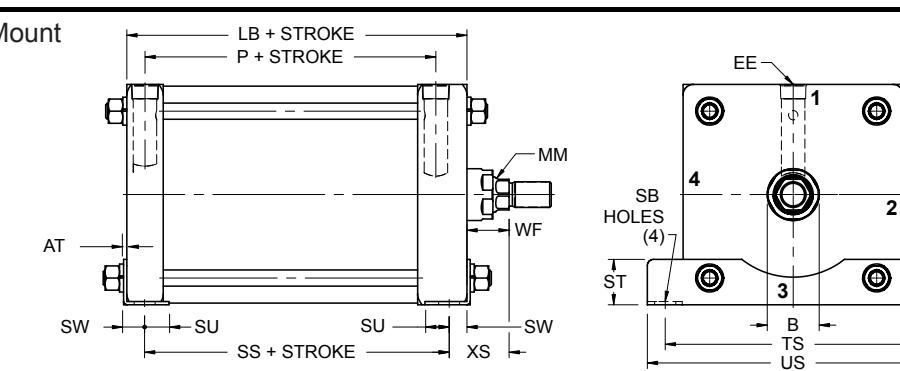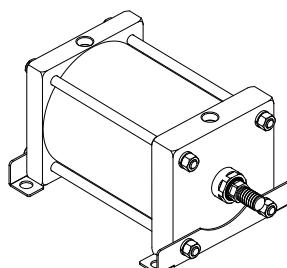


## ROD END STYLE

\* FOR 5/8 & 1" ROD, THE ROD END WILL BE STUDDED #2S STANDARD


Studded Male #2S

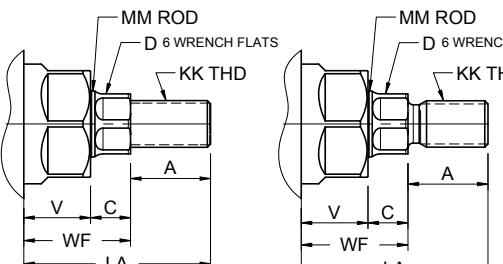


Male #2

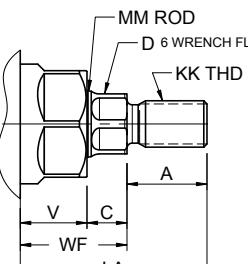


Intermediate Male #1

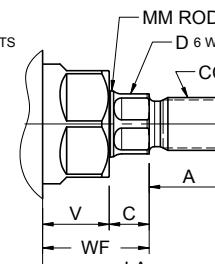

Female #4

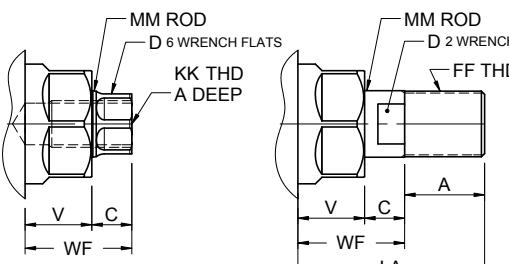

Full Male #3

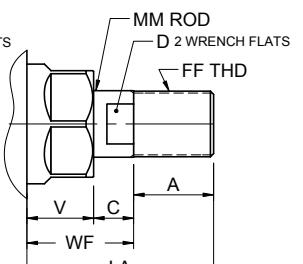

## FOOT MOUNT MS1 - MS2 - MS4

# STAR3 CYLINDERS

7 TO 14" BORE

Table 1 - Envelope and Mounting Dimensions

| BORE | E     | EE<br>NPTF | G       | J       | K     | R    | SB*    | ST    | SU    | SW    | TS    | US     | XV     | ADD STROKE |        |       |       |
|------|-------|------------|---------|---------|-------|------|--------|-------|-------|-------|-------|--------|--------|------------|--------|-------|-------|
|      |       |            |         |         |       |      |        |       |       |       |       |        |        | LB         | P      | SS    |       |
| 7.0  | 7.5   | 3/4        | 1 29/32 | 1 13/32 | 9/16  | 5.73 | AF     | AF    | AF    | AF    | AF    | AF     | AF     | 5 1/8      | 3 7/32 | AF4   |       |
| 8.0  | 8.5   | 3/4        | 1 29/32 | 1 13/32 | 9/16  | 6.44 | 13/16  | 1 3/4 | 1 1/2 | 11/16 | 9 7/8 | 11 1/4 | 15/16  | 5 1/8      | 3 7/32 | 3 3/4 |       |
| 10   | 10.63 | 1          | 2 1/8   | 1 7/8   | 11/16 | 7.97 | 1 1/16 |       |       | 2     | 7/8   | 12 3/8 | 14 1/8 |            | 6 3/8  | 4 1/8 | 4 5/8 |
| 12   | 12.63 | 1 1/4      | 2 1/8   | 1 7/8   | 11/16 | 9.41 | 1 1/16 |       |       | 2     | 7/8   | 14 1/2 | 16 1/4 |            | 6 7/8  | 4 5/8 | 5 1/8 |
| 14   | 14.63 | 1 1/4      | 2 5/8   | 2 1/8   | 3/4   |      | 1 5/16 |       |       | 2 1/2 | 1 1/8 | 17     | 19 1/4 |            | 8 1/8  | 5 1/2 | 5 7/8 |

\* Upper surface spot faced for socket head screws

| BORE | EB    | NT      | TN    | ND    | AB     | AH     | AL      | AO     | AT  | S      | ADD STROKE |       |  |
|------|-------|---------|-------|-------|--------|--------|---------|--------|-----|--------|------------|-------|--|
|      |       |         |       |       |        |        |         |        |     |        | SA         | SN    |  |
| 7.0  | 11/16 | 3/4-10  | 3 1/2 | 1 1/8 | 13/16  | 3 3/4  | 1 13/16 | 11/16  | 1/8 |        | 8 3/4      | 3 1/4 |  |
| 8.0  | 11/16 | 3/4-10  | 4 1/2 | 1 1/8 | 13/16  | 4 1/4  | 1 13/16 | 11/16  | 1/8 | 7 1/8  | 8 3/4      | 3 1/4 |  |
| 10   | 13/16 | 1-8     | 5 1/2 | 1 1/2 | 1 1/16 | 5 5/16 | 2 1/8   | 7/8    | 1/4 | 8 7/8  | 10 5/8     | 4 1/8 |  |
| 12   | 13/16 | 1-8     | 7 1/4 | 1 1/2 | 1 1/16 | 6 3/8  | 2 1/8   | 7/8    | 3/8 | 11     | 11 1/8     | 4 5/8 |  |
| 14   | 15/16 | 1 1/4-7 | 8 3/8 | 1 7/8 | 1 5/16 | 7 3/8  | 2 7/16  | 1 1/16 | 3/8 | 12 5/8 | 13         | 5 1/2 |  |

Table 2 - Rod Dimensions

| BORE  | Rod<br>Size<br>MM | #1<br>CC | #2 & #4<br>KK | #3<br>FF | A     | B<br>+/- .001 | C   | D       | V     | WF    | XA       | XS      | XT      | ADD<br>STROKE |  |
|-------|-------------------|----------|---------------|----------|-------|---------------|-----|---------|-------|-------|----------|---------|---------|---------------|--|
|       |                   |          |               |          |       |               |     |         |       |       |          |         |         | ZB            |  |
| 7.0   | 1 3/8             | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 5/8 | 1 3/16  | 1     | 1 5/8 | 8 1/4    | 2 5/16  | 2 13/16 | 7 7/16        |  |
|       | 1 3/4             | 1 1/2-12 | 1 1/4-12      | 1 3/4-12 | 2     | 2.373         | 5/8 | 1 1/2   | 1 1/8 | 1 7/8 | 8 1/2    | 2 9/16  | 3 1/16  | 7 9/16        |  |
|       | 2                 | 1 3/4-12 | 1 1/4-12      | 2-12     | 2 1/4 | 2.623         | 7/8 | 1 11/16 | 1 1/8 | 2     | 8 5/8    | 2 11/16 | 3 3/16  | 7 11/16       |  |
|       | 1 3/8             | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 5/8 | 1 3/16  | 1     | 1 5/8 | 8 9/16   | 2 5/16  | 2 13/16 | 7 7/16        |  |
| 8.0   | 1 3/4             | 1 1/2-12 | 1 1/4-12      | 1 3/4-12 | 2     | 2.373         | 5/8 | 1 1/2   | 1 1/8 | 1 7/8 | 8 13/16  | 2 9/16  | 3 1/16  | 7 9/16        |  |
|       | 2                 | 1 3/4-12 | 1 1/4-12      | 2-12     | 2 1/4 | 2.623         | 7/8 | 1 11/16 | 1 1/8 | 2     | 8 15/16  | 2 11/16 | 3 3/16  | 7 11/16       |  |
|       | 1 3/4             | 1 1/2-12 | 1 1/4-12      | 1 3/4-12 | 2     | 2.373         | 3/4 | 1 1/2   | 1 1/8 | 1 7/8 | 10 3/8   | 2 3/4   | 3 1/8   | 8 15/16       |  |
|       | 2                 | 1 3/4-12 | 1 1/2-12      | 2-12     | 2 1/4 | 2.623         | 3/4 | 1 3/4   | 1 1/8 | 1 7/8 | 10 1/2   | 2 7/8   | 3 1/4   | 9 1/16        |  |
| 10.00 | 2 1/2             | 2 1/4-12 | 1 7/8-12      | 2 1/2-12 | 3     | 3.123         | 1   | 2 1/16  | 1 1/4 | 2 1/4 | 10 3/4   | 3 1/8   | 3 1/2   | 9 5/16        |  |
|       | 2                 | 1 3/4-12 | 1 1/2-12      | 2-12     | 2 1/4 | 2.623         | 7/8 | 1 3/4   | 1 1/8 | 2     | 11       | 2 7/8   | 3 1/4   | 9 1/8         |  |
|       | 2 1/2             | 2 1/4-12 | 1 7/8-12      | 2 1/2-12 | 3     | 3.123         | 7/8 | 2 1/16  | 1 1/8 | 2     | 11 1/4   | 3 1/8   | 3 1/2   | 9 9/16        |  |
|       | 3                 | 2 3/4-12 | 2 1/4-12      | 3-12     | 3 1/2 | 3.748         | 1   | 2 5/8   | 1 1/4 | 2 1/4 | 11 1/4   | 3 1/8   | 3 1/2   | 9 13/16       |  |
| 12.00 | 2 1/2             | 2 1/4-12 | 1 7/8-12      | 2 1/2-12 | 3     | 3.123         | 1   | 2 1/16  | 1 1/4 | 2 1/4 | 12 13/16 | 3 3/8   | 3 13/16 | 11 1/8        |  |
|       | 3                 | 2 3/4-12 | 2 1/4-12      | 3-12     | 3 1/2 |               |     |         |       |       |          |         |         |               |  |

# STAR3 CYLINDERS

ST3S7 - End Lug Mount  
NFPA MS7

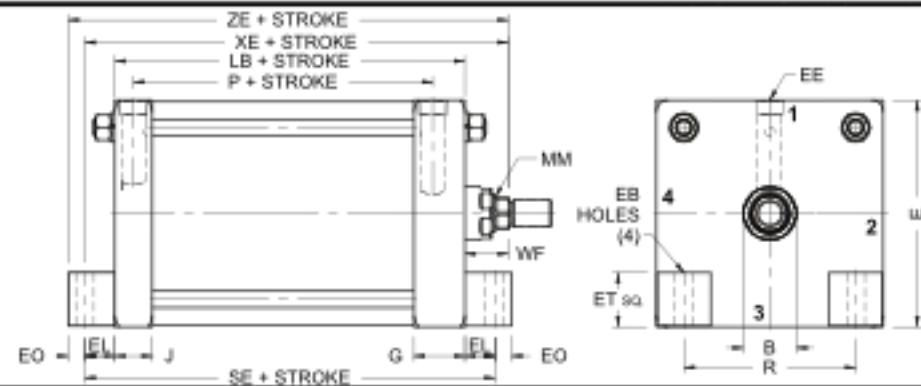
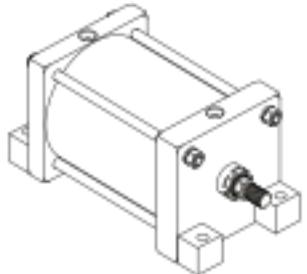


Table 1 - Envelope and Mounting Dimensions


| BORE | E     | EE<br>NPTF | G       | J       | K     | R     | EB    | EL     | EO  | ET    | Add Stroke |        |        |
|------|-------|------------|---------|---------|-------|-------|-------|--------|-----|-------|------------|--------|--------|
|      |       |            |         |         |       |       |       |        |     |       | LB         | P      | SE     |
| 7.0  | 7.5   | 3/4        | 1 29/32 | 1 13/32 | 9/16  | 5.73  | 11/16 | 1 1/8  | 5/8 | 2     | 5 1/8      | 3 7/32 | 7 3/8  |
| 8.0  | 8.5   | 3/4        | 1 29/32 | 1 13/32 | 9/16  | 6.44  | 11/16 | 1 1/8  | 5/8 | 2     | 5 1/8      | 3 7/32 | 7 3/8  |
| 10   | 10.63 | 1          | 2 1/8   | 1 7/8   | 11/16 | 7.97  | 13/16 | 1 5/16 | 5/8 | 2 3/4 | 6 3/8      | 4 1/8  | 9      |
| 12   | 12.63 | 1 1/4      | 2 1/8   | 1 7/8   | 11/16 | 9.41  | 13/16 | 1 5/16 | 5/8 | 3 1/2 | 6 7/8      | 4 5/8  | 9 1/2  |
| 14   | 14.63 | 1 1/4      | 2 5/8   | 2 1/8   | 3/4   | 10.90 | 15/16 | 1 1/2  | 3/4 | 4     | 8 1/8      | 5 1/2  | 11 1/8 |

Table 2 - Rod Dimensions


| BORE  | Rod Size<br>MM | #1<br>CC | #2 & #4<br>KK | #3<br>FF | A     | B<br>+/- .001 | C   | D       | V     | WF    | Add Stroke |         |
|-------|----------------|----------|---------------|----------|-------|---------------|-----|---------|-------|-------|------------|---------|
|       |                |          |               |          |       |               |     |         |       |       | ZE         | XE      |
| 7.0   | 1 3/8          | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 5/8 | 1 3/16  | 1     | 1 5/8 | 8 1/2      | 7 7/8   |
|       | 1 3/4          | 1 1/2-12 | 1 1/4-12      | 1 3/4-12 | 2     | 2.373         | 5/8 | 1 1/2   | 1 1/8 | 1 7/8 | 8 3/4      | 8 1/8   |
|       | 2              | 1 3/4-12 | 1 1/4-12      | 2-12     | 2 1/4 | 2.623         | 7/8 | 1 11/16 | 1 1/8 | 2     | 8 7/8      | 8 1/4   |
| 8.0   | 1 3/8          | 1 1/4-12 | 1-14          | 1 3/8-12 | 1 5/8 | 1.998         | 5/8 | 1 3/16  | 1     | 1 5/8 | 8 1/2      | 7 7/8   |
|       | 1 3/4          | 1 1/2-12 | 1 1/4-12      | 1 3/4-12 | 2     | 2.373         | 5/8 | 1 1/2   | 1 1/8 | 1 7/8 | 8 3/4      | 8 1/8   |
|       | 2              | 1 3/4-12 | 1 1/4-12      | 2-12     | 2 1/4 | 2.623         | 7/8 | 1 11/16 | 1 1/8 | 2     | 8 7/8      | 8 1/4   |
| 10.00 | 1 3/4          | 1 1/2-12 | 1 1/4-12      | 1 3/4-12 | 2     | 2.373         | 3/4 | 1 1/2   | 1 1/8 | 1 7/8 | 10 3/16    | 9 9/16  |
|       | 2              | 1 3/4-12 | 1 1/2-12      | 2-12     | 2 1/4 | 2.623         | 3/4 | 1 3/4   | 1 1/8 | 1 7/8 | 10 5/16    | 9 11/16 |
|       | 2 1/2          | 2 1/4-12 | 1 7/8-12      | 2 1/2-12 | 3     | 3.123         | 1   | 2 1/16  | 1 1/4 | 2 1/4 | 10 9/16    | 9 15/16 |
| 12.00 | 2              | 1 3/4-12 | 1 1/2-12      | 2-12     | 2 1/4 | 2.623         | 7/8 | 1 3/4   | 1 1/8 | 2     | 10 13/16   | 10 3/16 |
|       | 2 1/2          | 2 1/4-12 | 1 7/8-12      | 2 1/2-12 | 3     | 3.123         | 7/8 | 2 1/16  | 1 1/8 | 2     | 11 1/16    | 10 7/16 |
|       | 3              | 2 3/4-12 | 2 1/4-12      | 3-12     | 3 1/2 | 3.748         | 1   | 2 5/8   | 1 1/4 | 2 1/4 | 11 1/16    | 10 7/16 |
| 14.00 | 2 1/2          | 2 1/4-12 | 1 7/8-12      | 2 1/2-12 | 3     | 3.123         | 1   | 2 1/16  | 1 1/4 | 2 1/4 | 12 5/8     | 11 7/8  |
|       | 3              | 2 3/4-12 | 2 1/4-12      | 3-12     | 3 1/2 | 3.748         | 1   | 2 5/8   | 1 1/4 | 2 1/4 | 12 5/8     | 11 7/8  |
|       | 3 1/2          | 3 1/4-12 | 2 1/2-12      | 3 1/2-12 | 3 1/2 | 4.248         | 1   | 3       | 1 1/4 | 2 1/4 | 12 5/8     | 11 7/8  |

## ROD END STYLE


Studded Male #2S

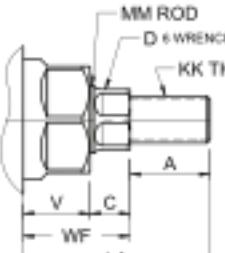


Male #2

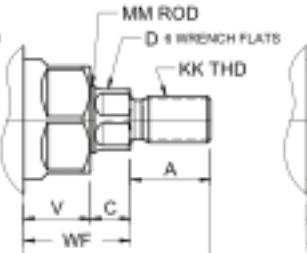


Intermediate Male #1

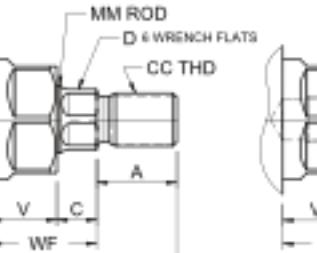

Female #4

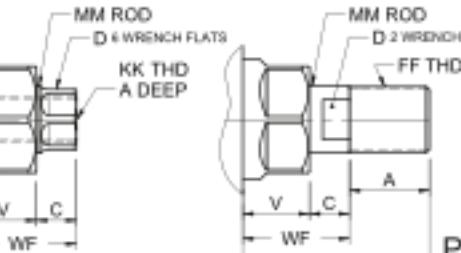

Full Male #3

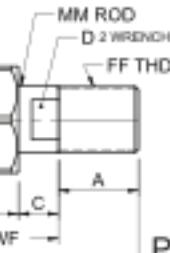


\* FOR 5/8 & 1" ROD, THE ROD END WILL BE STUDDED #2S STANDARD

## 7 TO 14" BORE SINGLE ROD FOOT MOUNT MS7

# STAR3 CYLINDERS

STFC - Flow Control Elbow Fittings

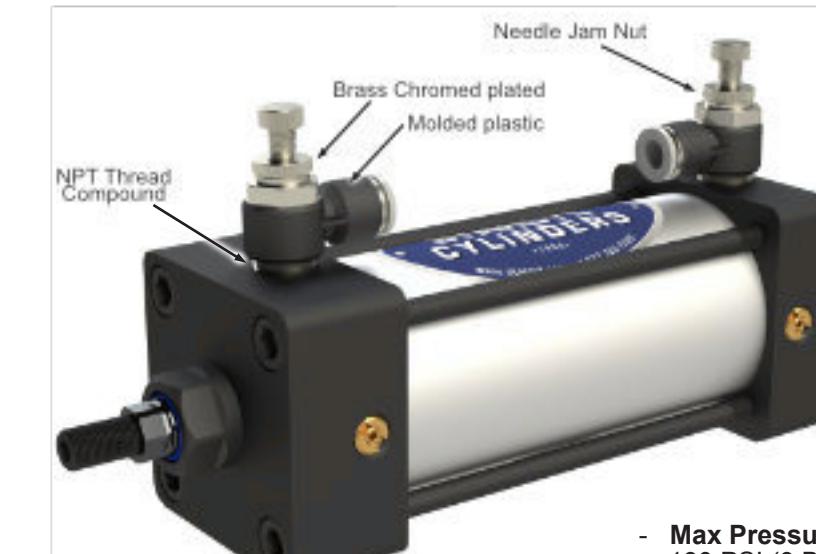



- Max Pressure  
130 PSI (9 Bar)

- Temperature Range  
32°F to 140°F (0°C to 60°C)

## OPTIONS - Flow Control

### A Meter-out (Exhaust)


Air from thread side is controlled. Air from tube side is not controlled and flows out from thread side.

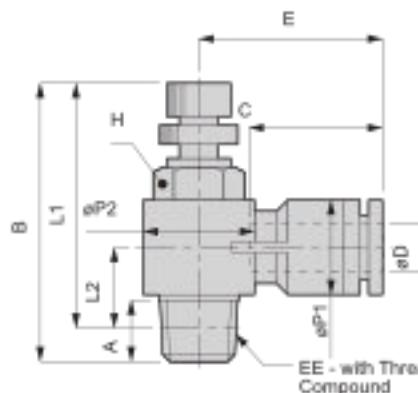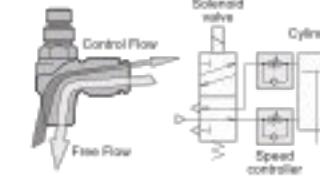

| Model Code     | tub<br>e OD | EE     | A   | B    |      | L1   |      | L2   | P1   | P2   | TUBE<br>END | E    | HEX | X    | Weight |
|----------------|-------------|--------|-----|------|------|------|------|------|------|------|-------------|------|-----|------|--------|
|                |             |        |     | MAX  | MIN  | MAX  | MIN  |      |      |      |             |      |     |      | OZ     |
| STFCA-N06-T3/8 | 3/8         | 3/8NPT | .52 | 2.14 | 1.85 | 1.90 | 1.61 | 0.57 | 0.69 | 0.87 | 0.79        | 1.23 | 3/4 | 0.66 | 2.43   |
| STFCA-N06-T1/4 | 1/4         | 3/8NPT | .52 | 2.14 | 1.85 | 1.90 | 1.61 | 0.57 | 0.69 | 0.87 | 0.79        | 1.23 | 3/4 | 0.66 | 2.43   |
| STFCA-N08-T1/2 | 1/2         | 1/2NPT | .63 | 2.35 | 2.06 | 2.03 | 1.74 | 0.78 | 0.83 | 1.10 | 0.93        | 1.44 | 1   | 0.78 | 4.27   |
| STFCA-N08-T3/8 | 3/8         | 1/2NPT | .63 | 2.35 | 2.06 | 2.03 | 1.74 | 0.78 | 0.83 | 1.10 | 0.93        | 1.44 | 1   | 0.78 | 4.27   |

## Your Special Option

Starcyl is well known for their fast response to custom application, so let us quote your special requirements in cylinders. Model Code SPxxxx

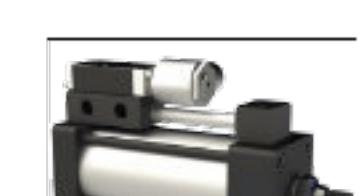

Cylinder with Manifold Cap Mount for the valve and including pipe to the head end with a small manifold. (Explosion Proof Valve Shown)



Lifter 4 Post. Ex: 5" bore, 4" stroke, main rod 1.75" dia and the 4 post at 1" dia. The post are guarded by thin wall tubing.



STARCYL CYLINDER CORP

20 Ron Joye Road, Hemingway  
South Carolina, 29554  
1-877-STARCYL (782-7295)  
[www.Starcyl.com](http://www.Starcyl.com)

STARCYL CANADA INC

2340 Michelin Street, Laval  
Quebec, Canada, H7L 5C3  
1-877-STARCYL (782-7295)  
[www.Starcyl.ca](http://www.Starcyl.ca)

# STAR3 CYLINDERS

## 1.5 TO 14" BORE SINGLE ROD SPHERICAL BEARING MSD & MSB MOUNT

ST3SD - Detachable Spherical Mount 1.5 to 6" bore


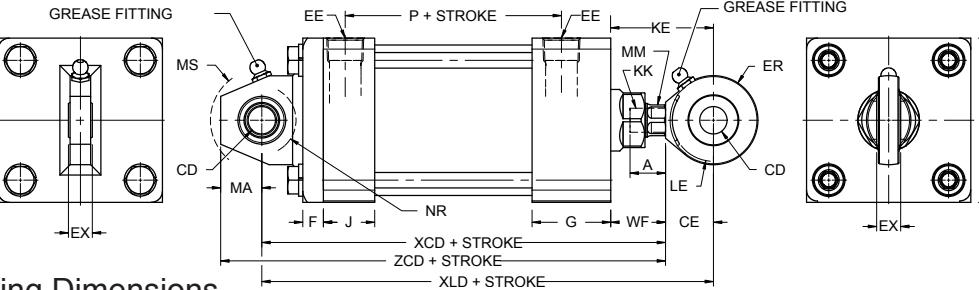


Table 1 - Envelope and Mounting Dimensions

| BORE | E     | EE<br>NPTF | G       | J      | F   | CD<br>+.000<br>-.001 | CE    | ER    | EX     | LE     | MA    | MS      | NR    | Add Stroke |         |
|------|-------|------------|---------|--------|-----|----------------------|-------|-------|--------|--------|-------|---------|-------|------------|---------|
|      |       |            |         |        |     |                      |       |       |        |        |       |         |       | LB         | P       |
| 1.5  | 2     | 3/8        | 1 7/16  | 15/16  | 3/8 | .500                 | 7/8   | 13/16 | 7/16   | 3/4    | 3/4   | 15/16   | 5/8   | 3 5/8      | 2 21/64 |
| 2.0  | 2 1/2 | 3/8        | 1 7/16  | 15/16  | 3/8 | .500                 | 7/8   | 13/16 | 7/16   | 3/4    | 3/4   | 15/16   | 5/8   | 3 5/8      | 2 21/64 |
| 2.5  | 3     | 3/8        | 1 7/16  | 15/16  | 3/8 | .500                 | 7/8   | 13/16 | 7/16   | 3/4    | 3/4   | 15/16   | 5/8   | 3 3/4      | 2 29/64 |
| 3.25 | 3 3/4 | 1/2        | 1 11/16 | 1 3/16 | 5/8 | .750                 | 1 1/4 | 1 1/8 | 11/16  | 11/16  | 1     | 1 3/8   | 1     | 4 1/4      | 2 21/32 |
| 4.0  | 4 1/2 | 1/2        | 1 11/16 | 1 3/16 | 5/8 | .750                 | 1 1/4 | 1 1/8 | 11/16  | 11/16  | 1     | 1 3/8   | 1     | 4 1/4      | 2 21/32 |
| 5.0  | 5 1/2 | 1/2        | 1 11/16 | 1 3/16 | 5/8 | .750                 | 1 1/4 | 1 1/8 | 11/16  | 11/16  | 1     | 1 3/8   | 1     | 4 1/2      | 2 29/32 |
| 6.0  | 6 1/2 | 3/4        | 1 15/16 | 1 7/16 | 3/4 | 1.000                | 1 7/8 | 1 1/4 | 1 7/16 | 1 7/16 | 1 1/4 | 1 11/16 | 1 1/4 | 5          | 3 3/32  |

Table 2 - Rod Dimensions

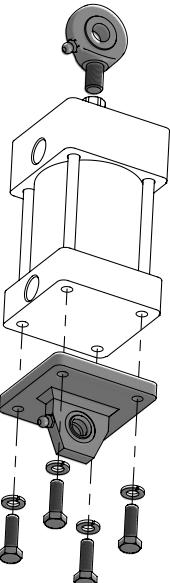

| BORE  | ROD<br>SIZE | #4<br>KK | #7<br>KK | A     | WF    | KE    | Add Stroke |       |        |        |
|-------|-------------|----------|----------|-------|-------|-------|------------|-------|--------|--------|
|       |             |          |          |       |       |       | XCD        | XLD   | ZCD    |        |
| 1 1/2 | 5/8         | 7/16-20  | -        | 3/4   | 5/8   | 1 1/2 | 5 3/4      | 6 5/8 | 6 1/2  |        |
|       | 1           | -        | 7/16-20  | 3/4   | 1     | 1 7/8 | 6 1/8      | 7     | 6 7/8  |        |
| 2     | 5/8         | 7/16-20  | -        | 3/4   | 5/8   | 1 1/2 | 5 3/4      | 6 5/8 | 6 1/2  |        |
|       | 1           | -        | 7/16-20  | 3/4   | 1     | 1 7/8 | 6 1/8      | 7     | 6 7/8  |        |
| 2.5   | 1 3/8       | -        | 7/16-20  | 3/4   | 1 1/4 | 2 1/8 | 6 3/8      | 7 1/4 | 7 1/8  |        |
|       | 5/8         | 7/16-20  | -        | 3/4   | 5/8   | 1 1/2 | 5 3/4      | 6 5/8 | 6 1/2  |        |
| 3.25  | 1           | -        | 7/16-20  | 3/4   | 1     | 1 7/8 | 6 1/8      | 7     | 6 7/8  |        |
|       | 1 3/8       | -        | 7/16-20  | 3/4   | 1 1/4 | 2 1/8 | 6 3/8      | 7 1/4 | 7 1/8  |        |
| 4     | 1 3/8       | -        | 3/4-16   | 1 1/8 | 1     | 2 1/4 | 7 1/2      | 8 3/4 | 8 1/2  |        |
|       | 1 3/4       | -        | 3/4-16   | 1 1/8 | 1 1/4 | 2 1/2 | 7 3/4      | 9     | 8 3/4  |        |
| 5     | 1           | 3/4-16   | -        | 1 1/8 | 3/4   | 2     | 7 1/4      | 8 1/2 | 8 1/4  |        |
|       | 1 3/8       | -        | 3/4-16   | 1 1/8 | 1     | 2 1/4 | 7 1/2      | 8 3/4 | 8 1/2  |        |
| 6     | 1 3/8       | -        | 3/4-16   | 1 1/8 | 1 1/4 | 2 1/2 | 7 3/4      | 9     | 8 3/4  |        |
|       | 1 3/4       | -        | 1-14     | 1-14  | 1 5/8 | 7/8   | 2 3/4      | 8 1/2 | 10 3/8 | 9 3/4  |
| 8     | 1 3/4       | -        | 1-14     | 1-14  | 1 5/8 | 1 1/8 | 3          | 8 3/4 | 10 5/8 | 10     |
|       | 2           | -        | 1-14     | 1-14  | 1 5/8 | 1 1/4 | 3 1/8      | 8 7/8 | 10 3/4 | 10 1/8 |

ST3SB - Fixed Spherical Mount 8 to 14" bore

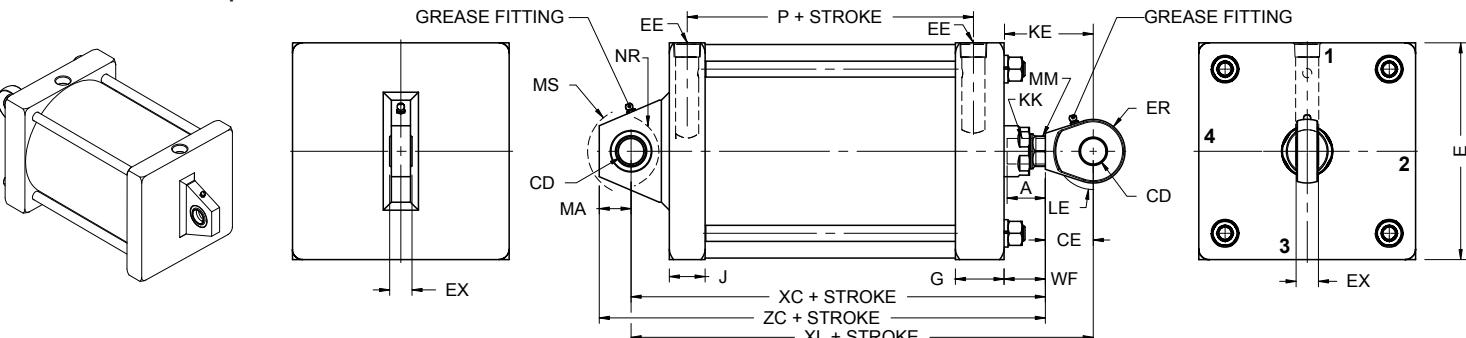



Table 3 - Envelope and Mounting Dimensions

| BORE | E     | EE<br>NPTF | G       | J       | CD<br>+.000<br>-.001 | CE    | ER      | EX      | LE     | MA     | MS      | NR     | Add Stroke |        |  |  |
|------|-------|------------|---------|---------|----------------------|-------|---------|---------|--------|--------|---------|--------|------------|--------|--|--|
|      |       |            |         |         |                      |       |         |         |        |        |         |        | LB         | P      |  |  |
| 8    | 8.5   | 3/4        | 1 29/32 | 1 13/32 | 1.000                | 1 7/8 | 1 1/4   | 7/8     | 1 7/16 | 1 1/4  | 1 11/16 | 1 1/4  | 5 1/8      | 3 7/32 |  |  |
| 10   | 10.63 | 1          | 2 1/8   | 1 7/8   | 1.375                | 2 1/8 | 1 11/16 | 1 3/16  | 1 7/8  | 2 7/16 | 1 5/8   | 6 3/8  | 4 1/8      |        |  |  |
| 12   | 12.63 | 1          | 2 1/8   | 1 7/8   | 1.750                | 2 1/2 | 2 1/16  | 1 17/32 | 2 1/8  | 2 1/2  | 2 7/8   | 2 1/16 | 6 7/8      | 4 5/8  |  |  |
| 14   | 14.63 | 1 1/4      | 2 5/8   | 2 1/8   | 2.000                | 2 3/4 | 2 1/2   | 1 3/4   | 2 1/2  | 2 1/2  | 3 5/16  | 2 3/8  | 8 1/8      | 5 1/2  |  |  |

# STAR3 CYLINDERS


## CYLINDER ACCESSORIES SPHERICAL BEARING

NFPA Spherical Rod Eye

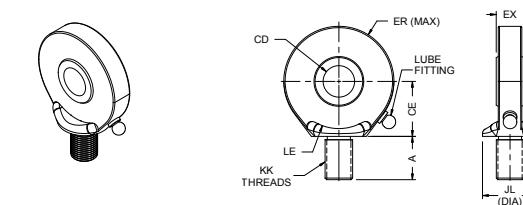

| Bore Size        | Part # | CD          | A     | CE    | EX      | ER      | LE     | KK       | JL     | LOAD  |
|------------------|--------|-------------|-------|-------|---------|---------|--------|----------|--------|-------|
| 1 1/2, 2 & 2 1/2 | RES-05 | .5000-.005  | 11/16 | 7/8   | 7/16    | 13/16   | 3/4    | 7/16-20  | 7/8    | 2644  |
| 3 1/4, 4 & 5     | RES-07 | .7500-.005  | 1     | 1 1/4 | 21/32   | 1 1/8   | 1 1/16 | 3/4-16   | 1 5/16 | 9441  |
| 6 & 8            | RES-10 | 1.0000-.005 | 1 1/2 | 1 7/8 | 7/8     | 1 1/4   | 1 7/16 | 1-14     | 1 1/2  | 16860 |
| 10               | RES-13 | 1.3750-.005 | 2     | 2 1/8 | 1 3/16  | 1 11/16 | 1 7/8  | 1 1/4-12 | 2      | 28562 |
| 12               | RES-17 | 1.7500-.005 | 2 1/8 | 2 1/2 | 1 17/32 | 2 1/16  | 2 1/8  | 1 1/2-12 | 2 1/4  | 43005 |
| 14               | RES-20 | 2.0000-.005 | 2 7/8 | 2 3/4 | 1 3/4   | 2 1/2   | 2 1/2  | 1 7/8-12 | 2 3/4  | 70193 |

NFPA Spherical Pivot Pin





| Bore Size        | Part # | CD         | CL     | LOAD |
|------------------|--------|------------|--------|------|
| 1 1/2, 2 & 2 1/2 | PS-05  | .5000-.004 | 1 9/16 | 8600 |
| 3 1/4, 4 & 5     | PS-07  | .7500-.005 | 2      |      |

# STAR3 CYLINDERS



ST3DR - Double rod End Cylinder

1.5 to 6" bore

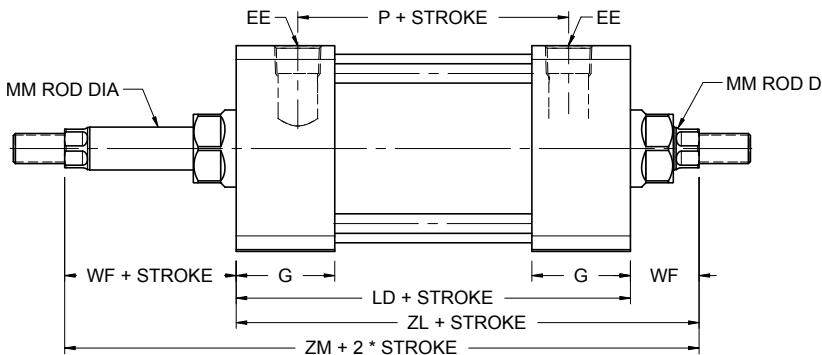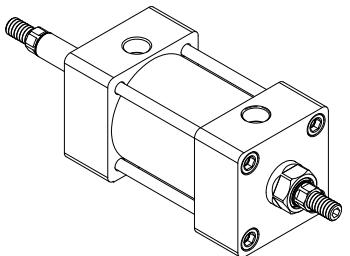


ST3DR - Double rod End Cylinder

7 to 14" bore

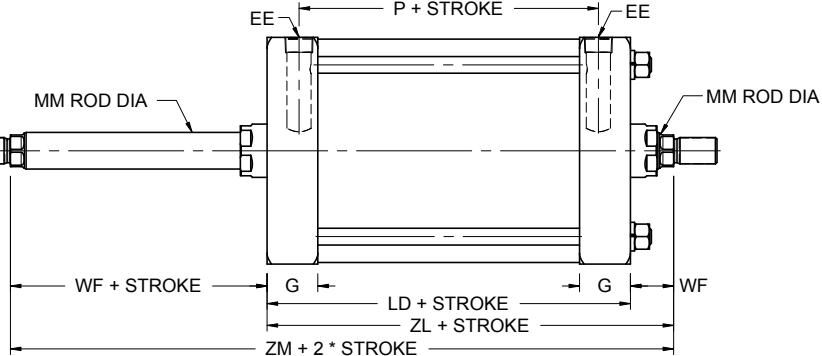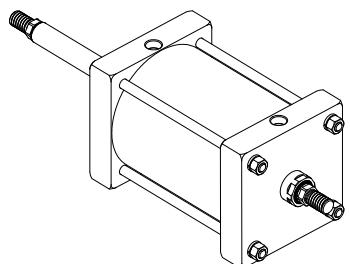


## ROD END STYLE


Studded Male #2S

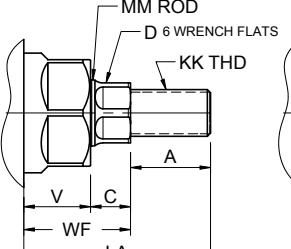


Male #2

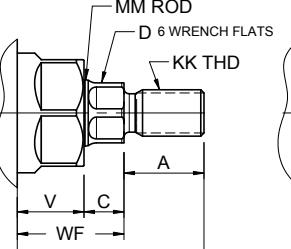


Intermediate Male #1

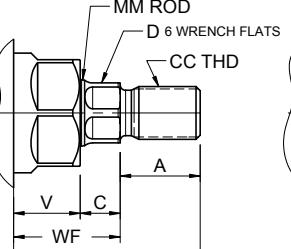

Female #4

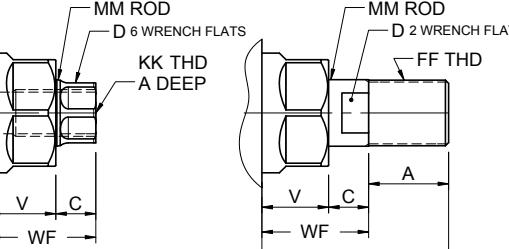

Full Male #3



\* FOR 5/8 & 1" ROD, THE ROD END WILL BE STUDDED #2S STANDARD

# 1.5 TO 14" BORE DOUBLE ROD DOUBLE ROD CYLINDER

# STAR3 CYLINDERS

Table 1 - Envelope and Mounting Dimensions

| BORE  | E     | EE<br>NPTF | G       | K     | R     | ADD STROKE             |                        |                        |                        |       |   |
|-------|-------|------------|---------|-------|-------|------------------------|------------------------|------------------------|------------------------|-------|---|
|       |       |            |         |       |       | SS <sub>D</sub><br>MS2 | SN <sub>D</sub><br>MS4 | SE <sub>D</sub><br>MS7 | SA <sub>D</sub><br>MS1 | LD    | P |
| 1.5   | 2     | 3/8        | 1 7/16  | 1/4   | 1.43  | 3 3/8                  | 2 3/4                  | 6                      | 6.5                    | 4 1/8 |   |
| 2.0   | 2 1/2 | 3/8        | 1 7/16  | 5/16  | 1.84  | 3 3/8                  | 2 3/4                  | 6 3/8                  | 6.5                    | 4 1/8 |   |
| 2.5   | 3     | 3/8        | 1 7/16  | 5/16  | 2.19  | 3 1/2                  | 2 7/8                  | 6 3/4                  | 6.625                  | 4 1/4 |   |
| 3.25  | 3 3/4 | 1/2        | 1 13/16 | 3/8   | 2.76  | 3 3/4                  | 3 1/8                  | 7 1/8                  | 7.875                  | 4 3/4 |   |
| 4.0   | 4 1/2 | 1/2        | 1 13/16 | 3/8   | 3.32  | 3 3/4                  | 3 1/8                  | 7 3/8                  | 7.875                  | 4 3/4 |   |
| 5.0   | 5 1/2 | 1/2        | 1 13/16 | 7/16  | 4.10  | 3 5/8                  | 3 3/8                  | 7 3/4                  | 8.375                  | 5     |   |
| 6.0   | 6 1/2 | 3/4        | 1 15/16 | 7/16  | 4.88  | 4 1/8                  | 3 5/8                  | 8 1/4                  | 9                      | 5 1/2 |   |
| 7.00  | 7.5   | 3/4        | 1 29/32 | 9/16  | 5.73  | 4 1/4                  | 3 3/4                  | 7 7/8                  | 9 1/4                  | 5 5/8 |   |
| 8.00  | 8.5   | 3/4        | 1 29/32 | 9/16  | 6.44  | 4 1/4                  | 3 3/4                  | 7 7/8                  | 9 1/4                  | 5 5/8 |   |
| 10.00 | 10.63 | 1          | 2 1/8   | 11/16 | 7.97  | 4 7/8                  | 4 3/8                  | 9 1/4                  | 10 7/8                 | 6 5/8 |   |
| 12.00 | 12.63 | 1          | 2 1/8   | 11/16 | 9.41  | 5 3/8                  | 4 7/8                  | 9 3/4                  | 11 3/8                 | 7 1/8 |   |
| 14.00 | 14.63 | 1          | 2 3/8   | 3/4   | 10.90 | 6 1/8                  | 5 3/4                  | 11 3/8                 | 13 1/4                 | 8 3/8 |   |

Table 2 - Rod Dimensions

| BORE  | Rod Size<br>MM | #1<br>CC | #2 & #4<br>KK | #3<br>FF | A     | B<br>+/- .001 | C      | D     | V     | WF      | Add Stroke            |          |                  |
|-------|----------------|----------|---------------|----------|-------|---------------|--------|-------|-------|---------|-----------------------|----------|------------------|
|       |                |          |               |          |       |               |        |       |       |         | ALL MOUNTING<br>STYLE |          | Add 2X<br>Stroke |
|       |                |          |               |          |       |               |        |       |       |         | MS7                   | MS1      | ZM               |
| 1.5   | 5/8            | 1/2-20   | 7/16-20       | 5/8-18   | 3/4   | 1.123         | 3/8    | 1/2   | 5/8   | 1       | 5 1/8                 | 5 7/8    | 6 1/8            |
|       | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2    | 7/8   | 7/8   | 1 3/8   | 5 1/2                 | 6 1/4    | 6 7/8            |
| 2.0   | 5/8            | 1/2-20   | 7/16-20       | 5/8-18   | 3/4   | 1.123         | 3/8    | 1/2   | 5/8   | 1       | 5 1/8                 | 6 1/16   | 6 3/8            |
|       | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2    | 7/8   | 7/8   | 1 3/8   | 5 1/2                 | 6 7/16   | 6 7/8            |
| 2.5   | 1 1/4-12       | 1-14     | 1 3/8-12      | 1 5/8    | 1.998 | 5/8           | 1 3/16 | 1     | 1 5/8 | 5 3/4   | 6 11/16               | 7        | 7 3/8            |
|       | 5/8            | 1/2-20   | 7/16-20       | 5/8-18   | 3/4   | 1.123         | 3/8    | 1/2   | 5/8   | 1       | 5 1/4                 | 6 5/16   | 6 5/8            |
| 3.25  | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2    | 7/8   | 7/8   | 1 3/8   | 5 5/8                 | 6 11/16  | 7                |
|       | 1 1/4-12       | 1-14     | 1 3/8-12      | 1 5/8    | 1.998 | 5/8           | 1 3/16 | 1     | 1 5/8 | 5 7/8   | 6 15/16               | 7 1/4    | 7 1/2            |
| 4.0   | 1 1/4-12       | 1-14     | 1 3/8-12      | 1 5/8    | 1.998 | 1/2           | 1 3/16 | 1     | 1 5/8 | 6 3/8   | 7 3/8                 | 7 3/4    | 8                |
|       | 1 1/2-12       | 1 1/4-12 | 1 3/4-12      | 2        | 2.373 | 5/8           | 1 1/2  | 1 1/8 | 1 7/8 | 6 5/8   | 7 1/2                 | 7 7/8    | 8 1/2            |
| 5.0   | 1              | 7/8-14   | 3/4-16        | 1-14     | 1 1/8 | 1.498         | 1/2    | 7/8   | 7/8   | 1 3/8   | 6 3/8                 | 7 7/16   | 7 3/4            |
|       | 1 1/4-12       | 1-14     | 1 3/8-12      | 1 5/8    | 1.998 | 1/2           | 1 3/16 | 1     | 1 5/8 | 6 5/8   | 7 11/16               | 8 3/16   | 8 1/4            |
| 6.0   | 1 1/4-12       | 1-14     | 1 3/8-12      | 1 5/8    | 1.998 | 5/8           | 1 3/16 | 1     | 1 5/8 | 7 1/8   | 8 1/8                 | 8 5/8    | 8 3/4            |
|       | 1 1/2-12       | 1 1/4-12 | 1 3/4-12      | 2        | 2.373 | 5/8           | 1 1/2  | 1 1/8 | 1 7/8 | 7 3/8   | 8 3/8                 | 8 7/8    | 9 1/4            |
| 7.0   | 1 1/4-12       | 1-14     | 1 3/8-12      | 1 5/8    | 1.998 | 5/8           | 1 3/16 | 1     | 1 5/8 | 7 15/16 | 9                     | 8 3/8    | 9 9/16           |
|       | 1 1/2-12       | 1 1/4-12 | 1 3/4-12      | 2        | 2.373 | 5/8           | 1 1/2  | 1 1/8 | 1 7/8 | 8 1/16  | 9 1/4                 | 8 5/8    | 9 15/16          |
| 8.0   | 1 1/4-12       | 1-14     | 1 3/8-12      | 1 5/8    | 1.998 | 5/8           | 1 3/16 | 1     | 1 5/8 | 7 15/16 | 9                     | 8 3/8    | 9 9/16           |
|       | 1 1/2-12       | 1 1/4-12 | 1 3/4-12      | 2        | 2.373 | 5/8           | 1 1/2  | 1 1/8 | 1 7/8 | 8 1/16  | 9 1/4                 | 8 5/8    | 9 15/16          |
| 10.00 | 1 1/2-12       | 1 1/4-12 | 1 3/4-12      | 2        | 2.373 | 3/4           | 1 1/2  | 1 1/8 | 1 7/8 | 9 3/16  | 10 7/16               | 9 13/16  | 11 1/16          |
|       | 2              | 1 3/4-12 | 1 1/2-12      | 2-12     | 2.623 | 3/4           | 1 3/4  | 1 1/8 | 1 7/8 | 9 5/16  | 10 9/16               | 9 15/16  | 11 3/16          |
| 12.00 | 2 1/2-12       | 1 7/8-12 | 2 1/2-12      | 3        | 3.123 | 1             | 2 1/16 | 1 1/4 | 2 1/4 | 9 9/16  | 10 13/16              | 10 3/16  | 11 13/16         |
|       | 3              | 2 3/4-12 | 2 1/4-12      | 3-12     | 3 1/2 | 3.748         | 1      | 2 5/8 | 1 1/4 | 2 1/4   | 9 3/8                 | 11 1/16  | 10 7/16          |
| 14.00 | 2 1/2-12       | 1 7/8-12 | 2 1/2-12      | 3        | 3.123 | 1             | 2 1/16 | 1 1/4 | 2 1/4 | 9 13/16 | 11 5/16               | 10 11/16 | 11 13/1          |

# STAR3 CYLINDERS



## BACK TO BACK

This Model is two cylinders mounted back to back. Each cylinder can be operated independently. The cylinders can have the same stroke or different strokes. This configuration enables you to have four positions of rods extended or retracted.

Unlike a three-position cylinder (Multi position page XX), a back-to-back cylinder provides "Hard" stop positioning.



### ST3BBX5 Back To Back

Right cylinder Short Stroke Tie rods bolted into Long stroke Left cylinder Cap end

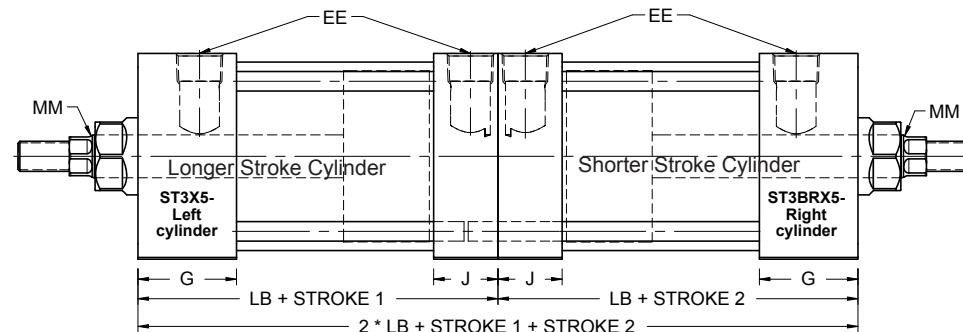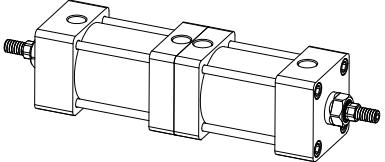



### ST3BBX0 Back To Back

Single Tie rods design

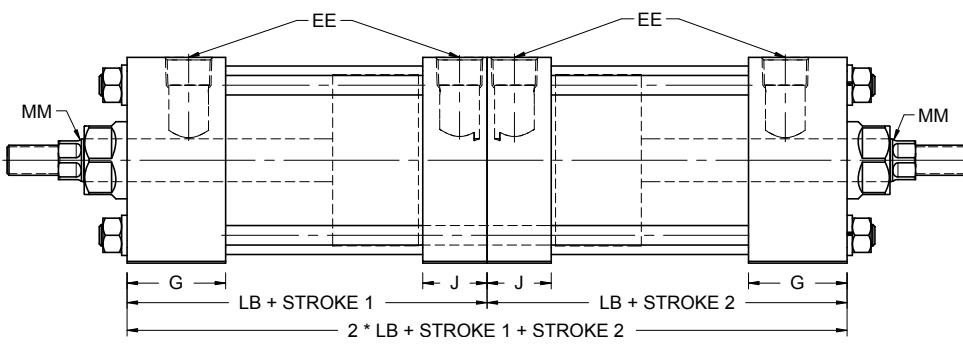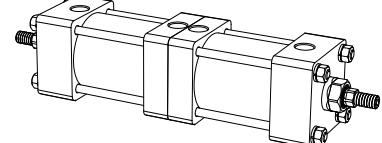

### ST3BBX5F2 Back To Back

2 Cylinders bolted by rear Flange

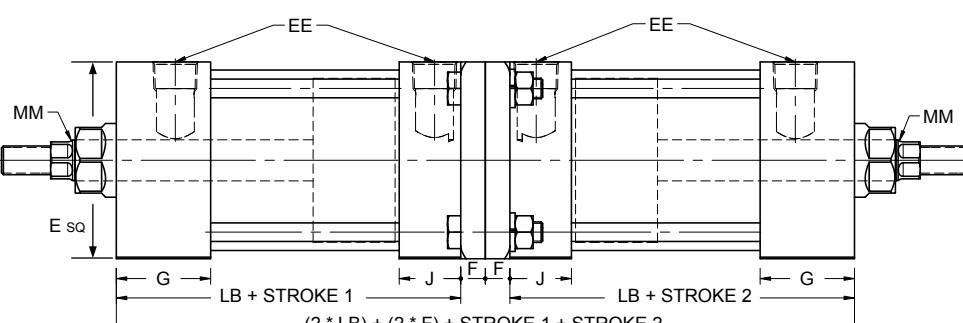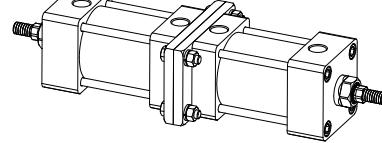

### Table 1 - Envelope and Mounting Dimensions

| BORE  | MM             | E     | EE  | G       | J      | LB    | R     |
|-------|----------------|-------|-----|---------|--------|-------|-------|
| 1 1/2 | 5/8 & 1"       | 2     | 3/8 | 1 7/16  | 15/16  | 3 5/8 | 1.430 |
| 2     | 5/8 & 1"       | 2 1/2 | 3/8 | 1 7/16  | 15/16  | 3 5/8 | 1.840 |
| 2 1/2 | 5/8 & 1"       | 3     | 3/8 | 1 7/16  | 15/16  | 3 3/4 | 2.190 |
| 3 1/4 | 1 & 1 3/8"     | 3 3/4 | 1/2 | 1 11/16 | 1 3/16 | 4 1/4 | 2.760 |
| 4     | 1 & 1 3/8"     | 4 1/2 | 1/2 | 1 11/16 | 1 3/16 | 4 1/4 | 3.320 |
| 5     | 1 & 1 3/8"     | 5 1/2 | 1/2 | 1 11/16 | 1 3/16 | 4 1/2 | 4.120 |
| 6     | 1 3/8 & 1 3/4" | 6 1/2 | 3/4 | 1 15/16 | 1 7/16 | 5     | 4.880 |

Also available in 7", 8", 10 & 12" bore

# STAR3 CYLINDERS

## MULTI-POSITION & TANDEM

### ST3MPX5 Multi-position

This model consists of multiple cylinders built as one unit having only one exposed working rod end, capable of delivering at least 3 positions. (Piston rod not attached) Three-Position cylinders rely on the back of the piston rod to push against the front piston rod to create the intermediate position, Care must be used to prevent the front piston rod from extending in the intermediate position.

Position I : Pressure to port "A" fully retracts cylinder

Position II : Pressure to port "D" advances cylinder to mid-stroke positions

Position III : Pressure to port "C" fully extends cylinder.

B : Breather/Vent

How to make the part number :

Application calls for a 1.5" bore with stroke position of 0", 2" and 4", with front flange mount.

The part number will be : ST3MPF1-1.50X02.00&04.00X0.63-#2...

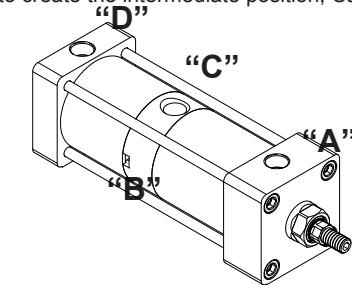


Table 1 - Envelope and Mounting Dimensions

| BORE  | MM             | E     | EE  | G       | J      | LB1   | R     |
|-------|----------------|-------|-----|---------|--------|-------|-------|
| 1 1/2 | 5/8 & 1"       | 2     | 3/8 | 1 7/16  | 15/16  | 5 3/4 | 1.430 |
| 2     | 5/8 & 1"       | 2 1/2 | 3/8 | 1 7/16  | 15/16  | 5 3/4 | 1.840 |
| 2 1/2 | 5/8 & 1"       | 3     | 3/8 | 1 7/16  | 15/16  | 6     | 2.190 |
| 3 1/4 | 1 & 1 3/8"     | 3 3/4 | 1/2 | 1 11/16 | 1 3/16 | 6 3/4 | 2.760 |
| 4     | 1 & 1 3/8"     | 4 1/2 | 1/2 | 1 11/16 | 1 3/16 | 6 3/4 | 3.320 |
| 5     | 1 & 1 3/8"     | 5 1/2 | 1/2 | 1 11/16 | 1 3/16 | 7 1/4 | 4.120 |
| 6     | 1 3/8 & 1 3/4" | 6 1/2 | 3/4 | 1 15/16 | 1 7/16 | 8     | 4.880 |



### ST3TDE5 Tandem Cylinder

The Air over Oil design is the most use of tandem cylinders today. You can use any combination of mounts available.

Air provides the force to extend and retract the cylinder in the first part while the second part filled with oil provides the precise control of the stroke.

By metering the flow of the hydraulic side of the cylinder, a constant velocity is achieved throughout the stroke, even at very slow speed that air cylinder typically chatter.

Other Application is to double the force in Extend or Retract , by supplying air Pressure to both ports in Extend A 1&2 or Retract. B 1&2

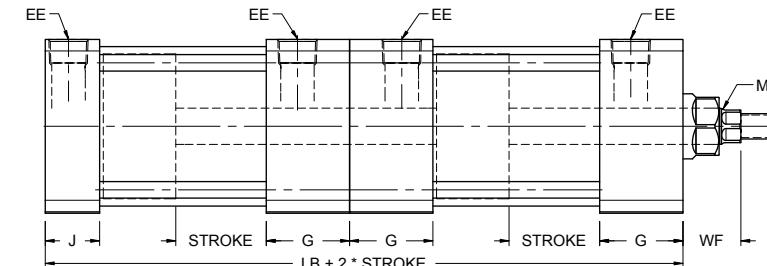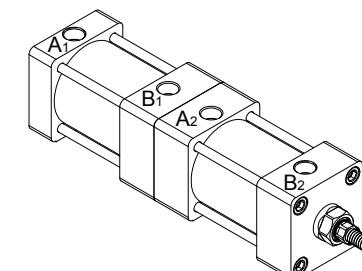

### Table 2 - Envelope and Mounting Dimensions

| MODEL          | BORE  | MM             | E     | EE  | G       | J      | LB    | BL    |
|----------------|-------|----------------|-------|-----|---------|--------|-------|-------|
| ST3TD & ST3OTD | 1 1/2 | 5/8 & 1"       | 2     | 3/8 | 1 7/16  | 15/16  | 3 5/8 | 1.430 |
|                | 2     | 5/8 & 1"       | 2 1/2 | 3/8 | 1 7/16  | 15/16  | 3 5/8 | 1.840 |
|                | 2 1/2 | 5/8 & 1"       | 3     | 3/8 | 1 7/16  | 15/16  | 3 3/4 | 2.190 |
|                | 3 1/4 | 1 & 1 3/8"     | 3 3/4 | 1/2 | 1 11/16 | 1 3/16 | 4 1/4 | 2.760 |
|                | 4     | 1 & 1 3/8"     | 4 1/2 | 1/2 | 1 11/16 | 1 3/16 | 4 1/4 | 3.320 |
|                | 5     | 1 & 1 3/8"     | 5 1/2 | 1/2 | 1 11/16 | 1 3/16 | 4 1/2 | 4.120 |
|                | 6     | 1 3/8 & 1 3/4" | 6 1/2 | 3/4 | 1 15/16 | 1 7/16 | 5     | 4.880 |

Also available in 7", 8", 10 & 12" bore



STARCYL CYLINDER CORP



20 Ron Joye Road, Hemingway  
South Carolina, 29554  
1-877-STARCYL (782-7295)  
www.Starcyl.com

STARCYL CANADA INC



2340 Michelin Street, Laval  
Quebec, Canada, H7L 5C3  
1-877-STARCYL (782-7295)  
www.Starcyl.ca

# STAR3 CYLINDERS


## -NRE Non Rotating External Single

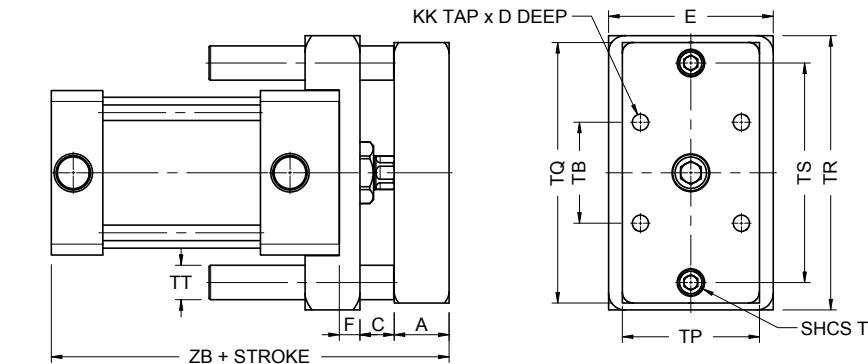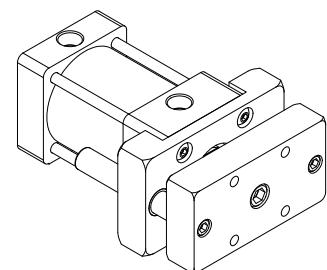

## -NRED Non Rotating External Double

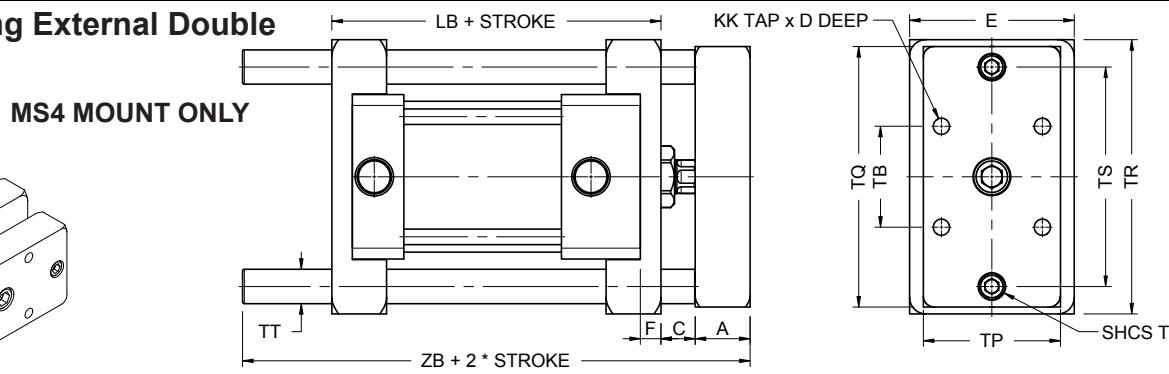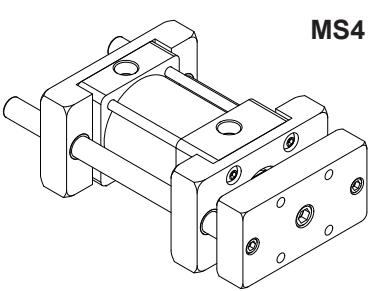


## MP2 MOUNT




| -NRE AND -NRED DIMENSIONS |         |         |         |        |        |        |        |
|---------------------------|---------|---------|---------|--------|--------|--------|--------|
| Bore                      | 1.5     | 2       | 2.5     | 3.25   | 4      | 5      | 6      |
| A                         | 1       | 1       | 1       | 1 1/4  | 1 1/4  | 1 1/4  | 1 1/2  |
| C                         | 5/8     | 5/8     | 5/8     | 3/4    | 3/4    | 3/4    | 7/8    |
| D                         | 3/4     | 3/4     | 1       | 1      | 1      | 1 1/4  | 1 1/2  |
| E                         | 2       | 2 1/2   | 3       | 3 3/4  | 4 1/2  | 5 1/2  | 6 1/2  |
| F                         | 3/8     | 3/8     | 3/8     | 5/8    | 5/8    | 5/8    | 3/4    |
| KK                        | 10-32   | 1/4-28  | 5/16-24 | 3/8-24 | 3/8-24 | 1/2-20 | 1/2-20 |
| TB                        | 1.12    | 1.43    | 1.84    | 2.19   | 2.78   | 3.32   | 4.12   |
| TP                        | 1 1/2   | 2       | 2 1/2   | 3      | 3 3/4  | 4 1/2  | 5 1/2  |
| TQ                        | 3 3/4   | 4 1/4   | 4 3/4   | 6 1/2  | 7 1/4  | 8 1/4  | 10     |
| TR                        | 4       | 4 1/2   | 5       | 6 3/4  | 7 1/2  | 8 1/2  | 10 1/2 |
| TS                        | 3       | 3 1/2   | 4       | 5 1/4  | 6      | 7      | 8 1/2  |
| TT                        | 5/8     | 5/8     | 5/8     | 1      | 1      | 1      | 1 3/8  |
| TU                        | 5/16-24 | 5/16-24 | 5/16-24 | 1/2-20 | 1/2-20 | 1/2-20 | 5/8-18 |
| ZB                        | 5 5/8   | 5 5/8   | 5 3/4   | 6 7/8  | 6 7/8  | 7 1/8  | 8 1/8  |


## MP1 MOUNT




## MP4 MOUNT




## MT2 MOUNT



## MF2 MOUNT




## MX2 MOUNT




# STAR3 CYLINDERS


## ST3TKS1 Air/Oil Tank Angle Mount

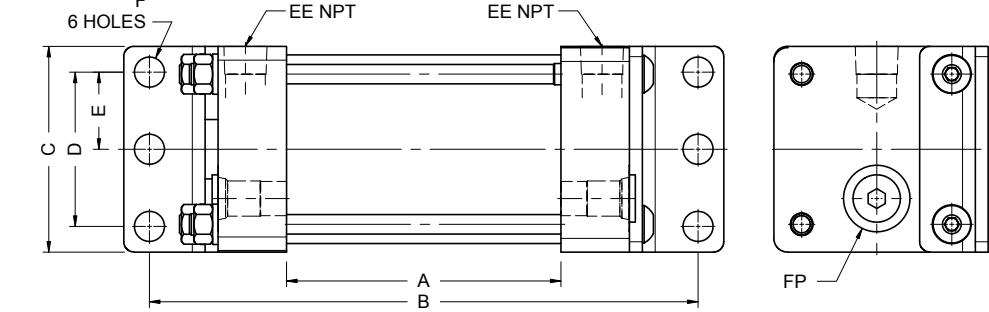

## ST3TKS4 Air/Oil Tank Side Taped Mount

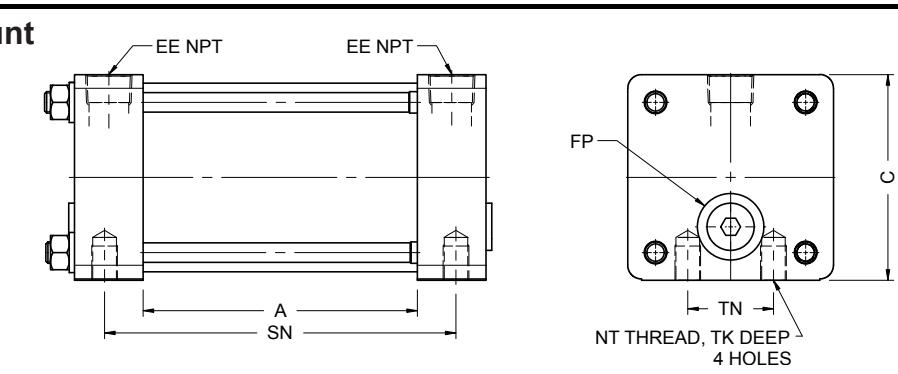

## ST3TKS4-A Air Tank Side Taped Mount

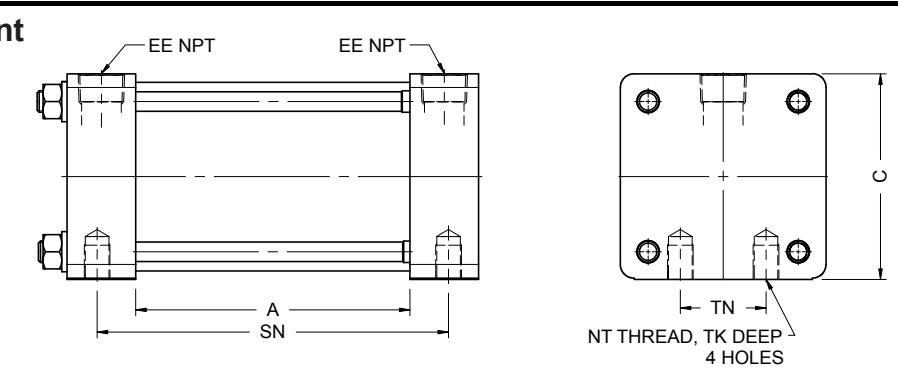

## ST3TKS1-A Air Tank Angle Mount

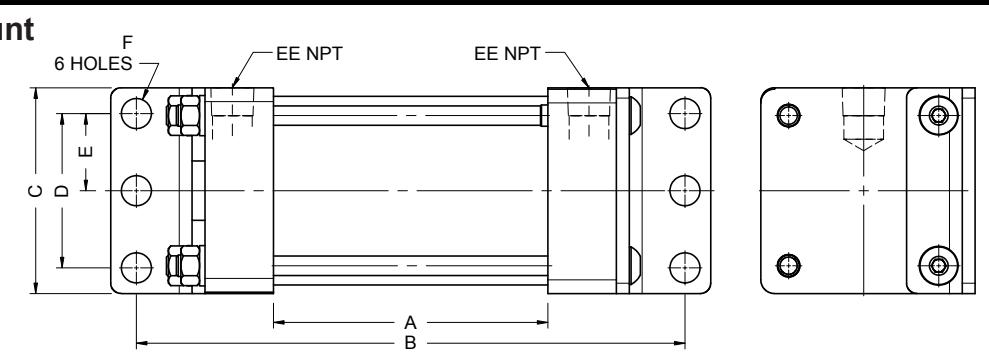


Table 1 - Envelope and Mounting Dimensions

| BORE | AREA  | VOLUME<br>GALS PER INCH<br>OF TANK | ADD LENGTH |       |       | TANK DIMENSIONS |       |        |       |     |         |        |       |
|------|-------|------------------------------------|------------|-------|-------|-----------------|-------|--------|-------|-----|---------|--------|-------|
|      |       |                                    | A          | B     | SN    | C               | D     | E      | F     | EE  | TN      | NT     | TK    |
| 2.50 | 4.90  | 0.0213                             | 0          | 4     | 1 1/8 | 3               | 2 1/4 | 1 1/8  | 7/16  | 3/8 | 1 1/4   | 3/8-16 | 5/8   |
| 3.25 | 8.29  | 0.0359                             | 0          | 5     | 1 3/8 | 3 3/4           | 2 3/4 | 1 3/8  | 9/16  | 1/2 | 1 1/2   | 1/2-13 | 3/4   |
| 4.00 | 12.56 | 0.0544                             | 0          | 5     | 1 3/8 | 4 1/2           | 3 1/2 | 1 3/4  | 9/16  | 1/2 | 2 1/16  | 1/2-13 | 3/4   |
| 5.00 | 19.64 | 0.0850                             | 0          | 5 1/4 | 1 3/8 | 5 1/2           | 4 1/4 | 2 1/8  | 11/16 | 1/2 | 2 11/16 | 5/8-11 | 1     |
| 6.00 | 28.00 | 0.1224                             | 0          | 5 3/4 | 1 5/8 | 6 1/2           | 5 1/4 | 2 5/8  | 13/16 | 3/4 | 3 1/4   | 3/4-10 | 1 1/8 |
| 8.00 | 50.26 | 0.2175                             | 0          | 6 5/8 | 1 5/8 | 8 1/2           | 7 1/8 | 3 9/16 | 13/16 | 3/4 | 4 1/2   | 3/4-10 | 1 1/8 |

HOW TO ORDER : Just use the internal length as suffix to the part number

Ex: ST3TKS1-2.5X10. Min Internal length (A) with Baffles: 3"



Page 39

# STAR3 CYLINDERS

## ALIGNMENT COUPLER

### Linear Alignment Couplers

**Starcyl's linear alignment couplers** extend the bearing and seal life of your cylinders. Our couplers prevent binding and erratic movement that misalignment causes, which eventually wears down your cylinders. Not only do Starcyl couplers work equally well in "push" and "pull" applications, but they allow a greater tolerance between the cylinder center line and the mating member.

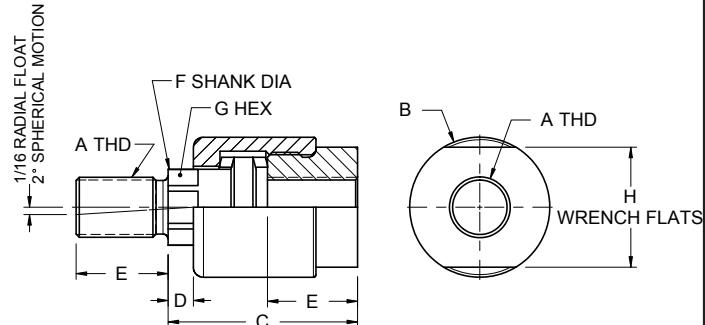

### AC Alignment coupler - Light Duty

\* Use jam nut to lock coupler to rod when used with full diameter threads.

| Part #   | A        | B     | C      | D     | E     | F     | G     | H     | MAX PULL AT YIELD |
|----------|----------|-------|--------|-------|-------|-------|-------|-------|-------------------|
| AC-0250F | 1/4-28   | 7/8   | 1 1/4  | 1/4   | 5/8   | 0.245 | 3/16  | 13/16 | 6000              |
| AC-0312F | 5/16-24  | 7/8   | 1 1/4  | 1/4   | 5/8   | 0.308 | 1/4   | 13/16 | 8300              |
| AC-0375C | 3/8-16   | 7/8   | 1 1/4  | 1/4   | 5/8   | 0.369 | 5/16  | 13/16 | 5000              |
| AC-0375F | 3/8-24   | 7/8   | 1 1/4  | 1/4   | 5/8   | 0.370 | 5/16  | 13/16 | 8300              |
| AC-0437F | 7/16-20  | 1 1/4 | 2      | 1/2   | 3/4   | 5/8   | 9/16  | 1 1/8 | 10000             |
| AC-0500C | 1/2-13   | 1 1/4 | 2      | 1/2   | 3/4   | 5/8   | 9/16  | 1 1/8 | 14000             |
| AC-0500F | 1/2-20   | 1 1/4 | 2      | 1/2   | 3/4   | 5/8   | 9/16  | 1 1/8 | 14000             |
| AC-0625F | 5/8-18   | 1 1/4 | 2      | 1/2   | 3/4   | 5/8   | 1/2   | 1 1/8 | 14000             |
| AC-0750C | 3/4-10   | 1 3/4 | 2 5/16 | 5/16  | 1 1/8 | 31/32 | 7/8   | 1 1/2 | 34000             |
| AC-0750F | 3/4-16   | 1 3/4 | 2 5/16 | 5/16  | 1 1/8 | 31/32 | 7/8   | 1 1/2 | 34000             |
| AC-0875F | 7/8-14   | 1 3/4 | 2 5/16 | 5/16  | 1 1/8 | 31/32 | 7/8   | 1 1/2 | 34000             |
| AC-1500F | 1 1/2-12 | 3 1/4 | 4 3/8  | 13/16 | 2 1/4 | 1 3/4 | 1 1/2 | 3     | 134000            |
| AC-1750F | 1 3/4-12 | 3 1/4 | 4 3/8  | 13/16 | 2 1/4 | 1 3/4 | 1 1/2 | 3     | 134000            |
| AC-1875F | 1 7/8-12 | 3 3/4 | 5 7/16 | 11/16 | 3     | 2 1/4 | 1 7/8 | 3 1/2 | 240000            |
| AC-200F  | 2-12     | 3 3/4 | 5 7/16 | 11/16 | 3     | 2 1/4 | 1 7/8 | 3 1/2 | 240000            |

### AC Alignment coupler - Medium Duty

Same load rating - push or pull. Total of 7.5 degrees Spherical Movement and 1/8" lateral movement capabilities. Manufacture from hight tensile strength and Starnite for reduce Friction and Corrosion.

| Part #   | A        | B     | C       | D   | E     | F     | G     | H     | MAX RATED LOAD | MAX PULL AT YIELD |
|----------|----------|-------|---------|-----|-------|-------|-------|-------|----------------|-------------------|
| AC-1000C | 1-8      | 3 1/8 | 2 15/16 | 1/2 | 1 5/8 | 1 3/8 | 1 1/4 | 2 1/4 | 19425          | 77700             |
| AC-1000F | 1-14     | 3 1/8 | 2 15/16 | 1/2 | 1 5/8 | 1 3/8 | 1 1/4 | 2 1/4 | 19425          | 77700             |
| AC-1250F | 1 1/4-12 | 3 1/8 | 2 15/16 | 1/2 | 1 5/8 | 1 3/8 | 1 1/4 | 2 1/4 | 30820          | 120000            |
| AC-1375F | 1 3/8-12 | 3 1/8 | 2 15/16 | 1/2 | 1 5/8 | 1 3/8 | 1 1/4 | 2 1/4 | 30820          | 120000            |


### AC Alignment coupler - Heavy Duty

Total of 10 degrees of Spherical Movement in push or pull. Total of 1/8" Lateral Movement


Eliminates need for custom designing. Simplifies cylinder installation. Increases design tolerances. Cuts cylinder repairs. Increases cylinder life. Easier on seals, wiper, bearing surfaces and cushion parts. Compensates for machinery deflection and cuts bearing wear from side loads and binding.

Allows equally effective angular or lateral displacement in either direction, push or pull.

Manufacture from hight tensile strength and Starnite for reduce Friction and Corrosion. Inside parts Assemble with High Strength Butress Thread.

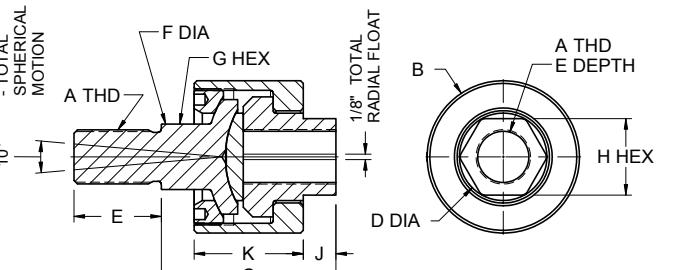

| Part #    | A          | B                | C        | D               | E             | F                 | G           | H          | Max Rated Load | Max Pull at Yield |
|-----------|------------|------------------|----------|-----------------|---------------|-------------------|-------------|------------|----------------|-------------------|
|           | Rod Thread | Outside diameter | Body dim | Female diameter | Thread length | Male rod diameter | hex rod end | Hex Female |                |                   |
| AC-1250HD | 1 1/4-12   | 3 1/2            | 4        | 1 1/2           | 2             | 1 1/2             | 1 1/4       | 2 1/4      | 30825          | 123300            |
| AC-1500HD | 1 1/2-12   | 4                | 4 3/8    | 2               | 2 1/4         | 1 3/4             | 1 1/2       | 3          | 45750          | 183000            |
| AC-1750HD | 1 3/4-12   | 4                | 4 3/8    | 2               | 2 1/4         | 2                 | 1 1/2       | 3          | 58350          | 233400            |
| AC-1875HD | 1 7/8-12   | 5                | 5 7/8    | 3               | 3             | 2 1/4             | 2           | 3 1/2      | 67550          | 270200            |
| AC-2000HD | 2-12       | 5                | 5 7/8    | 3               | 3             | 2 1/4             | 2           | 3 1/2      | 77450          | 309800            |
| AC-2250HD | 2 1/4-12   | 6 3/4            | 6 3/8    | 3 1/4           | 3 1/2         | 2 3/4             | 2 3/8       |            | 99250          | 397000            |
| AC-2500HD | 2 1/2-12   | 7                | 6 1/2    | 4               | 3 1/2         | 3 1/4             | 2 7/8       |            | 123750         | 495000            |
| AC-2750HD | 2 3/4-12   | 7                | 6 1/2    | 4               | 3 1/2         | 3 1/4             | 2 7/8       |            | 150950         | 603800            |
| AC-3000HD | 3-12       | 7                | 6 1/2    | 4               | 3 1/2         | 3 1/4             | 2 7/8       |            | 180850         | 723400            |
| AC-3250HD | 3 1/4-12   | 9 1/4            | 8 1/2    | 5 1/4           | 4 1/2         | 4                 | 3 3/8       |            | 213450         | 853800            |
| AC-4500HD | 4 1/2-12   | 12 7/8           | 11 1/4   | 7 3/4           | 4 1/2         | 5 1/2             | 4 7/8       |            | 370850         | 1483400           |

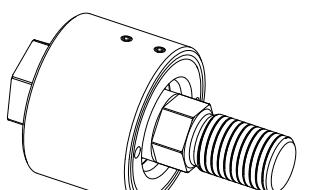

STARCYL CYLINDER CORP

20 Ron Joye Road, Hemingway  
South Carolina, 29554  
1-877-STARCYL (782-7295)  
www.Starcyl.com


STARCYL CANADA INC

2340 Michelin Street, Laval  
Quebec, Canada, H7L 5C3  
1-877-STARCYL (782-7295)  
www.Starcyl.ca

# STAR3 CYLINDERS


## ACCESSORIES

### NFPA CLEVIS BRACKET

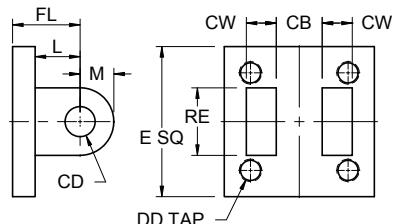

| Part # | CB    | CD PIN DIA. | CW    | DD     | E     | FL    | L     | M     | RE      | USED WITH MP4 |
|--------|-------|-------------|-------|--------|-------|-------|-------|-------|---------|---------------|
| CB-05  | .765  | 1/2         | 1/2   | 3/8-24 | 2 1/2 | 1 1/8 | 3/4   | 1/2   | 1 5/8   | 1.5, 2 & 2.5  |
| CB-07  | 1.265 | 3/4         | 5/8   | 1/2-20 | 3 1/2 | 1 7/8 | 1 1/4 | 3/4   | 2 9/16  | 3.25, 4 & 5   |
| CB-10  | 1.515 | 1           | 3/4   | 5/8-18 | 4 1/2 | 2 1/4 | 1 1/2 | 1     | 3 1/4   | 6, 7 & 8      |
| CB-13  | 2.032 | 1 3/8       | 1     | 5/8-18 | 5     | 3     | 2 1/8 | 1 3/8 | 3 13/16 | 8, 10 & 12    |
| CB-17  | 2.531 | 1 3/4       | 1 1/4 | 7/8-14 | 6 1/2 | 3 1/8 | 2 1/4 | 1 3/4 | 4 15/16 | 10 & 12       |


### NFPA EYE BRACKET

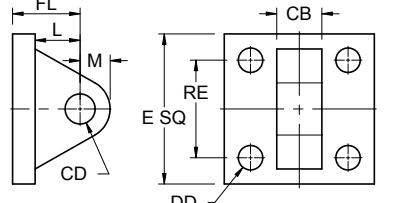

| Part # | CB   | CD PIN DIA. | DD    | E     | FL    | L     | M       | RE     | USED WITH MP1 & MP2 |
|--------|------|-------------|-------|-------|-------|-------|---------|--------|---------------------|
| EB-05  | .750 | 1/2         | 13/32 | 2 1/2 | 1 1/8 | 3/4   | 1/2     | 1 5/8  | 1.5, 2 & 2.5        |
| EB-07  | 1.25 | 3/4         | 17/32 | 3 1/2 | 1 7/8 | 1 1/4 | 3/4     | 2 9/16 | 3.25, 4 & 5         |
| EB-10  | 1.50 | 1           | 21/32 | 4 1/2 | 2 1/4 | 1 1/2 | 1       | 3 1/4  | 6, 7 & 8            |
| EB-13  | 2.00 | 1 3/8       | 21/32 | 5     | 3     | 2 1/8 | 1 3/8</ |        |                     |

# STAR3 CYLINDERS

## ROD DIA. AND STOP TUBE SELECTION

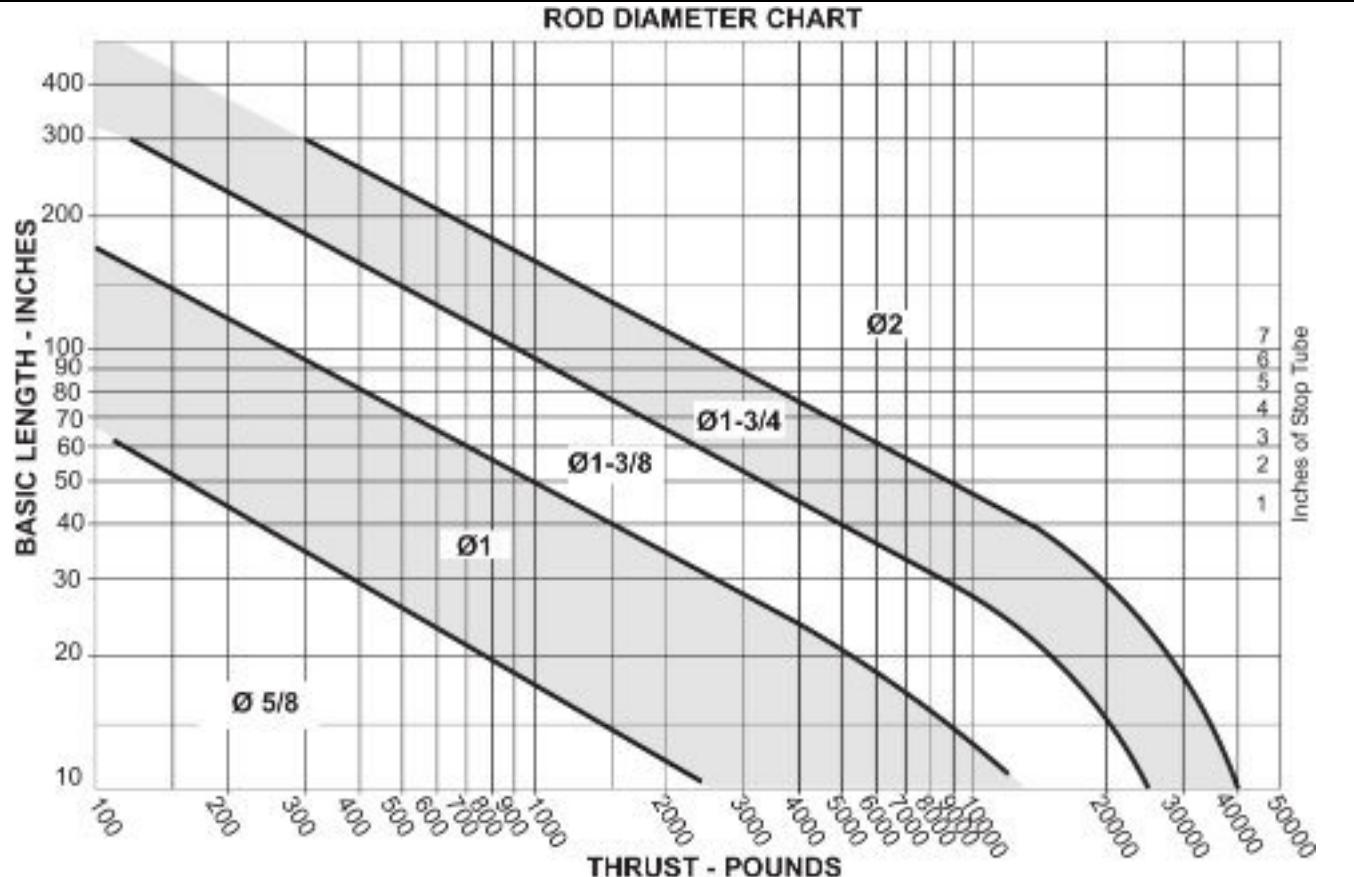

## ROD SIZE SELECTION

To determine the minimum recommended piston rod dia for your application:

1) Determine the cylinder thrust using the force volume chart. (Page 4) (Thrust equals bore area multiplied by the operating pressure.)

2) Select from the diagram beside the type of mounting you will use.

3) Determine the basic length by multiplying the real stroke by the stroke factor.

4) Enter the graph along the values of "basic length" and "Thrust".

The stripe within which these lines intersect represents the minimum recommended piston rod diameter.

## STOP TUBE SELECTION

Stop tubes are installed between the piston and the head on long stroke cylinders to reduce the load on the bearing. That, in turn, reduces bearing wear and tendency to buckle.

To determine if a stop tube is required and, if so, its length, first determine the "basic length" from the diagram . Step 1, 2 & 3 of The Rod Selection.

If the "basic length" is less than 40", no stop tube is needed. If its over than 40", a one-inch stop tube is recommended for every 10" (or fraction thereof) over 40"

See Page 52 on Stop Tube Option and how to Order

| MOUNTING STYLE   | ROD END CONNECTION  | STROKE FACTOR                |
|--|---|------------------------------|
| <b>Center line Mounting</b><br>Centerline mounting places the mounting bolts in simple shear or simple tension so that the mechanism is protected from compound forces. Centerline mounting is a rigid mounting style and this requires accurate cylinder alignment to prevent damage to the cylinder working parts. Mountings are : MX1, MX2, MX3, MF1, MF2, ME3, ME4.  | Fixed & Rigidly Guided  | 0.50                         |
|  | Pivoted & Rigidly Guided  | 0.70                         |
| <b>Foot Mounting</b><br>Foot mounting secures the cylinder along its side. Since the mounting surface plane is thus not centered directly on the line of force, the mounting bolts are subjected to a significant amount of shear stress. Because foot mounts are rigid, they require accurate cylinder alignment. Mountings are : MS1, MS2, MS4, MS7.   | Supported but not Rigidly Guided  | 2.00                         |
|  | Unsupported   | 4.00                         |
| <b>Pivot Mounting</b><br>Pivot mounting is used when the cylinder must pivot during piston motion. Clevis and Trunnion mounts are two methods used to allow this motion. The Clevis end design locates the pivot point at the cap end of the cylinder. Trunnion mounting uses the head or the cap of the cylinder to allow it to pivot at any of the two locations. The Mountings are: MP1, MP2, MP4, MT1, MT2, MT4. | MT1 TRUNNION ON HEAD END<br>MT4 INTERMEDIATE TRUNNION<br>MT2 TRUNNION ON CAP END<br>MP1, MP2, MP4 CLEVIS ON CAP | 1.00<br>1.50<br>2.00<br>2.00 |



STARCYL CYLINDER CORP  
20 Ron Joye Road, Hemingway  
South Carolina, 29554  
1-877-STARCYL (782-7295)  
www.Starcyl.com

STARCYL CANADA INC  
2340 Michelin Street, Laval  
Quebec, Canada, H7L 5C3  
1-877-STARCYL (782-7295)  
www.Starcyl.ca

# STAR3 CYLINDERS

## OPTIONS 1

### Stop Tube Design

#### Stop Tube

Option Code ST(\_)

Enhances the transverse load carrying capability of a long stroke cylinder by increasing the distance between the piston and the rod bearing at full extension when placed on head end. Ideal for applications requiring longer strokes or where additional rod stability is desired. Specify stop tube length when ordering.

Starcyl supplies two types of stop tubes for air cylinders:

### Stx.xx Option

A cylinder requiring a stop tube under two inches uses a spacer only and only non cushion STxx Option.

For This Stop tube use ST and replace XX by the value


EX: ST1 meaning 1" stop tube

The Net stroke of the cylinder will always be the Actual distance the rod travel. Gross stroke will be the envelope stroke.



### STDx.xx Option

A cylinder with over two inches of stop tube, cushioned or not, utilizes dual piston construction STD(\_) option for added bearing surface as well increasing distance between bearings.

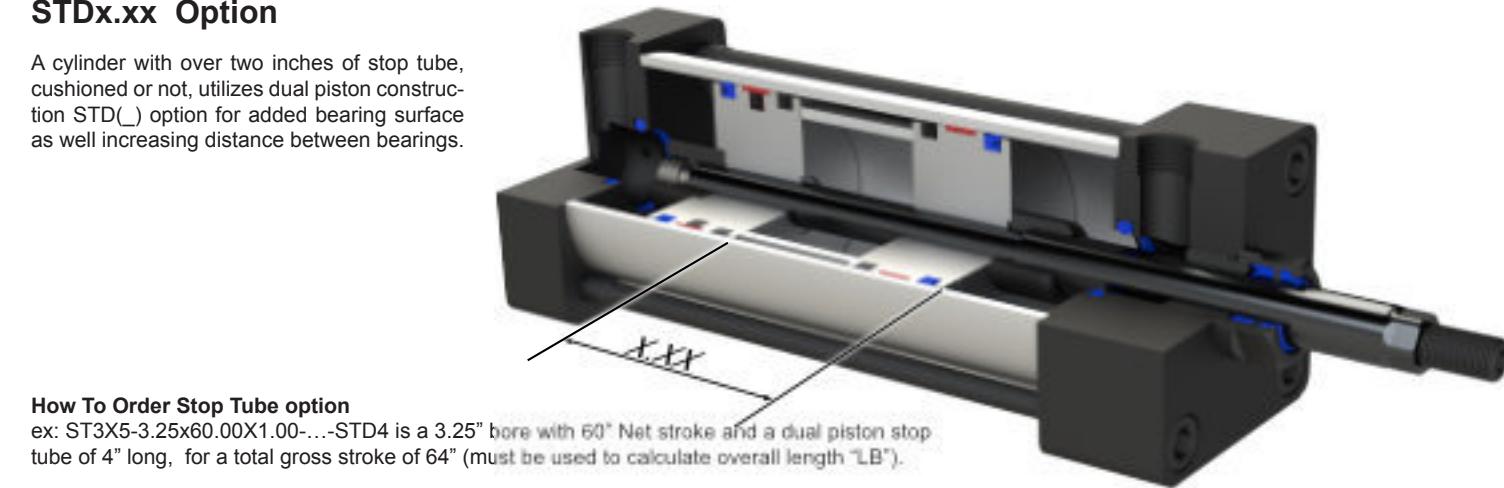

#### How To Order Stop Tube option

ex: ST3X5-3.25x60.00X1.00---STD4 is a 3.25" bore with 60" Net stroke and a dual piston stop tube of 4" long, for a total gross stroke of 64" (must be used to calculate overall length "LB").

### Non Rotating Internal

Option code NRI

Available from 2" through 12" bore.

Design with one or two Guide Rods internally, keeps all external dimensions the same.

Application like Pick and place, Clamping, Marking, Pressing.

(IR option not available with this option)




| NRI GUIDE ROD SIZES AND MAX STROKE |                 |           |               |            |
|------------------------------------|-----------------|-----------|---------------|------------|
| BORE                               | ROD DIA.        | CUSHIONS  | GUIDE ROD DIA | MAX STROKE |
| 2                                  | 5/8 standard    | N/A       | .250          | 10"        |
| 2.5                                | 5/8 standard    | N/A       | .312          | 12"        |
|                                    | 1" oversize     | N/A       | .312          | 12"        |
| 3.25                               | 1" Standard     | Available | .375          | 18"        |
|                                    | 1 3/8" Oversize | Cap Only  | .375          | 18"        |
| 4                                  | 1" Standard     | Available | .625          | 30"        |
|                                    | 1 3/8" Oversize |           | .625          | 30"        |
| 5                                  | 1" Standard     | Available | .625          | 30"        |
|                                    | 1 3/8" Oversize |           | .625          | 30"        |
| 6                                  | 1 3/8" Standard | Available | .625          | 30"        |
|                                    | 1 3/4" Oversize |           | .625          | 30"        |
| 8                                  | 1 3/8" Standard | Available | 1.000         | 40"        |
|                                    | 1 3/4" Oversize |           | 1.000         | 40"        |
| 10                                 | 1 3/4" Standard | Available | 1.000         | 40"        |
|                                    | 2" Oversize     |           | 1.000         | 40"        |
| 12                                 | 2" Standard     | Available | 1.000         | 40"        |
|                                    | 2 1/2" Oversize |           | 1.000         | 40"        |

# STAR3 CYLINDERS

## OPTIONS 2

### Thread Extension


Option code Ax.xx  
Piston Rod Thread Extension can be ordered over standard.  
To order add option code A=(\_ ) and specify "A" length  
Ex: ST3-3.25X4-A=2 will have an additional 7/8" to the standard 1-1/8" thread length.

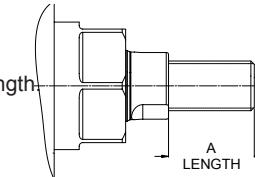

### Rod Extension

Option code Cx.xx

Piston Rod Extension can be ordered over standard.  
To order add option code C=(\_ ) and specify "C" length  
Ex: ST3-3.25X4-C=1.5 will have an additional 1" to the standard C=1/2".




### Port & Adjustable Cushion Location

Option code N081N081C22

Specify size for Head and Cap  
N for NPT 08 for 1/2" and location,  
Nxx1Nxx1C22 default,


Non Cushion use C00

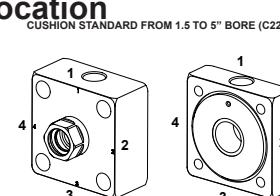

### Magnetic Piston

Option Code M

When position sensing of the cylinder is required, a Magnetic Ring Must be added.  
The Magnetic ring is placed at the center of the piston under the wear band. The magnetic band will create a magnetic field which will actuate the sensor.



### Non Adjustable Cushion

Option Code CNN

Mostly use with the "PBS" Bumper seals option, this option consist of removing the two needle valves and a bigger orifice for air escaping by the port when piston spud is sealing the cushion seal.

Use this option also to avoid people to play with adjustment of the needle valve cushion that can change the cycle of the machine.


### Metallic Rod Scraper

Option RSB or RSV

Aggressively Scrapes the exposed portion of the piston rod free of weld splatter, paint spray, abrasive powders or many other foreign materials that could damage the rod seal.

RSB = Rod Scraper with Buna Expander


RSV = Rod Scraper with Fluorocarbon Expander



### Adjustable Stroke

Option Code ASU(\_)

Provides variable reduction of the retract stroke and serves as a positive stop for the cylinder piston. Consist of a threaded stud located in the cap end of the cylinder. Socket head cap screw Loctite at the end of the adjustment stud allow simple yet precise positioning to accommodate varying retract stroke requirements. Must specify adjustment stroke length. Ex: -ASU1.5

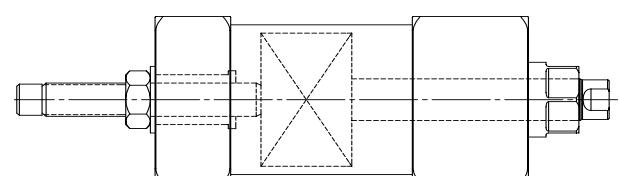


### Double rod Adjustable Stroke (Extend)

Option Code ASE(\_)

Consist of a double rod cylinder and a adjustable stop collar. Used to adjust the extend cylinder stroke. Stroke up to 120" available. (Adjustments to 12" available)

To order, Specify ASE and length adjustment.

Ex: ASE4 = 4" of adjustment

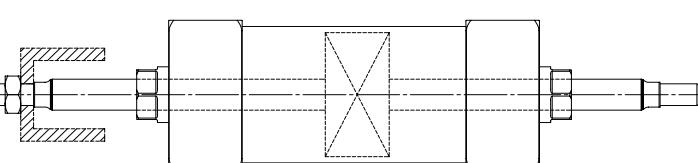


### Adjustable Mid Stroke

Option Code ASM(\_)

Design similar to the option ASE, this option consist of a 3 position cylinder with a double piston design that allow adjustment of the mid stroke position. Cylinder with three port and an adjustable collar.

To order, Specify ASM and length adjustment.

Ex: ASM4 = 4" of adjustment

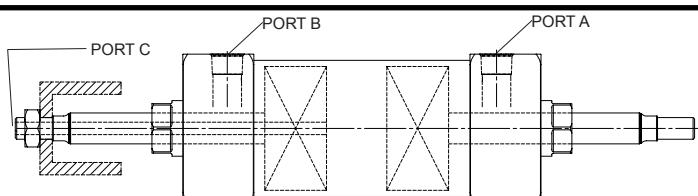


### Combination of Mounting

Combination mount part numbers can be constructed by adding a Slash (/) between the desired mounts in the part number.

Example: 5" Bore with 12" Stroke, Head and Cap Cushions, Magnetic Piston and having an MS2E and MP2 Mount:

Part Number: ST3S2E/P2-5.00X12.00X1.00.....

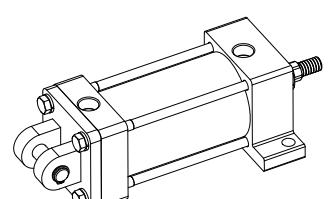

# STAR3 CYLINDERS

## OPTIONS 3

### Fluorocarbon Piston Seals

Option code PLV

Fluorocarbon will be chosen for higher temperature range from 200°F to 400°F (200°C)

For Chemical resistance our standard Blue Seals will Out-stand Fluorocarbon by far in most chemical Application and wear resistance. Resists most wash down application.

### Fluorocarbon Rod Seal

Option code RLV

Fluorocarbon will be chosen for higher temperature range from 200°F to 400°F (200°C)

For Chemical resistance our standard Blue Seals will Out-stand Fluorocarbon by far in most chemical Application and wear resistance. Resists most wash down application.

### Aluminum Tubing 6063-T5

Option code -T1

Default do not need to add on part Number

### Starnite Steel Tubing

Option code -T0

For applications requiring a cylinder that can withstand higher side loading, resistance to denting. Starcyl has offered Steel Tubing for years in the Lumber, Mine and other industries that typically used 100% all steel Cylinders.

(Hydraulic grade steel tubing honed with StarNite ID and OD Corrosion Resistant with a hard layer on the ID and OD for wear resistance. ( magnet option not available)

### Stainless Steel Tubing ( SS316)

Option code -T7

For applications requiring a Corrosion proof to chemical. (magnet still available)

### Steel Tubing Chromed ID

Option code -T8

For applications requiring a standard steel tube cylinder with a Chromed layer inside the tubing to avoid corrosion. ( magnet option not available)

### Composite Tubing

Option code -T3

For applications requiring a light weight and still resistant Tubing. And cost effective in bigger bore (magnet still available)

### Hard Chrome Steed Rod

Option Code R1

For Quick delivery, and price competitiveness.

### Induction Hard Chrome Steed Rod

Option Code R2

To use with Rod Lock Applications

### Stainless Steel Rod Chromed plated 303/304

Option Code S1

For applications requiring an Extreme Corrosion proof to chemical.

### Stainless Steel Rod Chromed plated 17-4 PH

Option Code S2

For applications requiring a Corrosion proof to chemical and Hardness for Rod Lock applications.

### Under Size Port

Option code N02, N04, N06, N08, N12, N16

N02 = 1/8 NPT,

N04 = 1/4 NPT,

N06 = 3/8 NPT,

N08 = 1/2 NPT,

N12 = 3/4 NPT/

You can order cylinder with undersized port, require longer lead time if not in stock.

### Stainless Steel Rod Chromed plated 316

Option Code S3

For applications requiring an Extreme Corrosion proof to chemical.

### Stainless Steel Tie rods

Option Code SST

Stainless Tie rods, Available in stainless 303/304

### Tie Rods Support

Option code TS

To Avoid rods waving on long stroke, we add a tie rods support to keep them straight and easier to Torque. Usually from 1.5 to 6" bore, starting at 60" stroke +

### Hydraulic 400 PSI Non shock

Model Code ST3.....PLBRHU

Select those seals to make it hydraulic

By changing some of the seals the Aluminum Construction cylinder will be able to operate in hydraulic low pressure. (Non Cushion Only)



STARCYL CYLINDER CORP

20 Ron Joye Road, Hemingway  
South Carolina, 29554  
1-877-STARCYL (782-7295)  
www.Starcyl.com

STARCYL CANADA INC

2340 Michelin Street, Laval  
Quebec, Canada, H7L 5C3  
1-877-STARCYL (782-7295)  
www.Starcyl.ca

# STAR3 CYLINDERS

## SWITCHES

**Reed switches** are constructed of two overlapping ferromagnetic reeds which are sealed in a glass tube with the ends aligned and a small gap between them. When an external magnetic force is applied, the reed assumes opposite polarity, the ends of the reeds attract each other and make contact, completing the circuit. Reed switches are not recommended in sensitive areas since they can introduce electrical noise into the circuit due to bounce and vibration from mechanical closing of the reeds.

**Hall Effect switches** are solid state switches with no moving parts. The solid state switches is activated when the silicon chip (Hall) senses a magnetic field. Since there are no moving parts, Hall effect switches can operate in sensitive areas without sending interference or noise into the circuit.

## Switch specifications

| Switch part Number          | 862-004   | 862-33  | 862-33   |
|-----------------------------|---|---|--|
| Spec                        | Reed switch, MOV, LED                           | Electronic Sensor, LED, Sourcing - Load dependent | Electronic Sensor, LED, Sinking - Load dependent |
| Cable Length                | 9 ft PVC Cable                                  |   |  |
| Max operating Voltage       | 120 AC/DC                                       | 5-30 VDC  | 5-30 VDC   |
| Switching Current           | 5 to 500 mA                                     | 100 mAmp Max                                      | 0.5 Amp Max                                      |
| Switching Power             | 10 Watts Max.                                   | 3 Watts Max.                                      | 12 Watts Max.                                    |
| Switching Speed             | 0.5 µs operate<br>0.1 µs release                | 1.5 µs operate<br>0.5 µs release                  | 0.5 µs operate<br>0.1 µs release                 |
| Voltage Drop                | 3.5 Volts                                       | 0.6 Volts   | 1.0 Volts  |
| Operating Temperature Range | -10° to 70°C (14° to 158°F)                     |   |  |
| Switch Function             | Normally Open                                   | Normally Open PNP output                          | Normally Open NPN output                         |
| Shock                       | Up to 30G (300 m/s <sup>2</sup> )               | Up to 50G (500 m/s <sup>2</sup> )                 | Up to 50G (500 m/s <sup>2</sup> )                |
| Vibration                   | 90 m/s <sup>2</sup> (9G) Double Amplitude 1.5mm | 90 m/s <sup>2</sup> (9G) Double Amplitude 1.5mm   | 90 m/s <sup>2</sup> (9G) Double Amplitude 1.5mm  |
| Ingress Protection***       | IP 69 K   |   |  |

\*\*IP Scale : Rating based on their ability to withstand the intrusion of solids and liquids, first number indicates how dustproof a product is, ranging from 0 to 6. The second number indicates how watertight a product is, ranging from 0 to 9. The addition of a 'K' after the second digit signifies specific protection from high-pressure jets. IP69K means a product is completely dustproof and can withstand washdown at pressures of 80 to 100 bar/1,160 to 1,450 PSI, in phases of 14 to 16 l/min, and at temperatures up to 176°F/80°C.

## How To Order

*Order Clamp Separately see below*

**862 - 04 - Q08**

| Series | Type Code                  | Connections                                 |
|--------|----------------------------|---|
| 862    | 04 - Reed switches         | 9ft PCV wire                                |
|        | 33 - Hall Effect PNP / NPN | Q08 - 8 mm Quick Connect with Pigtail (std) |

**Clamp**  
 862-ABC Tie Rod Clamp - Valid for 1.5" to 8" bore  
 862-AB0 Tie rod clamp valid for 1.5" to 4" bore only

### 862-ABC Clamp Style



### 862-AB0 Clamp Style




### Other Style Available




# STAR3 CYLINDERS

## END OF STROKE SENSOR READY

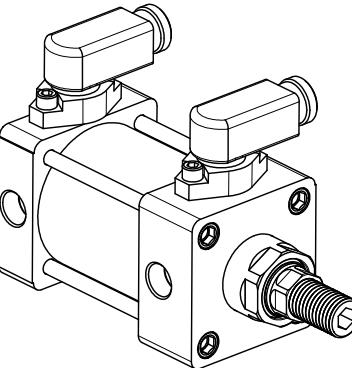

Option Code H

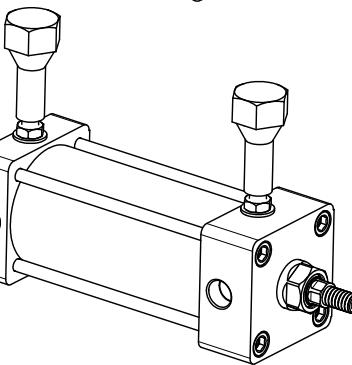

Option Code G

### END OF STROKE SENSOR PREP

#### How it Works

When the ferrous cushion of a cylinder enters the sensing area of the switch, it attracts the primary magnet, which pulls the connecting rod forward. As a result, the common contact snaps to its operated position, closing the other contact circuit. When the target is removed the common contact automatically returns to its original un-operated position.

#### Option Code H(xx) & GS(xx)

End of Stroke Sensors are simple and built to last. With only one moving part and no metal-to-metal contact forcing it to move, there is nothing to wear out!

Must Indicate Position.


Ex : H32 1<sup>st</sup> switch, Head end, will be in position 3. And 2<sup>nd</sup> switch, Cap end, will be in position 2

#### Options Available


- Explosion Proof
- SPDT or DPDT
- Hi Temp™ to 400°F
- Sub Sea™ Submersible
- Hermetically Sealed
- High Pressure to 10,000 psi
- English or metric threads

## Circuit & Connect Diagram Reed

**862-04**

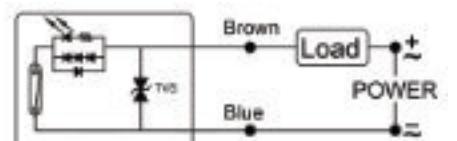

**862-04-Q08**

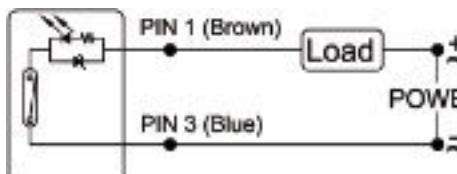


## Circuit & Connect Diagram Hall Effect

**862-33 and 862-33-Q08**



The Brown Wire to the + and the Blue Wire to the - from the DC Power  
The Black wire have to be connect to the load

## External Protect Circuit

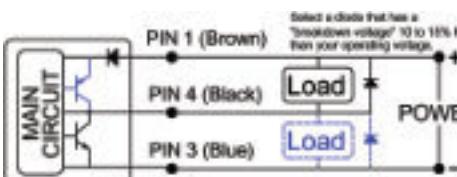

**Applicable to Conductive Load**  
 Attach an external diode between Brown + and Black (out) when NPN Connection  
 Attach an external diode between Blue - and Black (out) when PNP Connection


### WHAT IS A PNEUMATIC ROD LOCK?

Rod locks have been developed as a solution to control problems inherent to pneumatics such as overtravel drifting, bouncing, and reverse-traveling. A significant design feature of the rod locks includes the patented intensifier, a mechanically-operated mechanism that helps to guarantee quick and secure locking. The pneumatic series rod locks consist of an anodized aluminum housing with special piston and collet locking mechanism actuated by a spring that mechanically locks the rod. The rod is then unlocked when air actuates the piston, compressing the spring and releasing the collet locking mechanism. It is because of this design that the unit will lock in a situation presenting a loss of air pressure.

#### BENEFITS

- Precision holding (0.002-0.003 in)
- Consistent clamping force; holds loads during power/ Pressure loss
- High cycle rates and accuracy
- Compact unit, easy integration
- Works with a broad variety of applications
- Maximum operating pressure: 160 PSI Air (11bar)
- Required release pressure: 60 PSI Air (4 bar)
- Operating media: clean, dry, filtered, compressed air
- Operating temperatures:
  - Standard 10 deg F to 180 deg F (-12 deg C to 82 deg C)
  - Optional 10 deg F to 250 deg F (-12 deg C to 121deg C)
- Holding Force:
  - Axial holding forces were established after two million fatigue test cycles.
- Minimum linear movement may occur after clamp is fully engaged (0.002 in - 0.003 in)
- Holds with consistent force in both directions when rated values are not exceeded
- Can be mounted in any position
- Release pressure can range: 4-8 bar (60 PSI min - 120 PSI max)

### ANATOMY OF A PNEUMATIC ROD LOCK

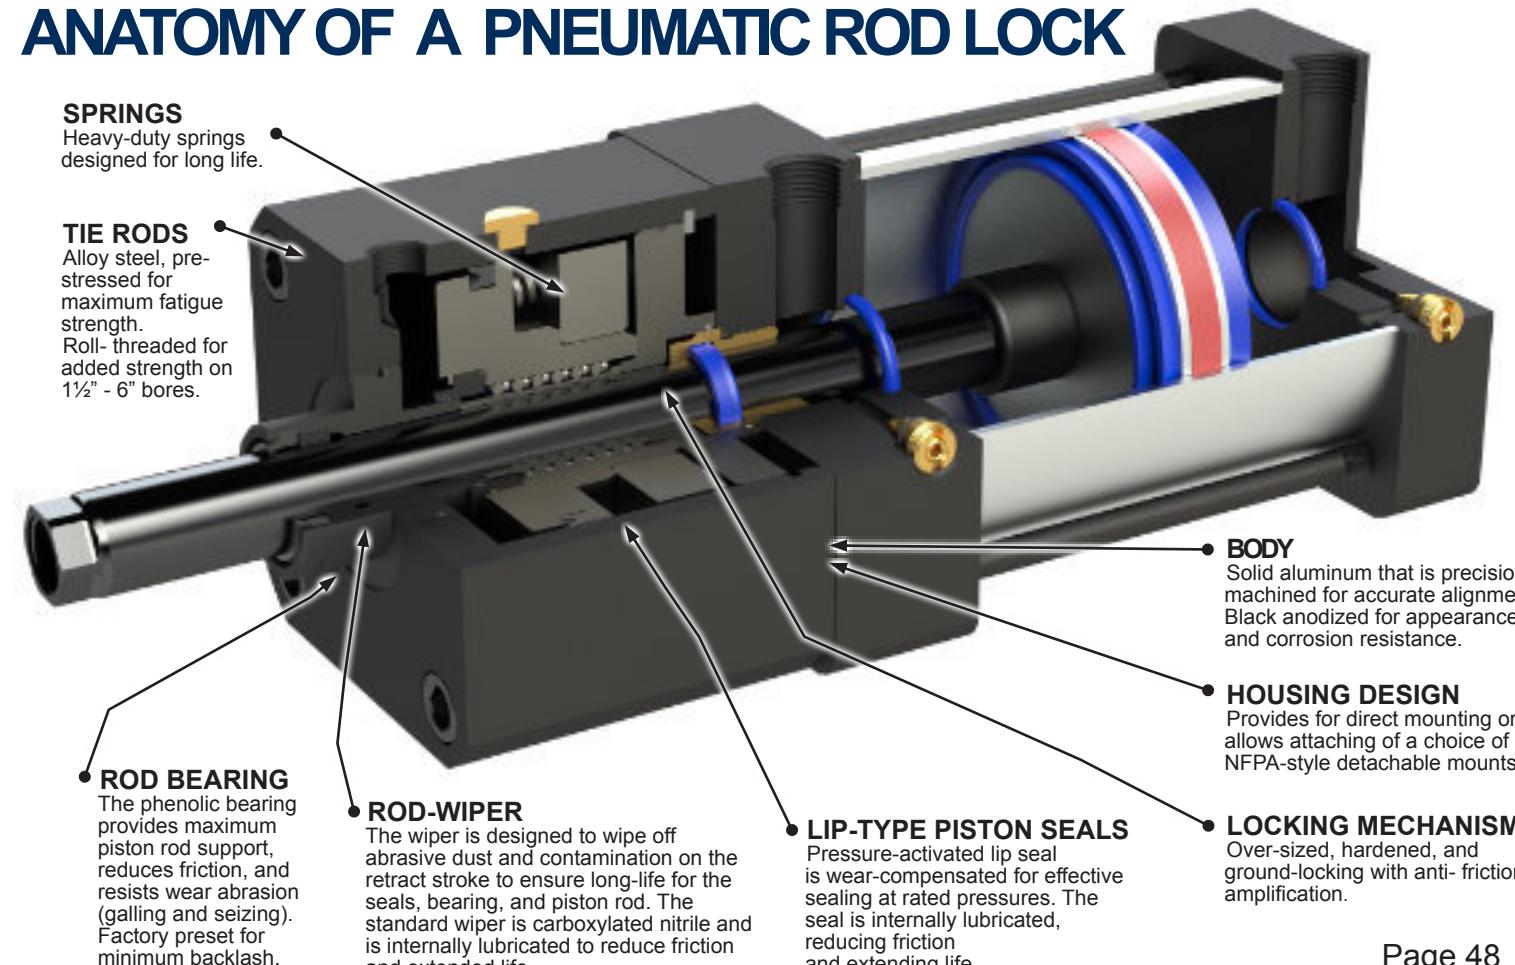

### SAFETY PNEUMATIC ROD LOCK?

#### Precision Operation Maintains Accurate Positioning

The RLS series of Rod Locks guarantees accurate positioning and provides precision holding while other operations are performed. The Rod Lock engages without causing any rod displacement, and also features low backlash making them ideal for precision applications.



#### Large Clamping Surface Ensures Consistent Performance

The RLS line is designed with a large clamping surface that provides uniform force to the rod contact area on every engagement. The clamping mechanism utilizes numerous ball bearings to reduce friction.

#### Spring-engaged Units Engage in Power-off Situations

Rod Locks are spring-engaged, so they operate even in power-off situations to promote safety for operators and machinery. Multiple springs ensure reliable performance and redundancy. The fast response time of these spring-engaged products also increases positioning accuracy. Rod Locks also feature locking mode sensing capability that allows engagement/ disengagement feedback with the use of up to two optional inductive sensors.

#### Sealed to Withstand Harsh Environments

Every RLS Rod Lock is sealed to protect internal components. These seals are designed to withstand even harsh wash-down environments and are IP67 rated (anodized models exceed NEMA 4X rating). Consult Factory for use in wash-down of humid environment applications. Rod Locks are black anodized coating.

#### Manual Release

The cam operated manual release feature mechanically disengages the rod lock with the simple turn of a hex screw using a standard wrench. The default-to-lock function springs back to the engaged position when released.


#### ROD LOCK CUTAWAY(WITH MANUAL RELEASE)

##### Manual Release Specifications

- Cam operated, default to the lock function
- No special tools needed for manual disengagement, uses standard size hex head
- Stainless steel disengagement screw
- Locking mode feedback sensor (optional)
- Tested and rated to 5,000 cycles

##### SAFETY RATING COMPLIANCE

Rod Locks are Safety Rated by Intertek® and available with Operating Mode Sensors to maximize machine safety and efficiency. Safety Rated Rod Locks are available with zero, one or two sensor slots. By using the operating mode sensor(s) for either Engagement or Disengagement, system manufacturer's are able to gain higher safety category ratings per ISO 13849-1. Rating of the safety function is the responsibility of the system manufacturer.

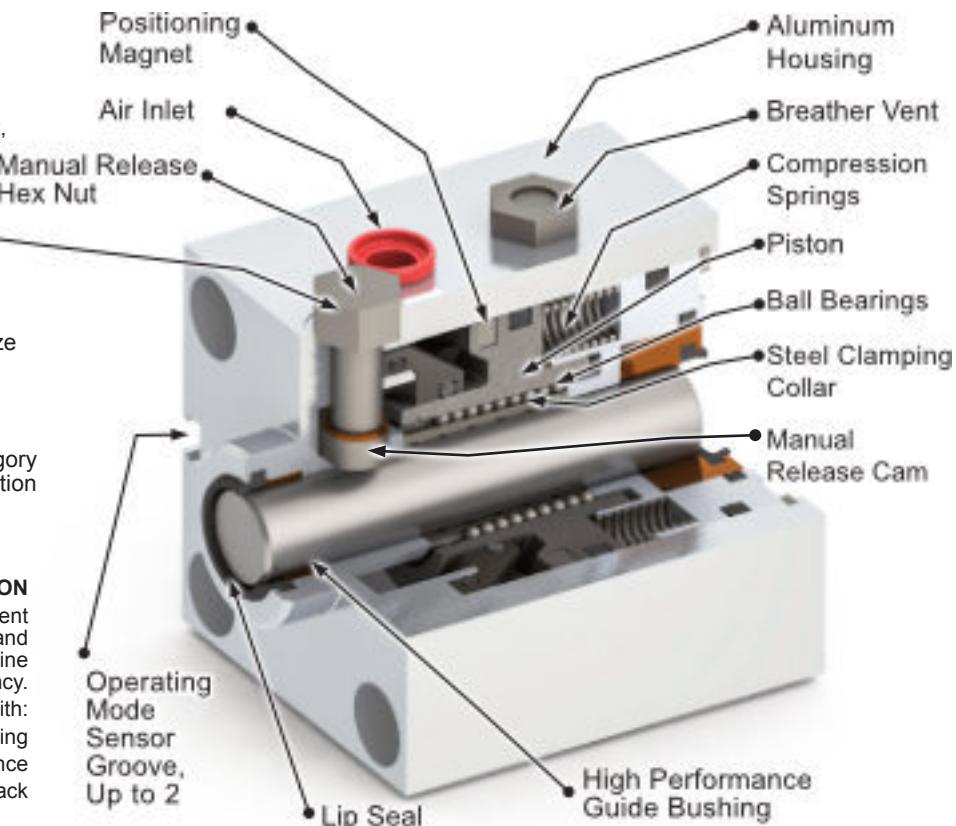

##### INDUSTRY 4.0 SOLUTION

Rod Lock Operating Mode Sensors for Engagement and Disengagement are Industry 4.0 compatible and can provide information to maximize machine efficiency.


Having this information available aides with:

- Accurate Linear Positioning
  - Predictive Maintenance
  - Operational Feedback

# STAR3 CYLINDERS

## STAR3 Mounting Kits

| BORE SIZE | Part number Suffix | MOUNTING KIT WEIGHT |          |          |          |          |          |          |             |             |
|-----------|--------------------|---------------------|----------|----------|----------|----------|----------|----------|-------------|-------------|
|           |                    | ST3MKP1-            | ST3MKP2- | ST3MKP4- | ST3MKS1- | ST3MKS2- | ST3MKSD- | ST3MKX1- | ST3MKX2/X3- | ST3MKF1/F2- |
| 1 1/2     | 1500               | 0.73                | 0.91     | 0.91     | 0.31     | 0.16     | 0.45     | 0.45     | 0.09        | 0.21        |
| 2         | 2000               | 1.03                | 1.26     | 1.26     | 0.43     | 0.21     | 0.58     | 0.58     | 0.14        | 0.36        |
| 2 1/2     | 2500               | 1.30                | 1.55     | 1.55     | 0.51     | 0.16     | 0.68     | 0.68     | 0.14        | 0.49        |
| 3 1/4     | 3250               | 3.41                | 4.08     | 4.08     | 0.85     | 0.38     | 1.87     | 1.87     | 0.25        | 1.17        |
| 4         | 4000               | 4.58                | 5.18     | 5.18     | 1.01     | 0.38     | 2.25     | 2.25     | 0.25        | 1.64        |
| 5         | 5000               | 6.64                | 7.17     | 7.17     | 2.06     | 2.68     | 3.11     | 3.11     | 0.56        | 2.58        |
| 6         | 6000               | 11.65               | 12.12    | 12.12    | 2.52     | 3.85     | 5.46     | 5.46     | 1.41        | 3.99        |

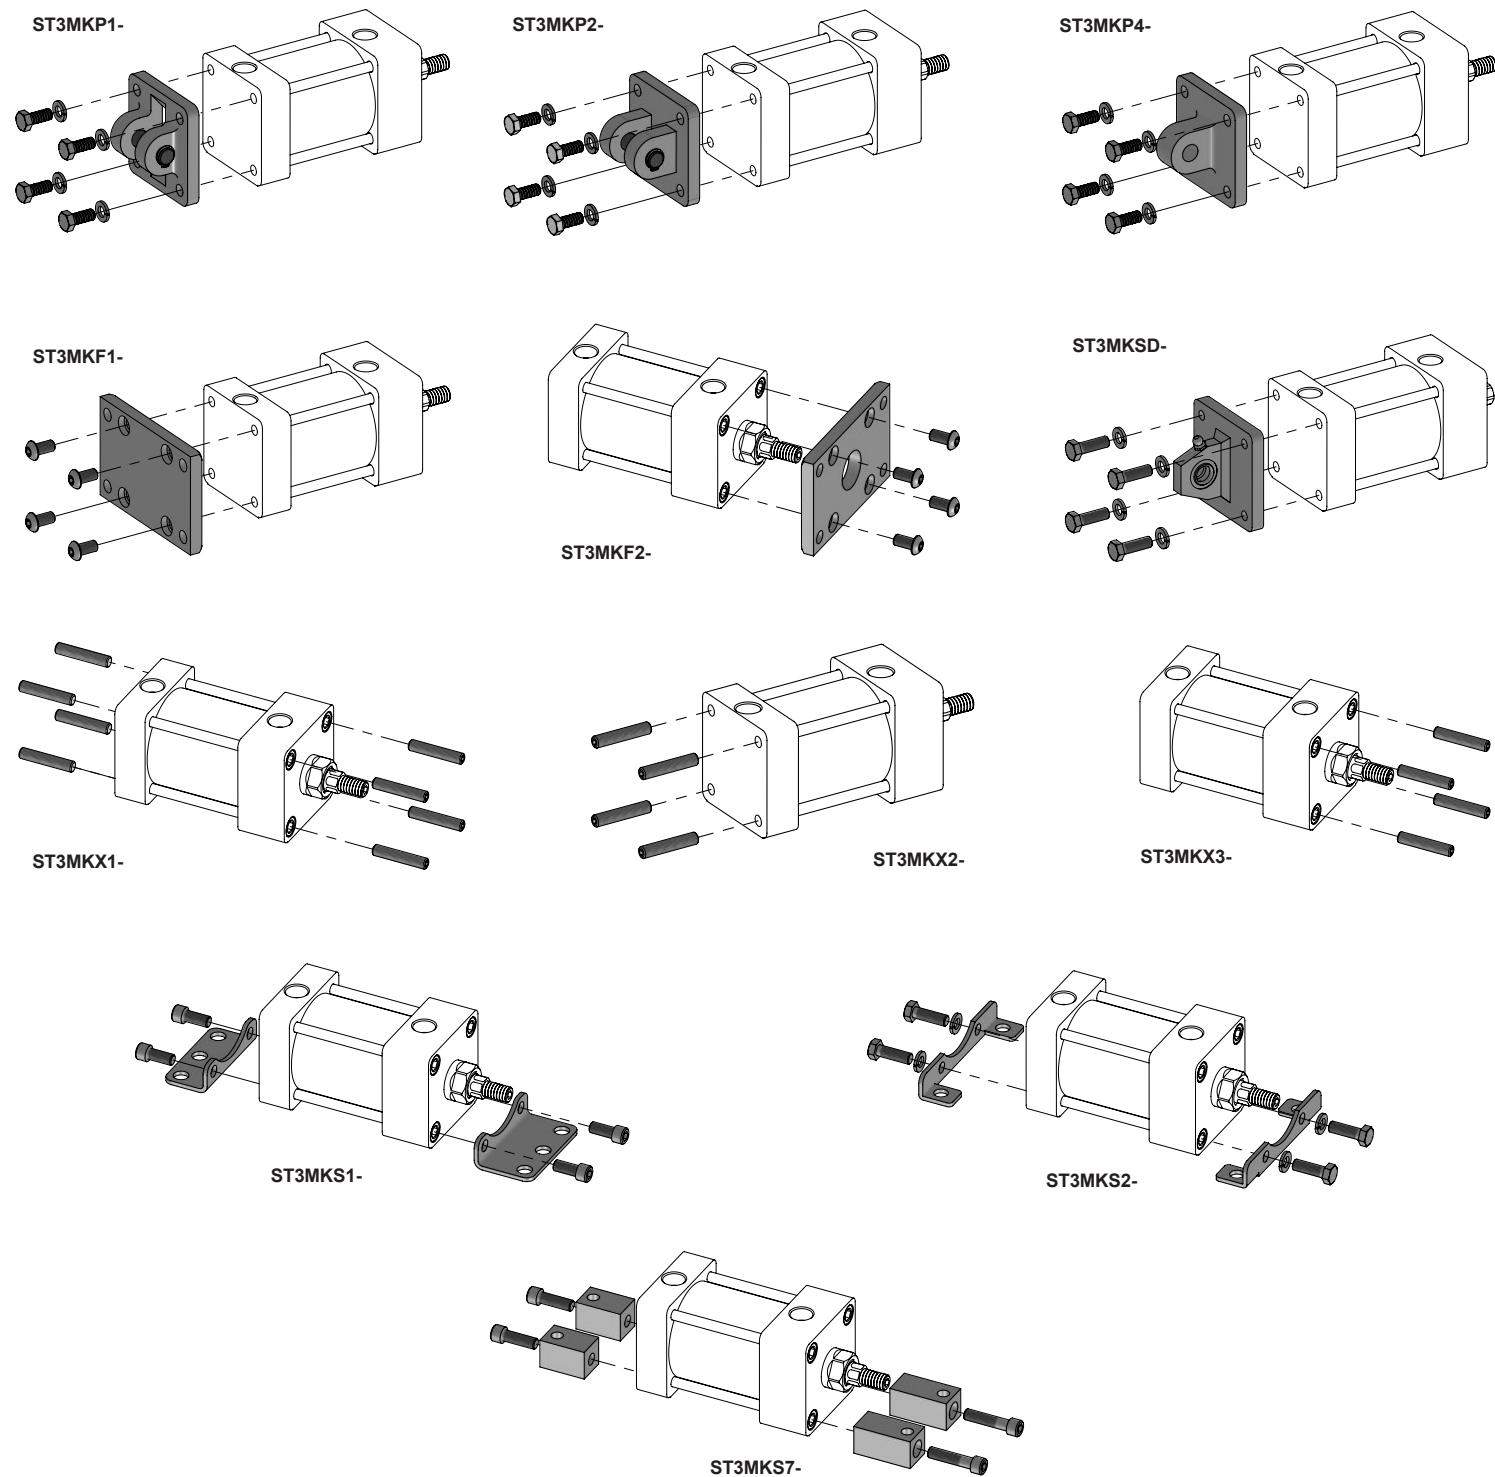

## STARCYL Manifold specifications


High Speed Cycling Cylinder with a single Manifold porting the cap as well as the head.  
Maximize Flow/Speed to the desire main direction

-NAM 1      NAM 0      C00

| FEATURE   | DESCRIPTION   | SYMBOL |
|-----------|---|--------|
| Head Port | Namur Mount Regular ( Mac 411 )   | NAM    |
|           | NAH Namur Mount with location for Heat Probe  | NAH    |
|           | M93 ( Mac series 93 ) Heat probe standard   | M93    |
| Head      | other   |        |
|           | For NAM and NAH only Location where to maximize flow in cylinder, and also location of the manifold (position 1, 2, 3 & 4), M93 is located middle of manifold | 1      |
| Cap Port  | Namur Mount Regular ( Mac 411 )   | NAM    |
|           | NAH Namur Mount with location for Heat Probe  | NAH    |
| Cap       | M93 ( Mac series 93 ) Heat probe standard   | M93    |
|           | other   |        |
| Cap       | NO Optimization and Location in this case will be driven from head, then "0" for regular flow from the valve to the cap thru the manifold                     | 0      |
|           |   |        |


### NAM0NAM1 - Manifold Namur Mount

NAM0NAM1 show in drawing below (Stroke up to 8")  
Valve can be installed in 2 positions - 0 & 180°


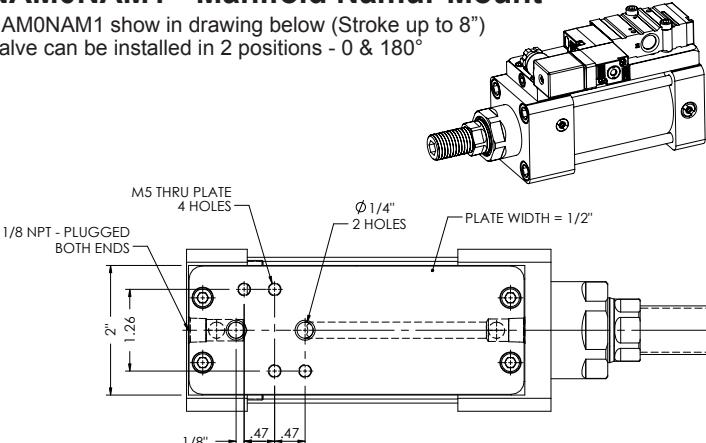


### Nxx1 NAM1 - Manifold Namur Mount long Stroke



Nxx1NAM1 show in drawing below - for Stroke of 8" and more  
(xx being standard NPT port per bore)

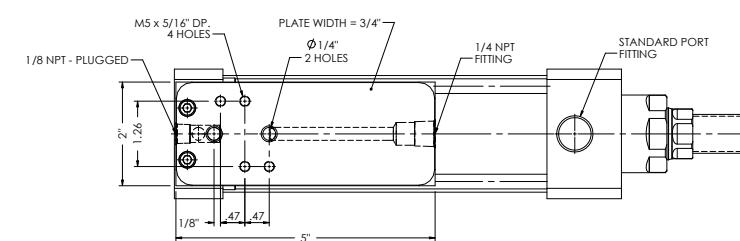


### NAH0NAH1 - Manifold Namur Mount with Heat Probe ready

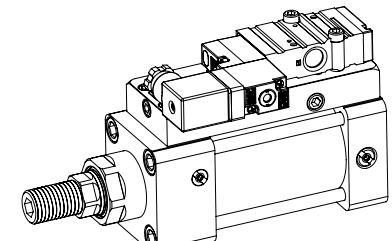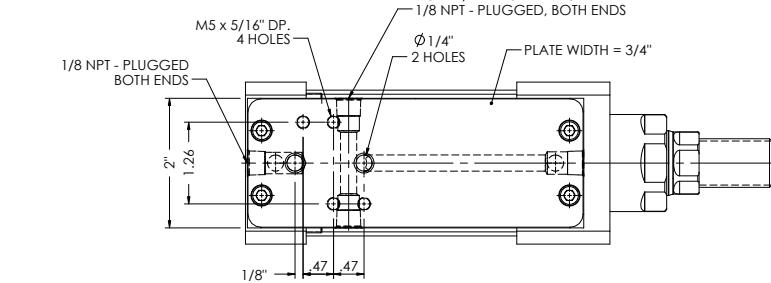

### M930M931 - Manifold M93 Mount (with Heat Probe ready)

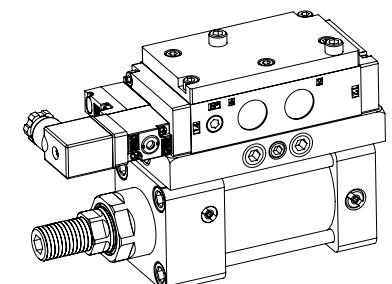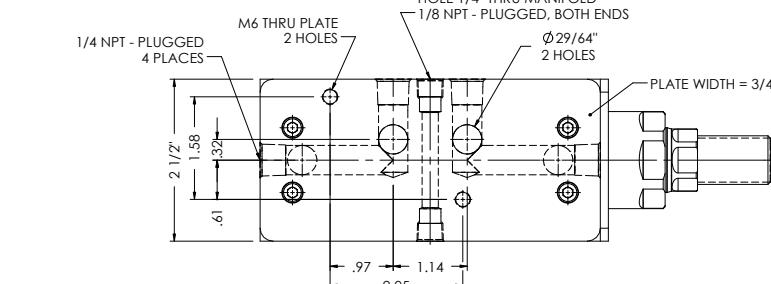

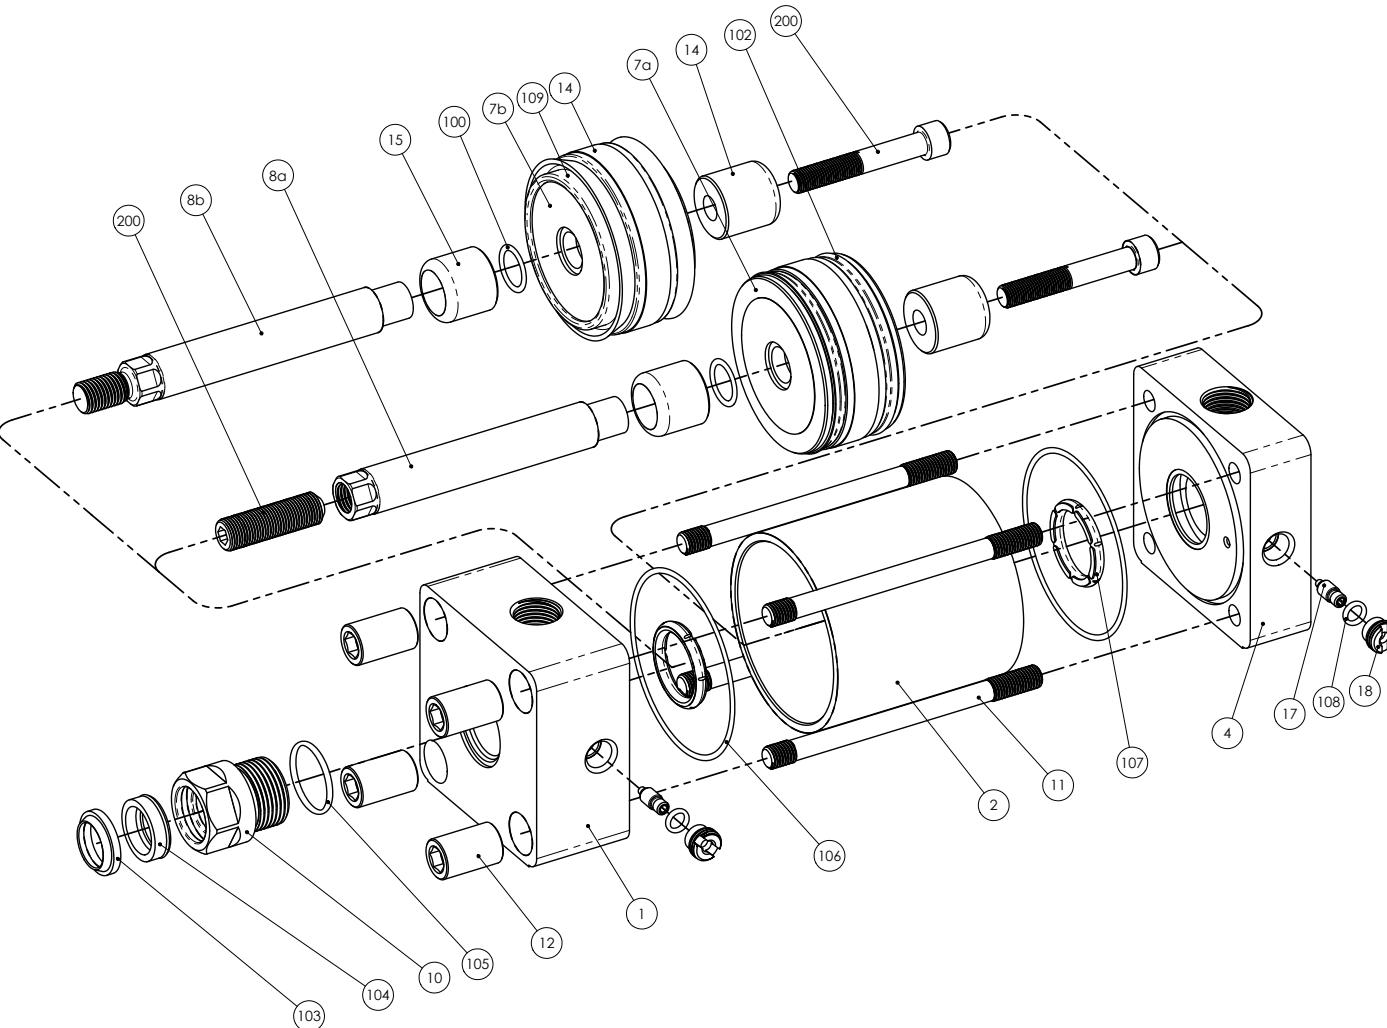

# STAR3 CYLINDERS

## HOW TO ORDER

**ST3 D\* F1 - 3.25 X 22.22 X 1.38 - #2**



| FEATURE | DESCRIPTION                 | SYMBOL |
|---------|-----------------------------|--------|
| SERIES  | Used in All ST3 part number | ST3    |

| FEATURE         | DESCRIPTION                                  | PAGE NO. | SYMBOL |
|-----------------|--|----------|--------|
| Double rod End  | Used only if double rod cylinder is required | 38       | DR     |
| Position Sensor | LVDT Ready ***                               | TBA      | XB     |
| Rod Lock        | RLA Rod Lock Mechanism - Not for SAFETY      | TBA      | RA     |
| Rod Lock        | RLS Rod Lock Mechanism - Not for SAFETY      | TBA      | RS     |
| Back-To-Back    | Back To back Cylinders                       | 40       | BB     |
| Multi-position  | Multi-position cylinders                     | 41       | MP     |
| Tandem          | Tandem Cylinders (Force and Control )        | 42       | TD     |

|                |                                      | 1.5"     | 7 to 14" |        |
|----------------|--------------------------------------|----------|----------|--------|
|                |                                      | Bore     | Bore     |        |
| FEATURE        | DESCRIPTION                          | PAGE NO. | PAGE NO. | SYMBOL |
| Mounting Style | Flush Mount - Basic Mount            | 6        | 24       | X5     |
|                | Side Tapped                          | 6        | 36       | S4     |
|                | No Mount                             | 6        | 26       | X0     |
|                | Head End Tie Rod Extended            | 8        | 26       | X3     |
|                | Cap End Tie Rods Extended            | 8        | 26       | X2     |
|                | Both End Tie Rod Extended            | 8        | 26       | X1     |
|                | Head Rectangular Flange Aluminum     | 10       | -        | F1     |
|                | Cap Rectangular Flange Aluminum      | 10       | -        | F2     |
|                | Head Rectangular Flange Steel        | 10       | -        | F1X    |
|                | Cap Rectangular Flange Steel         | 10       | -        | F2X    |
|                | Cap Pivot 1 Fixed Clevis             | 12       | 28       | P1     |
|                | Cap fixed Eye                        | 12       | 28       | P3     |
|                | Cap Pivot 2 Detachable Clevis        | 14       | 28       | P2     |
|                | Cap Pivot 4 Detachable Eye           | 14       | -        | P4     |
|                | Head Trunnion detachable             | 16       | 30       | T1     |
|                | Cap Trunnion detachable              | 16       | 30       | T2     |
|                | Head Trunnion all in one piece steel | 16       | -        | T1X    |
|                | Cap Trunnion all in one piece steel  | 16       | -        | T2X    |
|                | Intermediate Fixed Trunnion Xlx.xx   | 17       | 30       | T4     |
|                | Angle Mount                          | 18       | 32       | S1     |
|                | Fixed Side Lug Mount                 | 18       | -        | S2     |
|                | Side End Lugs                        | 18       | 34       | S7     |
|                | Cap Detachable Spherical Mount       | 20       | 36       | SD     |
|                | Square Head Mount                    | -        | 24       | E3     |
|                | Square Cap Mount                     | -        | 24       | E4     |


| FEATURE        | DESCRIPTION   | PAGE NO. | SYMBOL    |
|----------------|---|----------|-----------|
| Piston Rod End | Style #1 Intermediate Male                              | 32       | #1        |
|                | Style #2 Small Male                                     | 10       | #2        |
|                | Style #3 Full Male                                      | 6        | #3        |
|                | Style #4 Short Female                                   | 6        | #4        |
|                | Style #2S Male Studded ( standard on R0 rod 5/8 and 1") | 6        | #2S       |
|                | Style #5 Flange Coupling                                | TBA      | #5        |
|                | Style #6 Plain  | TBA      | #6        |
|                | Style #7 Spherical female                               | 20       | #7        |
|                | Style #X Special (Specify)                              |          | #X        |
|                | Style #M2 male metric and #M4 female metric             |          | #M2 / #M4 |

## HOW TO ORDER

# STAR3 CYLINDERS

## HOW TO ORDER

**-N081 N081‡ COO - PLURLU-R1-A1-FA - MP1**

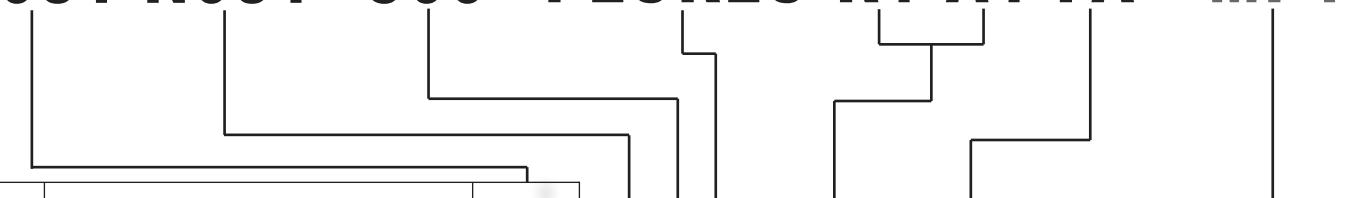

| FEATURE             | DESCRIPTION   | SYMBOL           |
|---------------------|---|------------------|
| Head Port           | NPT Port<br>SAE Straight Thread O-ring Port<br>British Parallel<br>British Tapered                        | N<br>S<br>G<br>R |
| Head Port Size      | NPT use 1/4=04,3/8=06,...,1-1/4=20<br>SAE use 04, 06, 08, 10, 12, 16<br>look at catalog for std port size |                  |
| Head Ports Location | Head Location Std 1 (2,3,4)   | 1                |

| FEATURE            | DESCRIPTION   | SYMBOL           |
|--------------------|---|------------------|
| Cap Port           | NPT Port<br>SAE Straight Thread O-ring Port<br>British Parallel<br>British Tapered                        | N<br>S<br>G<br>R |
| Cap Port Size      | NPT use 1/4=04,3/8=06,...,1-1/4=20<br>SAE use 04, 06, 08, 10, 12, 16<br>look at catalog for std port size |                  |
| Cap Ports Location | Cap Location Std 1 (2,3,4 & 5*)   | 1                |

| FEATURE            | DESCRIPTION  | SYMBOL                          |
|--------------------|--|---------------------------------|
| Cushion & Location | Head Non Cushion, Cap Non Cushion<br>Head Cushion Only (where x = position 1,2,3,4)<br>Cap Cushion Only (where x = position 1,2,3,4)<br>Non Adjustable Cushion<br>Cushion both ends (where x = position 1,2,3,4) | C00<br>Cx0<br>C0x<br>CNN<br>Cxx |

| FEATURE             | DESCRIPTION   | SYMBOL                                 |
|---------------------|---|--|
| Piston seals Option | Buna U-cup<br>Fluorocarbon U-cup<br><u>Blue Hythane asymmetric U-cup seals (std)</u><br>Energized Urethane U-cup<br>Energize Fluorocarbon U-cup<br><b>Bumper Seals Piston (former IR)</b> | PLB<br>PLV<br>PLU<br>PPU<br>PPV<br>PBS |

| FEATURE         | DESCRIPTION   | SYMBOL                                 |
|-----------------|---|--|
| Rod Seal Option | Buna U-cup<br>Fluorocarbon U-Cup<br><u>Blue Hythane asymmetric U-cup seals (std)</u><br>Energized Urethane U-cup<br>Heavy Duty Urethane U-cup<br>Energized Fluorocarbon U-cup | RLB<br>RLV<br>RLU<br>RPU<br>RHU<br>RPV |

| DESCRIPTION                                | PAGE | SYMBOL  |
|--|------|---------|
| Rod Extension C (length x.xx)              | 53   | Cx.xx   |
| Rod Extension WG (length x.xx) #5 ROD END  | 53   | Wgx.xx  |
| Thread Extension A (length x.xx)           | 53   | Ax.xx   |
| Magnetic Piston                            | 53   | M       |
| Rod Scraper (Brass/Buna expander)          | 53   | RSB     |
| Rod Scraper (Brass/Fluorocarbon expander)  | 53   | RSV     |
| Go Round sensors, Pos, 1 2 3 4             | 53   | G11     |
| EOS End of Stroke Sensors Prep only        | 53   | H11     |
| Stop Tube (length x.xx)                    | 53   | STx.xx  |
| Rod Boot prep only                         | TBA  | RB      |
| StarNite Rod up to 48" stroke              | -    | R0      |
| Chromed Rod                                | 54   | R1      |
| Chromed Rod (Induction Hard)               | 54   | R2      |
| Stainless Steel Rod 303 chrome plated      | 54   | S1      |
| Stainless Steel Rod 17-4 PH chrome plated  | 54   | S2      |
| Stainless Steel Rod 316 chrome plated      | 54   | S3      |
| Tie rods in Stainless 303/304              | 54   | TS1     |
| Tie rods Support (for stroke from 60" & +) | TBA  | ASUx.xx |
| Adjustable Stroke Up (specify length x.xx) | 54   | NRI     |
| Non Rotating Internal                      |      | NRE     |
| Non Rotating External                      |      | Xlx.xx  |
| Mid Trunnion Location                      |      |         |



STARCYL CYLINDER CORP

20 Ron Joye Road, Hemingway  
South Carolina, 29554  
1-877-STARCYL (782-7295)  
www.Starcyl.com

STARCYL CANADA INC

2340 Michelin Street, Laval  
Quebec, Canada, H7L 5C3  
1-877-STARCYL (782-7295)  
www.Starcyl.ca



**STAR1** - Multistage  
Upgradable air cylinders



**STAR4** - Heavy Duty  
NFPA interchangeable  
air cylinders  
Steel Construction

**STAR2** - NFPA style  
Mount spacesaver air cy-  
linders



**STAR5** - Medium Duty  
NFPA interchangeable  
Hydraulic cylinders  
Steel Construction



**SO** - Space One,  
Spacesaver Air Cylinder



**STAR6** - Heavy Duty  
NFPA interchangeable  
Hydraulic cylinders,  
3000 psi



**M3** - Heavy Duty NFPA  
Multi-stages air cylinders  
High Flow



**STMM** - Isometric se-  
ries ISO 6432 & 15552  
Air Cylinder

**WWW.STARCYL.COM**

In accordance with Starcyl's established policy of constant product improvement, the specifications contained in this document are subject to change without notice. Technical data listed in this document are based on the latest information available at the time of printing and are also subject to change without notice. For current information, please consult [www.starcyl.com](http://www.starcyl.com)

**STARCYL CYLINDER CORP**  
20 Ron Joye Road, Hemingway  
South Carolina, 29554  
1-843-896-0885  
Or 1-877-STARCYL  
[www.Starcyl.com](http://www.Starcyl.com)

**Catalog Version: STAR3-R08**  
**Dec 5, 2024**

**STARCYL CANADA INC**  
2340 Michelin Street, Laval  
Quebec, Canada, H7L 5C3  
1-877-STARCYL (782-7295)  
[www.Starcyl.ca](http://www.Starcyl.ca)

**YOUR STARCYL DISTRIBUTOR:**

**877-STARCYL**